

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219635

Luminaire Tested: **MRZ-1-REC-X-1H-L27-80-NFL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14873)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1H-L27-80-NFL-UNV-X-STD-SFL
Description: MRZ INTEGRAL LED DOWNLIGHT
25 DEGREE NARROW FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 1
Light Source: (1) 2700K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 629.3 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.41 / 0.41 / 0.4
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 6.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219635

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-NFL-UNV-X-STD-SFL

Luminous Intensity Polar Plot

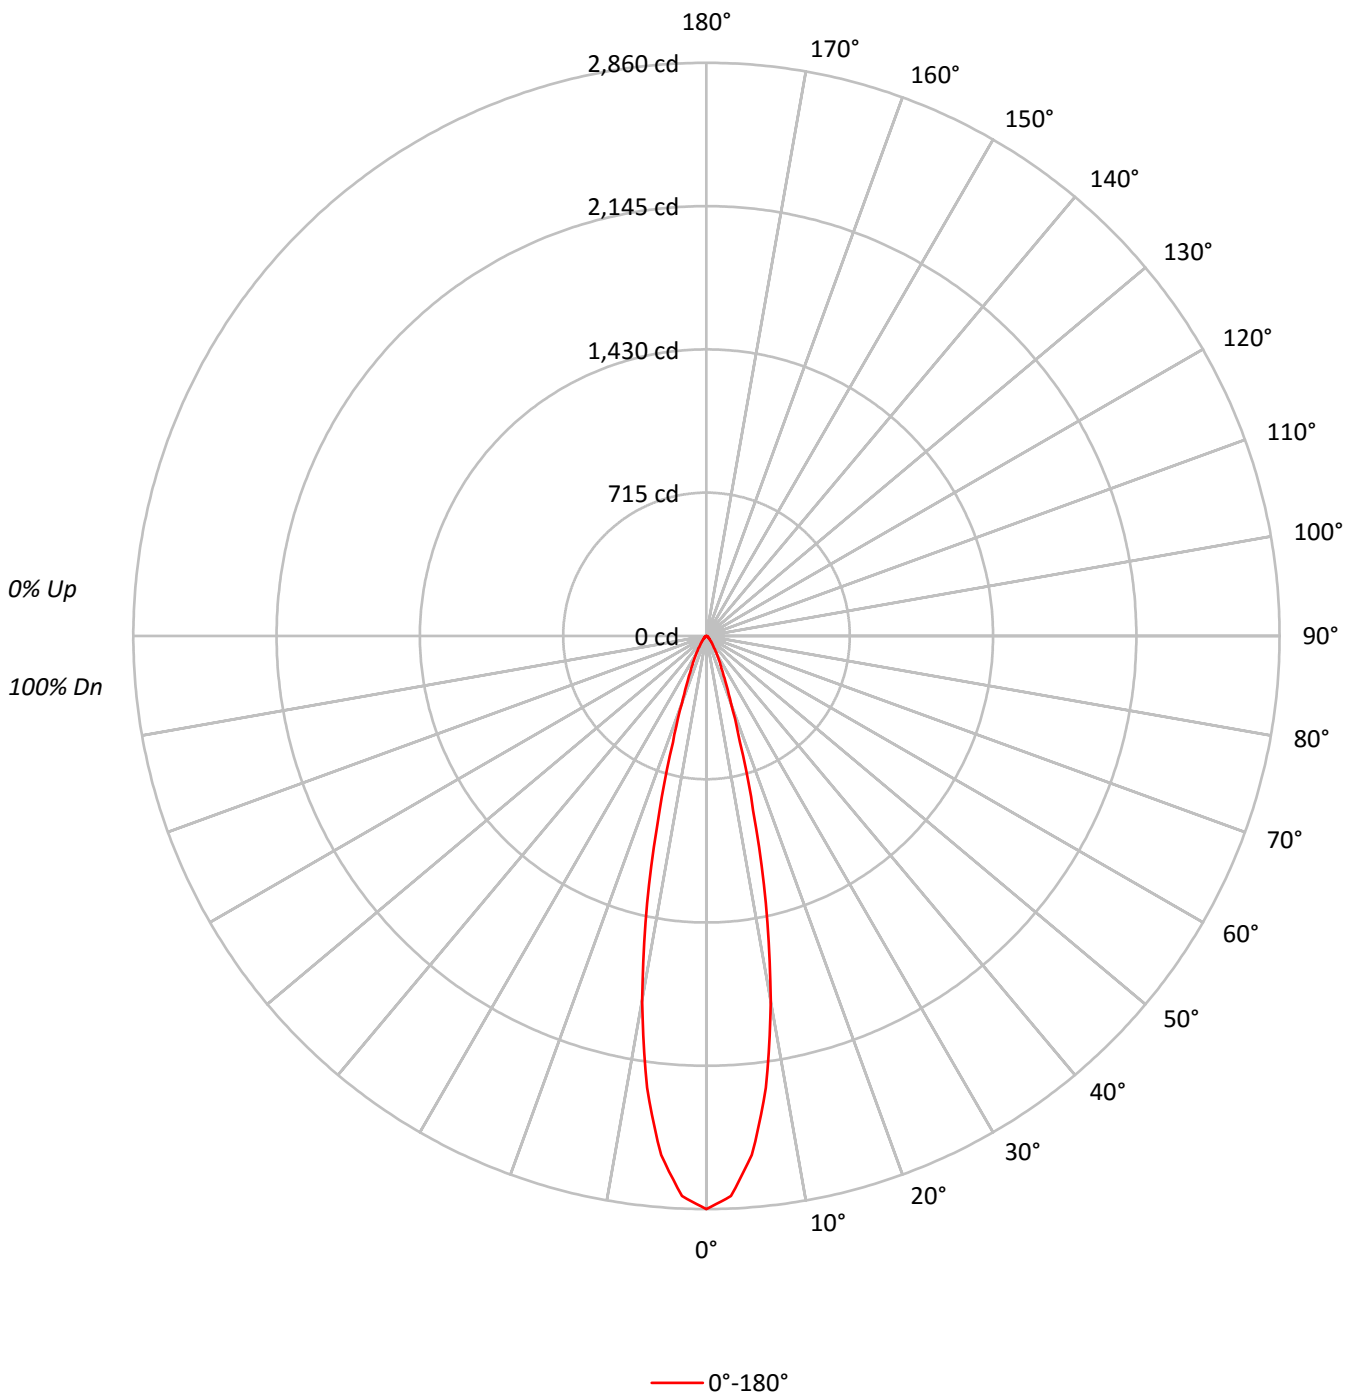



TEST NUMBER: P219635

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-NFL-UNV-X-STD-SFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	103	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89
4	103	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	85	90	87	85	89	86	84	83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	80
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78
8	92	85	80	77	91	84	80	77	83	80	77	82	79	77	82	79	76	75
9	89	82	78	75	88	82	78	75	81	77	75	80	77	74	79	76	74	73
10	87	80	76	73	86	79	75	73	79	75	73	78	75	72	77	74	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1411214
5°	1287340
10°	926131
15°	460063
20°	187441
25°	96737
30°	56800
35°	32946
40°	20739
45°	14094
50°	9211
55°	5763
60°	3651
65°	3502
70°	2164
75°	1334
80°	1989
85°	0



TEST NUMBER: P219635

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-NFL-UNV-X-STD-SFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	224.0	35.6
10°-20°	256.0	40.7
20°-30°	87.1	13.8
30°-40°	36.3	5.8
40°-50°	15.8	2.5
50°-60°	6.4	1.0
60°-70°	2.7	0.4
70°-80°	1.1	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	567.1	90.1
0°-40°	603.3	95.9
0°-60°	625.5	99.4
0°-90°	629.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	629.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2860	
5°	2599	224
15°	901	256
25°	178	87
35°	55	36
45°	20	16
55°	7	6
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P219635

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-NFL-UNV-X-STD-SFL

CANDELA DISTRIBUTION (FULL):

0°	
0°	2860.3
2.5°	2797.3
5°	2599.3
7.5°	2274.6
10°	1848.6
12.5°	1366.4
15°	900.7
17.5°	556.5
20°	357.0
22.5°	242.2
25°	177.7
27.5°	132.7
30°	99.7
32.5°	74.2
35°	54.7
37.5°	41.2
40°	32.2
42.5°	24.7
45°	20.2
47.5°	15.7
50°	12.0
52.5°	9.0
55°	6.7
57.5°	5.2
60°	3.7
62.5°	3.0
65°	3.0
67.5°	2.2
70°	1.5
72.5°	1.5
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)