

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219829

Luminaire Tested: **MRZ-1-REC-X-2-L27-80-WFL-UNV-X-STD**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219829
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14880)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-2-L27-80-WFL-UNV-X-STD
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC, LIGHT LEVEL2
Light Source: (1) 2700K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 837.8 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.91
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 8.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219829

CATALOG NUMBER: MRZ-1-REC-X-2-L27-80-WFL-UNV-X-STD

Luminous Intensity Polar Plot

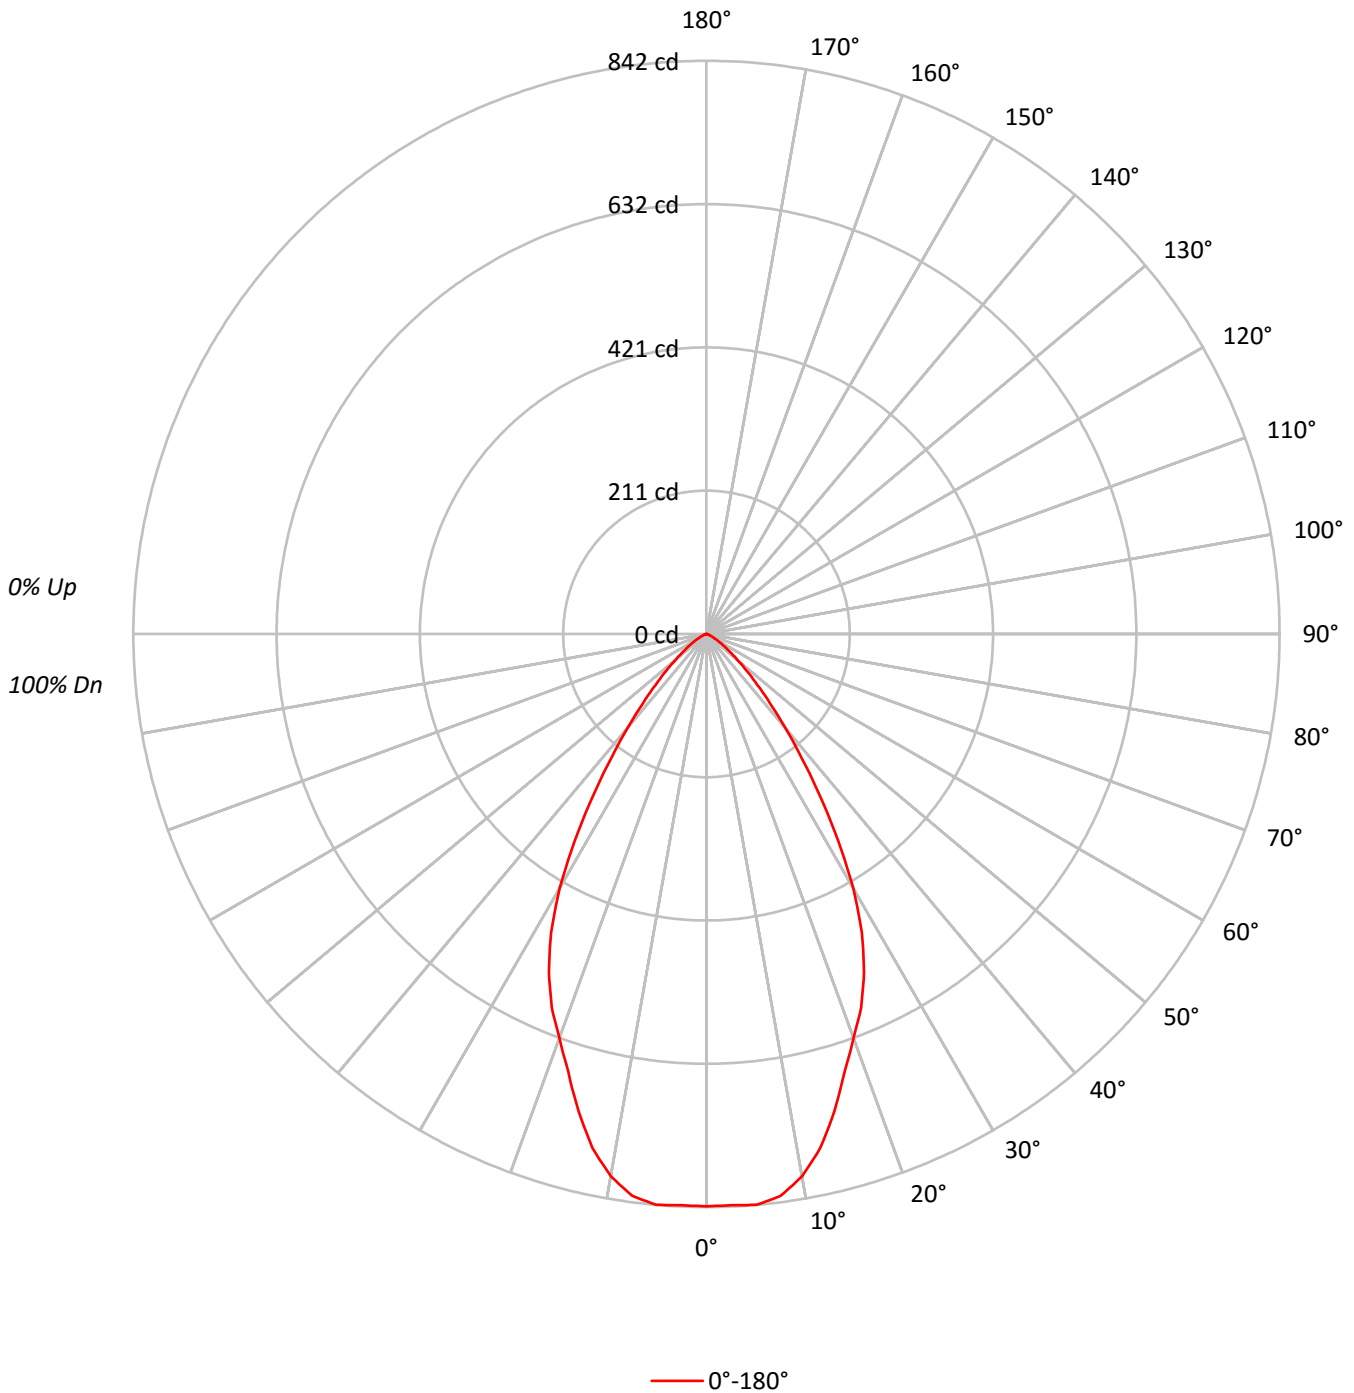



TEST NUMBER: P219829

CATALOG NUMBER: MRZ-1-REC-X-2-L27-80-WFL-UNV-X-STD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85	82	80	78
4	95	87	81	77	94	86	81	76	84	79	76		82	78	75		80	77	74	72
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75	71	68	67
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71	66	63	62
7	81	71	64	60	79	70	64	60	69	63	59		68	63	59		66	62	59	57
8	76	66	60	56	75	66	60	56	65	59	55		64	59	55		63	58	55	53
9	73	62	56	52	71	62	56	52	61	55	52		60	55	51		59	55	51	50
10	69	59	53	49	68	58	52	48	57	52	48		57	52	48		56	51	48	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	414883
5°	416963
10°	405352
15°	370829
20°	331670
25°	298105
30°	245372
35°	174789
40°	115609
45°	73682
50°	45670
55°	28214
60°	16183
65°	8406
70°	4472
75°	4003
80°	0
85°	0



TEST NUMBER: P219829

CATALOG NUMBER: MRZ-1-REC-X-2-L27-80-WFL-UNV-X-STD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.3	9.5
10°-20°	202.4	24.2
20°-30°	248.0	29.6
30°-40°	183.0	21.8
40°-50°	84.6	10.1
50°-60°	30.7	3.7
60°-70°	7.9	0.9
70°-80°	1.8	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	529.8	63.2
0°-40°	712.8	85.1
0°-60°	828.1	98.8
0°-90°	837.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	837.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	841	
5°	842	79
15°	726	202
25°	548	248
35°	290	183
45°	106	85
55°	33	31
65°	7	8
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P219829

CATALOG NUMBER: MRZ-1-REC-X-2-L27-80-WFL-UNV-X-STD

CANDELA DISTRIBUTION (FULL):

0°	
0°	840.9
2.5°	839.8
5°	841.9
7.5°	832.7
10°	809.1
12.5°	773.2
15°	726.0
17.5°	674.7
20°	631.7
22.5°	593.7
25°	547.6
27.5°	494.3
30°	430.7
32.5°	359.9
35°	290.2
37.5°	229.7
40°	179.5
42.5°	138.4
45°	105.6
47.5°	80.0
50°	59.5
52.5°	44.1
55°	32.8
57.5°	23.6
60°	16.4
62.5°	11.3
65°	7.2
67.5°	4.1
70°	3.1
72.5°	2.1
75°	2.1
77.5°	1.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)