

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P219589

Luminaire Tested: **MRZ-1-REC-X-3-L27-80-NFL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P219589  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14871)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: MRZ-1-REC-X-3-L27-80-NFL-UNV-X-STD-HEX  
Description: MRZ INTEGRAL LED DOWNLIGHT  
25 DEGREE NARROW FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 3  
Light Source: (1) 2700K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 849.0 lumens  
Efficiency: N/A  
Efficacy: 70.2 lumens/watt  
Spacing Criteria (0/90/45): 0.36 / 0.36 / 0.35  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 12.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219589

CATALOG NUMBER: MRZ-1-REC-X-3-L27-80-NFL-UNV-X-STD-HEX

### Luminous Intensity Polar Plot

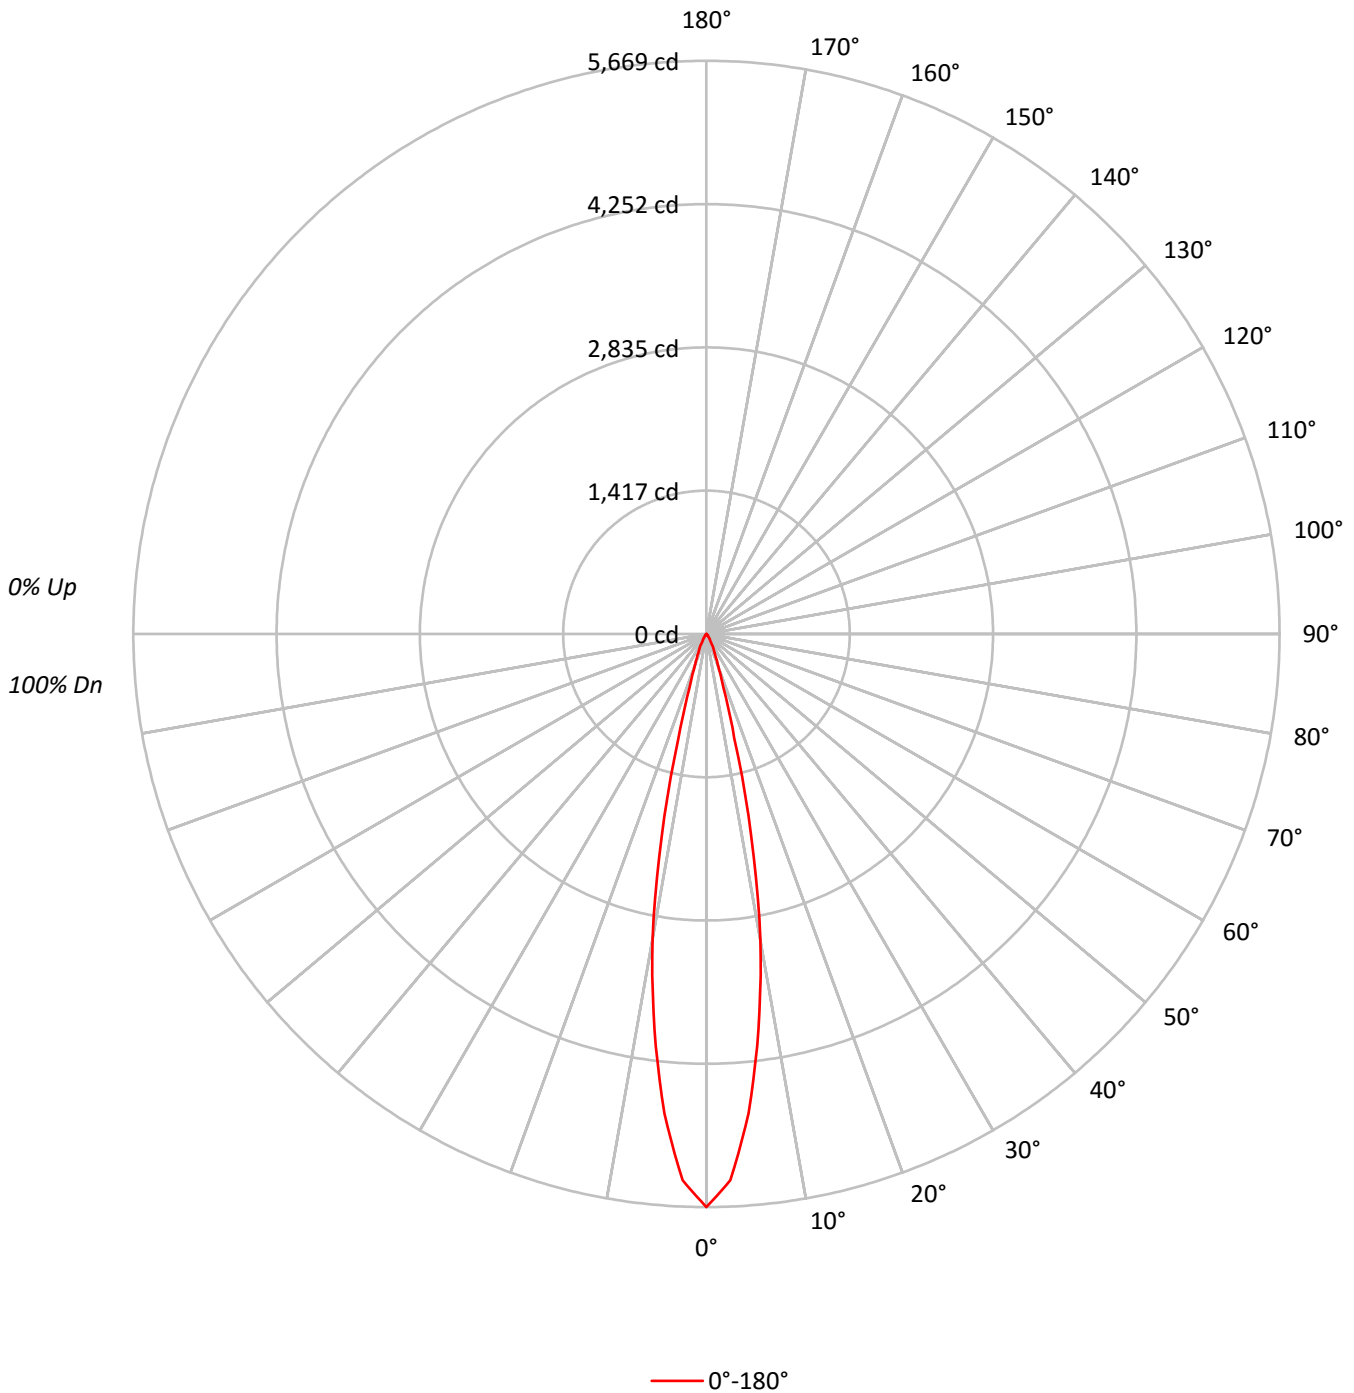



TEST NUMBER: P219589

CATALOG NUMBER: MRZ-1-REC-X-3-L27-80-NFL-UNV-X-STD-HEX

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95
3	109	105	101	99	107	103	100	98	101	99	97	99	97	95	97	95	94	92
4	106	101	98	95	105	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	92	102	97	94	91	96	93	91	94	92	90	93	91	89	88
6	101	95	92	89	100	95	91	89	93	90	88	92	90	88	91	89	87	86
7	99	93	89	87	98	92	89	86	91	88	86	90	88	86	89	87	85	84
8	96	91	87	84	95	90	87	84	89	86	84	88	86	84	88	85	83	82
9	94	88	85	82	94	88	85	82	87	84	82	87	84	82	86	83	82	81
10	92	86	83	81	92	86	83	81	86	82	80	85	82	80	84	82	80	79

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2797117
5°	2358002
10°	1540546
15°	543372
20°	175155
25°	90803
30°	42329
35°	19394
40°	9017
45°	4884
50°	2149
55°	1204
60°	1381
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P219589

CATALOG NUMBER: MRZ-1-REC-X-3-L27-80-NFL-UNV-X-STD-HEX

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	400.5	47.2
10°-20°	338.9	39.9
20°-30°	79.6	9.4
30°-40°	22.3	2.6
40°-50°	5.6	0.7
50°-60°	1.7	0.2
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	818.9	96.5
0°-40°	841.2	99.1
0°-60°	848.5	99.9
0°-90°	849.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	849.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5669	
5°	4761	400
15°	1064	339
25°	167	80
35°	32	22
45°	7	6
55°	1	2
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P219589

CATALOG NUMBER: MRZ-1-REC-X-3-L27-80-NFL-UNV-X-STD-HEX

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5669.3
2.5°	5407.2
5°	4761.1
7.5°	3942.5
10°	3075.0
12.5°	2043.5
15°	1063.8
17.5°	549.4
20°	333.6
22.5°	231.3
25°	166.8
27.5°	114.9
30°	74.3
32.5°	49.1
35°	32.2
37.5°	21.0
40°	14.0
42.5°	9.8
45°	7.0
47.5°	4.2
50°	2.8
52.5°	2.8
55°	1.4
57.5°	1.4
60°	1.4
62.5°	1.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)