

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P219937

Luminaire Tested: **MRZ-1-REC-X-4-L27-80-WFL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P219937  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14883)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: MRZ-1-REC-X-4-L27-80-WFL-UNV-X-STD-SFL  
Description: MRZ INTEGRAL LED DOWNLIGHT  
55 DEGREE WIDE FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 4  
Light Source: (1) 2700K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1368.0 lumens  
Efficiency: N/A  
Efficacy: 86.6 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.9  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 15.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219937

CATALOG NUMBER: MRZ-1-REC-X-4-L27-80-WFL-UNV-X-STD-SFL

### Luminous Intensity Polar Plot

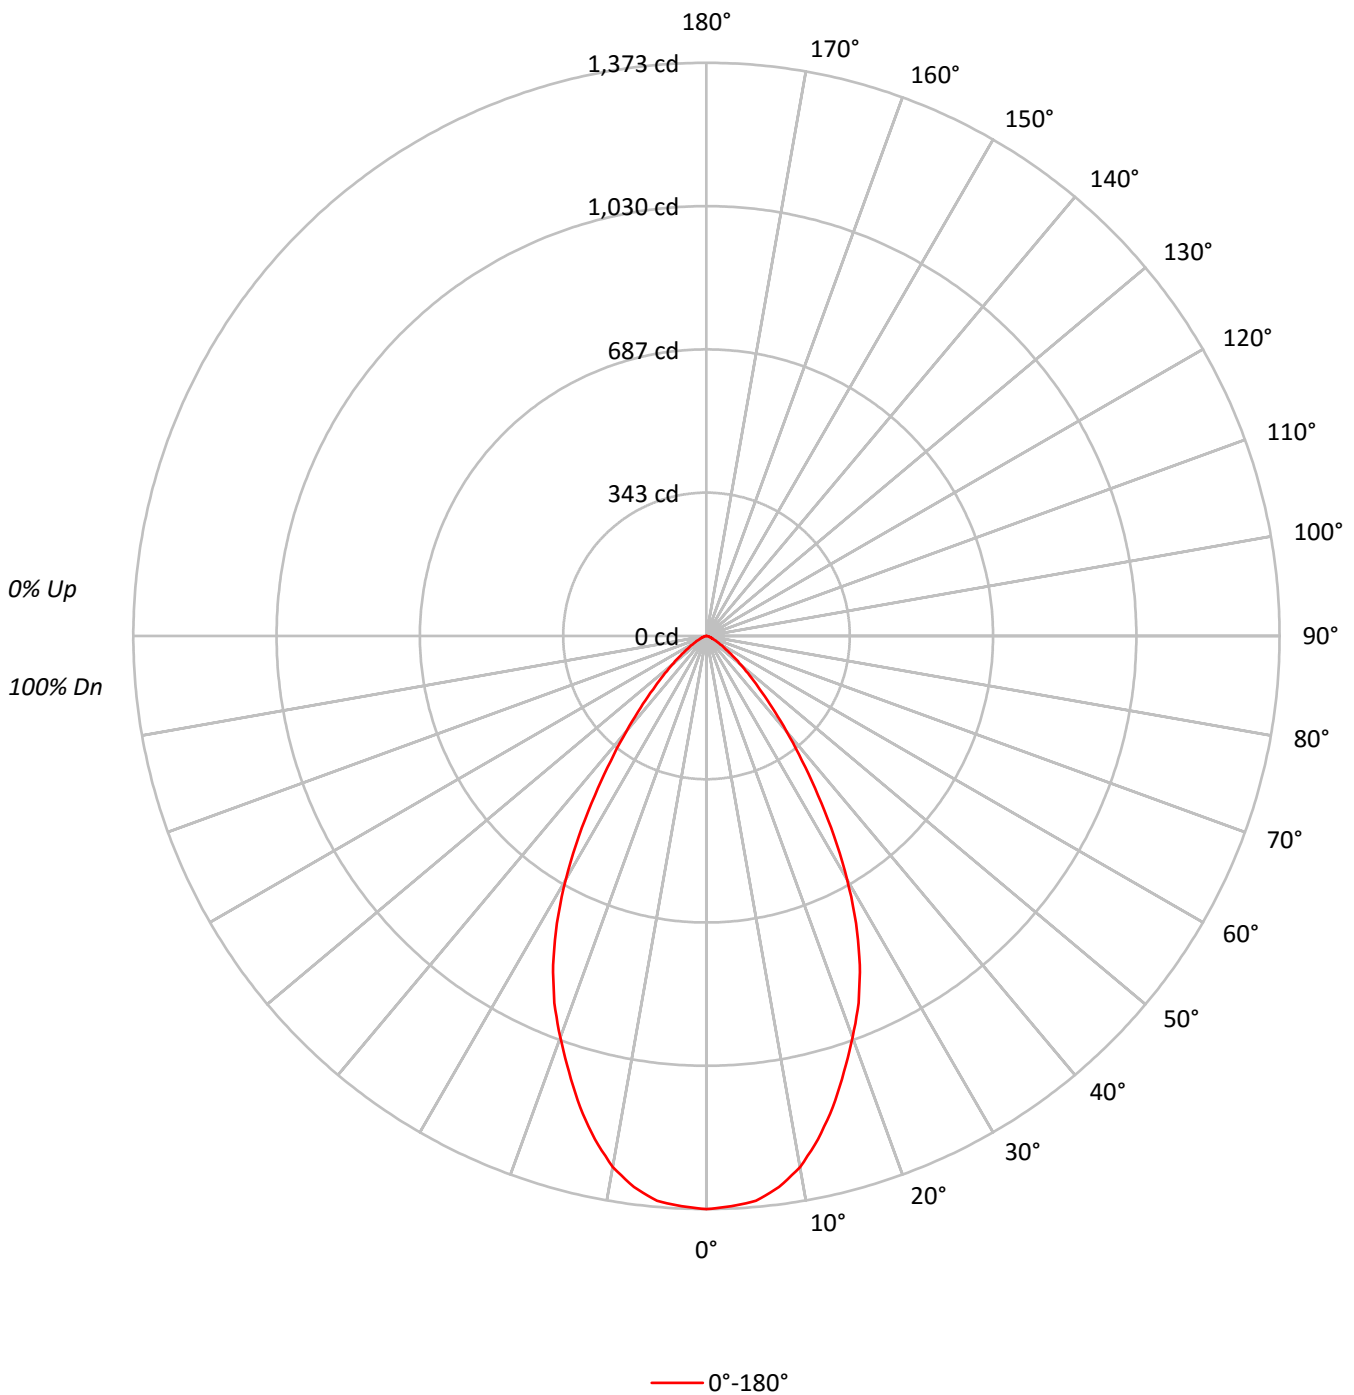



TEST NUMBER: P219937

CATALOG NUMBER: MRZ-1-REC-X-4-L27-80-WFL-UNV-X-STD-SFL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	677410
5°	672866
10°	647430
15°	596953
20°	537382
25°	473233
30°	383925
35°	280674
40°	191608
45°	126292
50°	82513
55°	52385
60°	33648
65°	20897
70°	15579
75°	10294
80°	5114
85°	0



TEST NUMBER: P219937

CATALOG NUMBER: MRZ-1-REC-X-4-L27-80-WFL-UNV-X-STD-SFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	127.5	9.3
10°-20°	326.1	23.8
20°-30°	394.0	28.8
30°-40°	293.2	21.4
40°-50°	144.4	10.6
50°-60°	57.1	4.2
60°-70°	19.6	1.4
70°-80°	5.9	0.4
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	847.6	62.0
0°-40°	1140.7	83.4
0°-60°	1342.2	98.1
0°-90°	1368.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1368.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1373	
5°	1359	127
15°	1169	326
25°	869	394
35°	466	293
45°	181	144
55°	61	57
65°	18	20
75°	5	6
85°	0	0
90°	0	



TEST NUMBER: P219937

CATALOG NUMBER: MRZ-1-REC-X-4-L27-80-WFL-UNV-X-STD-SFL

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1373.0
2.5°	1367.6
5°	1358.6
7.5°	1331.8
10°	1292.3
12.5°	1235.0
15°	1168.7
17.5°	1095.2
20°	1023.5
22.5°	951.8
25°	869.3
27.5°	776.1
30°	673.9
32.5°	568.2
35°	466.0
37.5°	376.4
40°	297.5
42.5°	233.0
45°	181.0
47.5°	139.8
50°	107.5
52.5°	80.7
55°	60.9
57.5°	44.8
60°	34.1
62.5°	25.1
65°	17.9
67.5°	14.3
70°	10.8
72.5°	7.2
75°	5.4
77.5°	3.6
80°	1.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)