

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P226110

Luminaire Tested: **MRZ-1-REC-X-1-L27-97-NFL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P226110
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14873)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1-L27-97-NFL-UNV-X-STD-SFL
Description: MRZ INTEGRAL LED DOWNLIGHT
25 DEGREE NARROW FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 1
Light Source: (1) 2700K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 400.9 lumens
Efficiency: N/A
Efficacy: 74.2 lumens/watt
Spacing Criteria (0/90/45): 0.41 / 0.41 / 0.4
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 5.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P226110

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-NFL-UNV-X-STD-SFL

Luminous Intensity Polar Plot

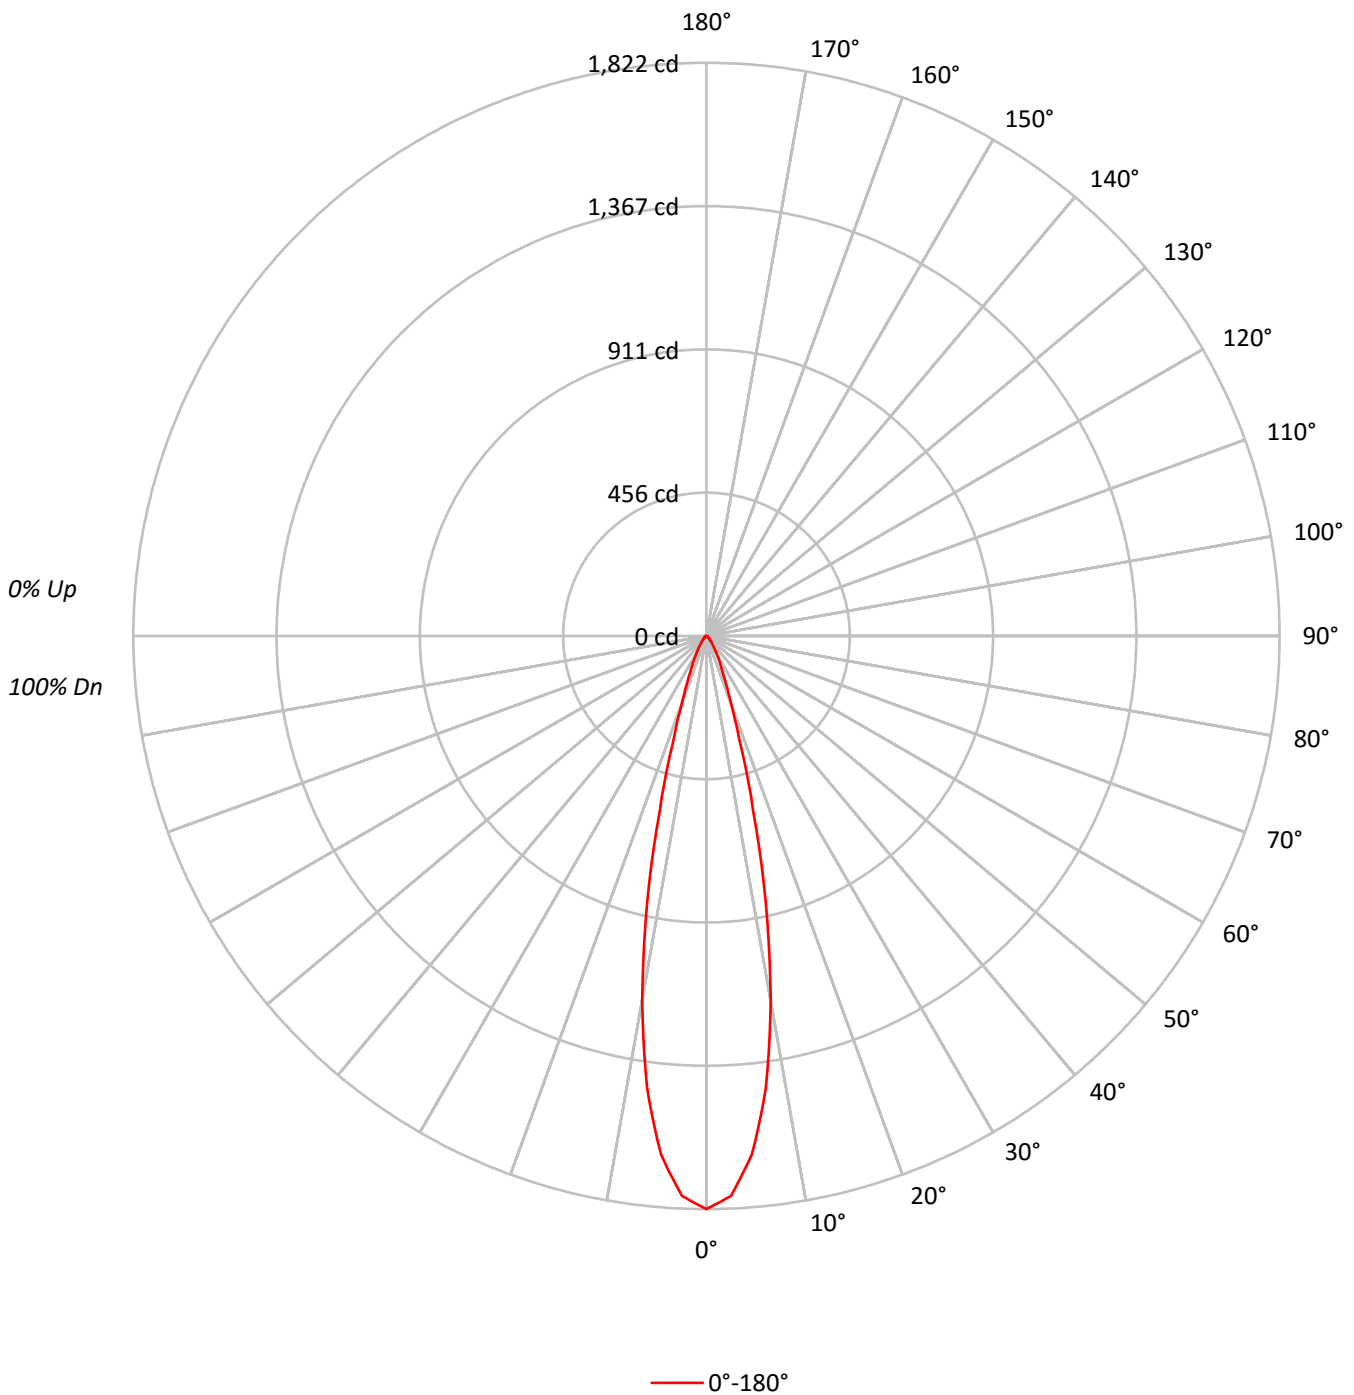



TEST NUMBER: P226110

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-NFL-UNV-X-STD-SFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	103	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89
4	103	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	85	90	87	85	89	86	84	83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	80
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78
8	92	85	80	77	91	84	80	77	83	80	77	82	79	77	82	79	76	75
9	89	82	78	75	88	82	78	75	81	77	75	80	77	74	79	76	74	73
10	87	80	76	73	86	79	75	73	79	75	73	78	75	72	77	74	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	898839
5°	819959
10°	589917
15°	292986
20°	119395
25°	61624
30°	36233
35°	21020
40°	13203
45°	9001
50°	5910
55°	3699
60°	2368
65°	2218
70°	1443
75°	763
80°	1137
85°	0



TEST NUMBER: P226110

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-NFL-UNV-X-STD-SFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	142.7	35.6
10°-20°	163.0	40.7
20°-30°	55.5	13.8
30°-40°	23.1	5.8
40°-50°	10.1	2.5
50°-60°	4.1	1.0
60°-70°	1.7	0.4
70°-80°	0.7	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	361.2	90.1
0°-40°	384.3	95.9
0°-60°	398.4	99.4
0°-90°	400.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	400.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1822	
5°	1656	143
15°	574	163
25°	113	55
35°	35	23
45°	13	10
55°	4	4
65°	2	2
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P226110

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-NFL-UNV-X-STD-SFL

CANDELA DISTRIBUTION (FULL):

	0°
0°	1821.8
2.5°	1781.7
5°	1655.6
7.5°	1448.7
10°	1177.5
12.5°	870.3
15°	573.6
17.5°	354.4
20°	227.4
22.5°	154.3
25°	113.2
27.5°	84.5
30°	63.6
32.5°	47.3
35°	34.9
37.5°	26.2
40°	20.5
42.5°	15.8
45°	12.9
47.5°	10.0
50°	7.7
52.5°	5.7
55°	4.3
57.5°	3.3
60°	2.4
62.5°	1.9
65°	1.9
67.5°	1.4
70°	1.0
72.5°	1.0
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)