

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P226115

Luminaire Tested: **MRZ-1-REC-X-1-L27-97-WFL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P226115
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14883)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1-L27-97-WFL-UNV-X-STD-SFL
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 1
Light Source: (1) 2700K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 364.6 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.9
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 5.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P226115

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-WFL-UNV-X-STD-SFL

Luminous Intensity Polar Plot

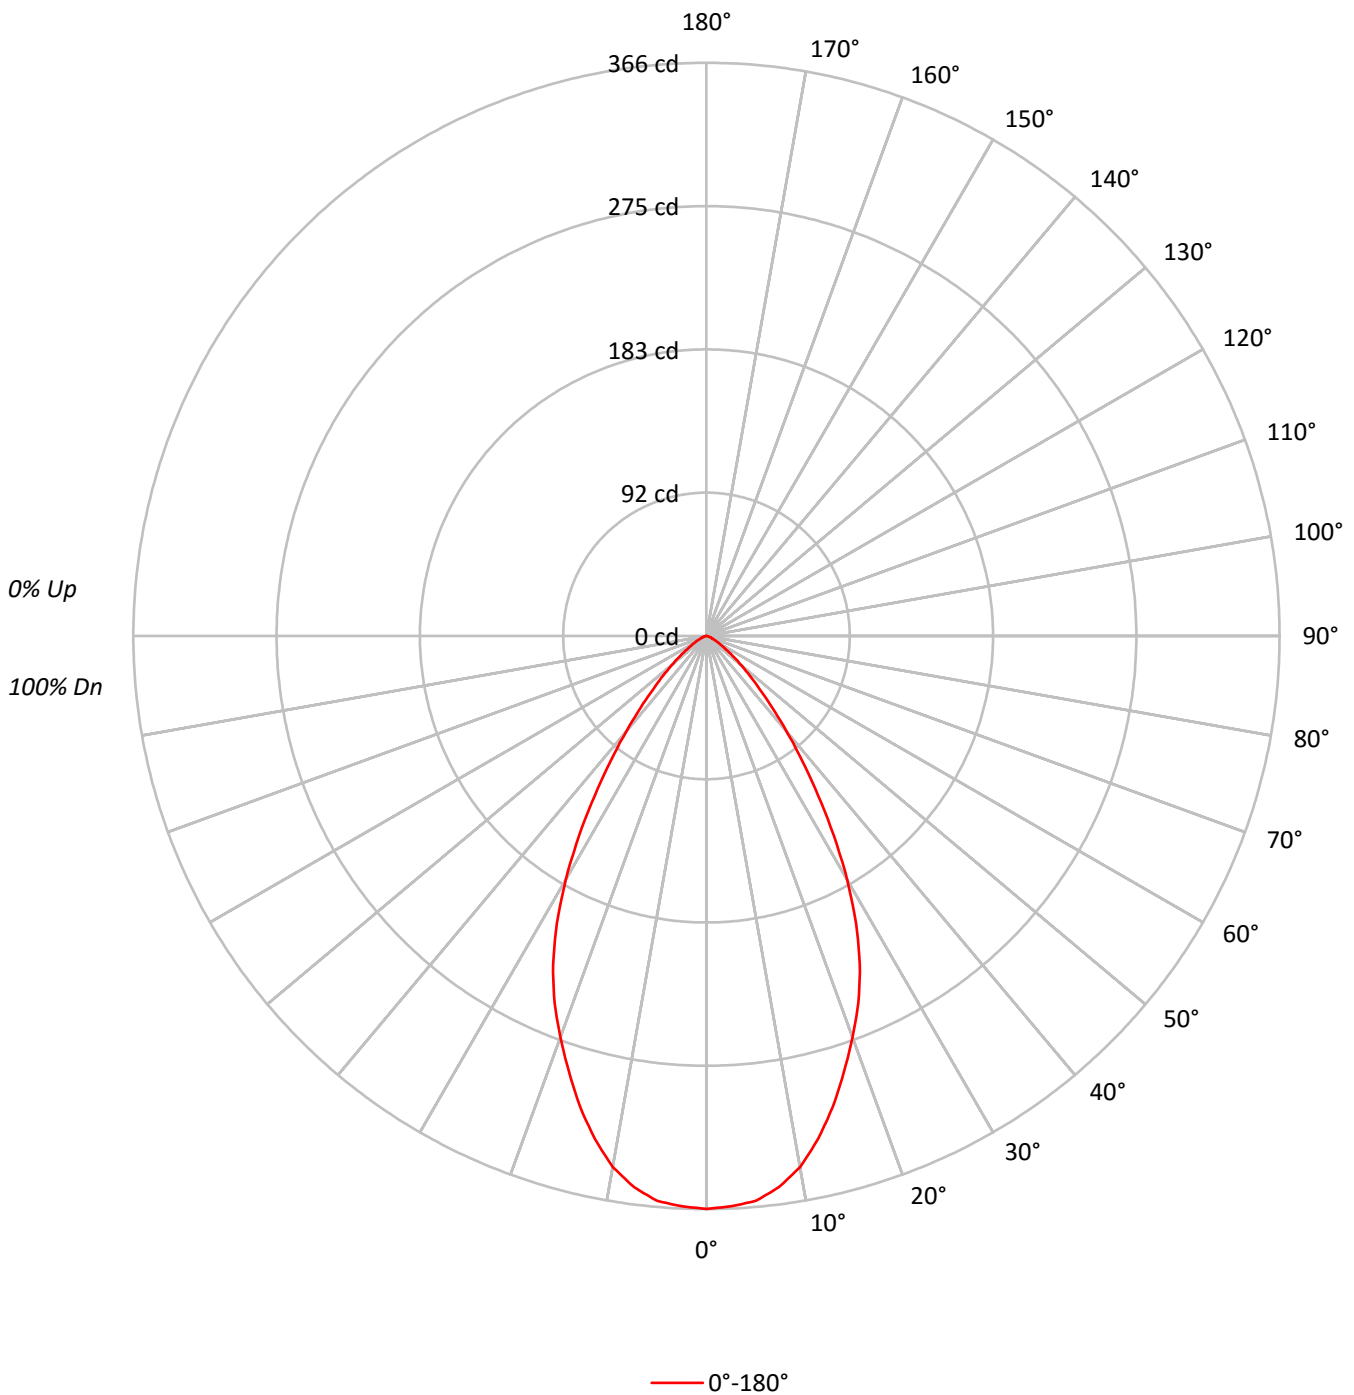



TEST NUMBER: P226115

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-WFL-UNV-X-STD-SFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	180528
5°	179335
10°	172541
15°	159109
20°	143179
25°	126134
30°	102319
35°	74806
40°	51074
45°	33631
50°	22029
55°	13935
60°	8980
65°	5604
70°	4183
75°	2669
80°	1137
85°	0



TEST NUMBER: P226115

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-WFL-UNV-X-STD-SFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.0	9.3
10°-20°	86.9	23.8
20°-30°	105.0	28.8
30°-40°	78.1	21.4
40°-50°	38.5	10.6
50°-60°	15.2	4.2
60°-70°	5.2	1.4
70°-80°	1.6	0.4
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	225.9	62.0
0°-40°	304.0	83.4
0°-60°	357.7	98.1
0°-90°	364.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	364.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	366	
5°	362	34
15°	312	87
25°	232	105
35°	124	78
45°	48	38
55°	16	15
65°	5	5
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P226115

CATALOG NUMBER: MRZ-1-REC-X-1-L27-97-WFL-UNV-X-STD-SFL

CANDELA DISTRIBUTION (FULL):

0°	
0°	365.9
2.5°	364.5
5°	362.1
7.5°	354.9
10°	344.4
12.5°	329.1
15°	311.5
17.5°	291.8
20°	272.7
22.5°	253.6
25°	231.7
27.5°	206.8
30°	179.6
32.5°	151.4
35°	124.2
37.5°	100.3
40°	79.3
42.5°	62.1
45°	48.2
47.5°	37.2
50°	28.7
52.5°	21.5
55°	16.2
57.5°	12.0
60°	9.1
62.5°	6.7
65°	4.8
67.5°	3.8
70°	2.9
72.5°	1.9
75°	1.4
77.5°	1.0
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)