

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219833

Luminaire Tested: **MRZ-1-REC-X-2-L27-97-WFL-UNV-X-STD**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219833
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14880)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-2-L27-97-WFL-UNV-X-STD
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC, LIGHT LEVEL2
Light Source: (1) 2700K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 597.7 lumens
Efficiency: N/A
Efficacy: 67.9 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.91
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 8.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219833

CATALOG NUMBER: MRZ-1-REC-X-2-L27-97-WFL-UNV-X-STD

Luminous Intensity Polar Plot

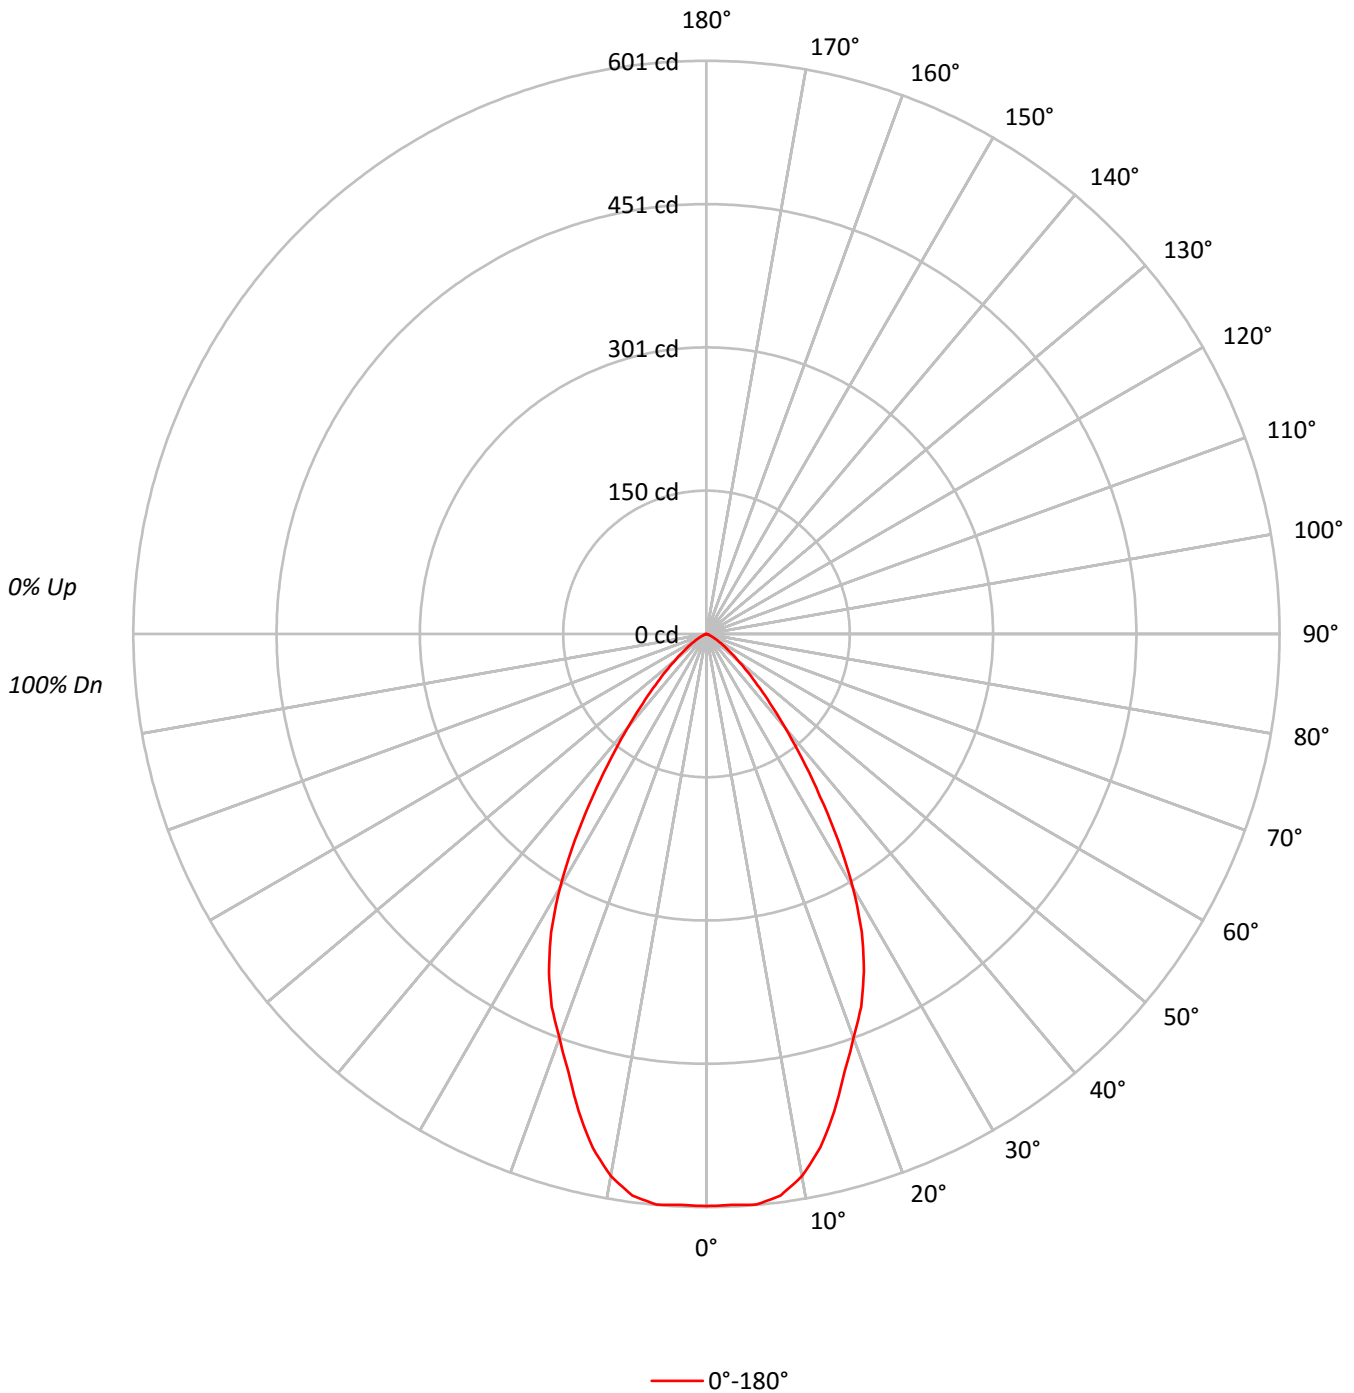



TEST NUMBER: P219833

CATALOG NUMBER: MRZ-1-REC-X-2-L27-97-WFL-UNV-X-STD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85	82	80	78
4	95	87	81	77	94	86	81	76	84	79	76		82	78	75		80	77	74	72
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75	71	68	67
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71	66	63	62
7	81	71	64	60	79	70	64	60	69	63	59		68	63	59		66	62	59	57
8	76	66	60	56	75	66	60	56	65	59	55		64	59	55		63	58	55	53
9	73	62	56	52	71	62	56	52	61	55	52		60	55	51		59	55	51	50
10	69	59	53	49	68	58	52	48	57	52	48		57	52	48		56	51	48	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	295978
5°	297505
10°	289222
15°	264586
20°	236637
25°	212691
30°	175071
35°	124737
40°	82440
45°	52610
50°	32545
55°	20128
60°	11545
65°	5954
70°	3174
75°	2859
80°	0
85°	0



TEST NUMBER: P219833

CATALOG NUMBER: MRZ-1-REC-X-2-L27-97-WFL-UNV-X-STD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.6	9.5
10°-20°	144.4	24.2
20°-30°	177.0	29.6
30°-40°	130.5	21.8
40°-50°	60.4	10.1
50°-60°	21.9	3.7
60°-70°	5.6	0.9
70°-80°	1.3	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	378.0	63.2
0°-40°	508.5	85.1
0°-60°	590.8	98.8
0°-90°	597.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	597.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	600	
5°	601	57
15°	518	144
25°	391	177
35°	207	131
45°	75	60
55°	23	22
65°	5	6
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P219833

CATALOG NUMBER: MRZ-1-REC-X-2-L27-97-WFL-UNV-X-STD

CANDELA DISTRIBUTION (FULL):

	0°
0°	599.9
2.5°	599.2
5°	600.7
7.5°	594.1
10°	577.3
12.5°	551.7
15°	518.0
17.5°	481.4
20°	450.7
22.5°	423.6
25°	390.7
27.5°	352.7
30°	307.3
32.5°	256.8
35°	207.1
37.5°	163.9
40°	128.0
42.5°	98.8
45°	75.4
47.5°	57.1
50°	42.4
52.5°	31.5
55°	23.4
57.5°	16.8
60°	11.7
62.5°	8.0
65°	5.1
67.5°	2.9
70°	2.2
72.5°	1.5
75°	1.5
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)