

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P14871

Luminaire Tested: **MRZ-1-REC-X-3-L27-97-NFL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P14871
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-3-L27-97-NFL-UNV-X-STD-HEX
Description: MRZ INTEGRAL LED DOWNLIGHT
25 DEGREE NARROW FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 3
Light Source: (1) 2700K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 605.8 lumens
Efficiency: N/A
Efficacy: 50.9 lumens/watt
Spacing Criteria (0/90/45): 0.36 / 0.36 / 0.35
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 11.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P14871

CATALOG NUMBER: MRZ-1-REC-X-3-L27-97-NFL-UNV-X-STD-HEX

Luminous Intensity Polar Plot

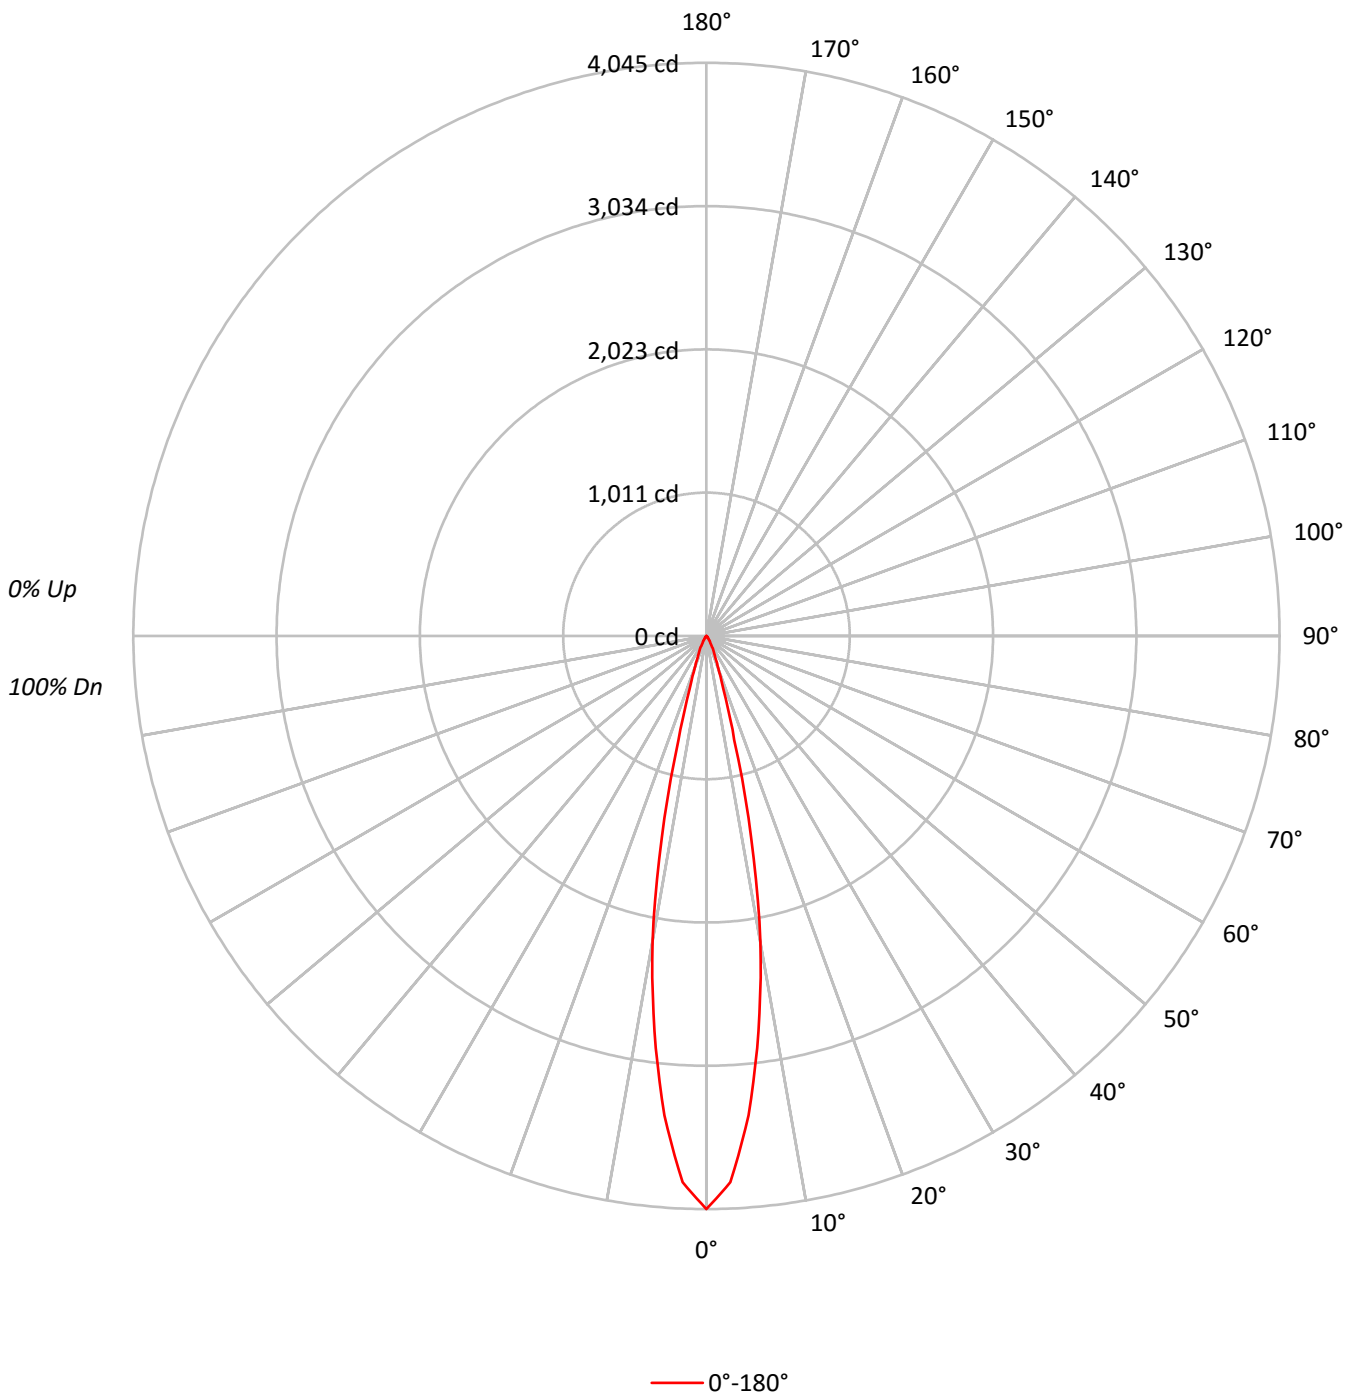



TEST NUMBER: P14871

CATALOG NUMBER: MRZ-1-REC-X-3-L27-97-NFL-UNV-X-STD-HEX

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10							
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10				
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	102	100	100	100	100
1	115	113	112	110	113	111	110	108	107	106	105	105	104	103	102	102	100	100	99	99	97	97	97	97
2	112	109	106	104	110	107	105	103	104	102	100	100	101	100	98	98	99	97	96	96	95	95	95	95
3	109	105	101	99	107	103	100	98	101	99	97	97	99	97	95	95	97	95	94	94	92	92	92	92
4	106	101	98	95	105	100	97	94	98	95	93	93	96	94	92	92	95	93	91	91	90	90	90	90
5	103	98	94	92	102	97	94	91	96	93	91	91	94	92	90	90	93	91	89	89	88	88	88	88
6	101	95	92	89	100	95	91	89	93	90	88	88	92	90	88	88	91	89	87	87	86	86	86	86
7	99	93	89	87	98	92	89	86	91	88	86	86	90	88	86	86	89	87	85	85	84	84	84	84
8	96	91	87	84	95	90	87	84	89	86	84	84	88	86	84	84	88	85	83	83	82	82	82	82
9	94	88	85	82	94	88	85	82	87	84	82	82	87	84	82	82	86	83	82	82	81	81	81	81
10	92	86	83	81	92	86	83	81	86	82	80	80	85	82	80	80	84	82	80	80	79	79	79	79

AVERAGE LUMINANCE (cd/sqm):

0°	
0°	1995720
5°	1682412
10°	1099174
15°	387685
20°	124960
25°	64782
30°	30194
35°	13853
40°	6441
45°	3489
50°	1535
55°	860
60°	987
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P14871

CATALOG NUMBER: MRZ-1-REC-X-3-L27-97-NFL-UNV-X-STD-HEX

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	285.7	47.2
10°-20°	241.8	39.9
20°-30°	56.8	9.4
30°-40°	15.9	2.6
40°-50°	4.0	0.7
50°-60°	1.2	0.2
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	584.3	96.5
0°-40°	600.2	99.1
0°-60°	605.4	99.9
0°-90°	605.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	605.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4045	
5°	3397	286
15°	759	242
25°	119	57
35°	23	16
45°	5	4
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P14871

CATALOG NUMBER: MRZ-1-REC-X-3-L27-97-NFL-UNV-X-STD-HEX

CANDELA DISTRIBUTION (FULL):

0°	
0°	4045
2.5°	3858
5°	3397
7.5°	2813
10°	2194
12.5°	1458
15°	759
17.5°	392
20°	238
22.5°	165
25°	119
27.5°	82
30°	53
32.5°	35
35°	23
37.5°	15
40°	10
42.5°	7
45°	5
47.5°	3
50°	2
52.5°	2
55°	1
57.5°	1
60°	1
62.5°	1
65°	0
67.5°	0
70°	0
72.5°	0
75°	0
77.5°	0
80°	0
82.5°	0
85°	0
87.5°	0
90°	0

(END OF REPORT)