

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219730

Luminaire Tested: **MRZ-1-REC-X-1H-L35-80-FL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219730
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14876)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1H-L35-80-FL-UNV-X-STD-HEX
Description: MRZ INTEGRAL LED DOWNLIGHT
40 DEGREE FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 1
Light Source: (1) 3500K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 412.0 lumens
Efficiency: N/A
Efficacy: 60.6 lumens/watt
Spacing Criteria (0/90/45): 0.56 / 0.56 / 0.55
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 6.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219730

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-80-FL-UNV-X-STD-HEX

Luminous Intensity Polar Plot

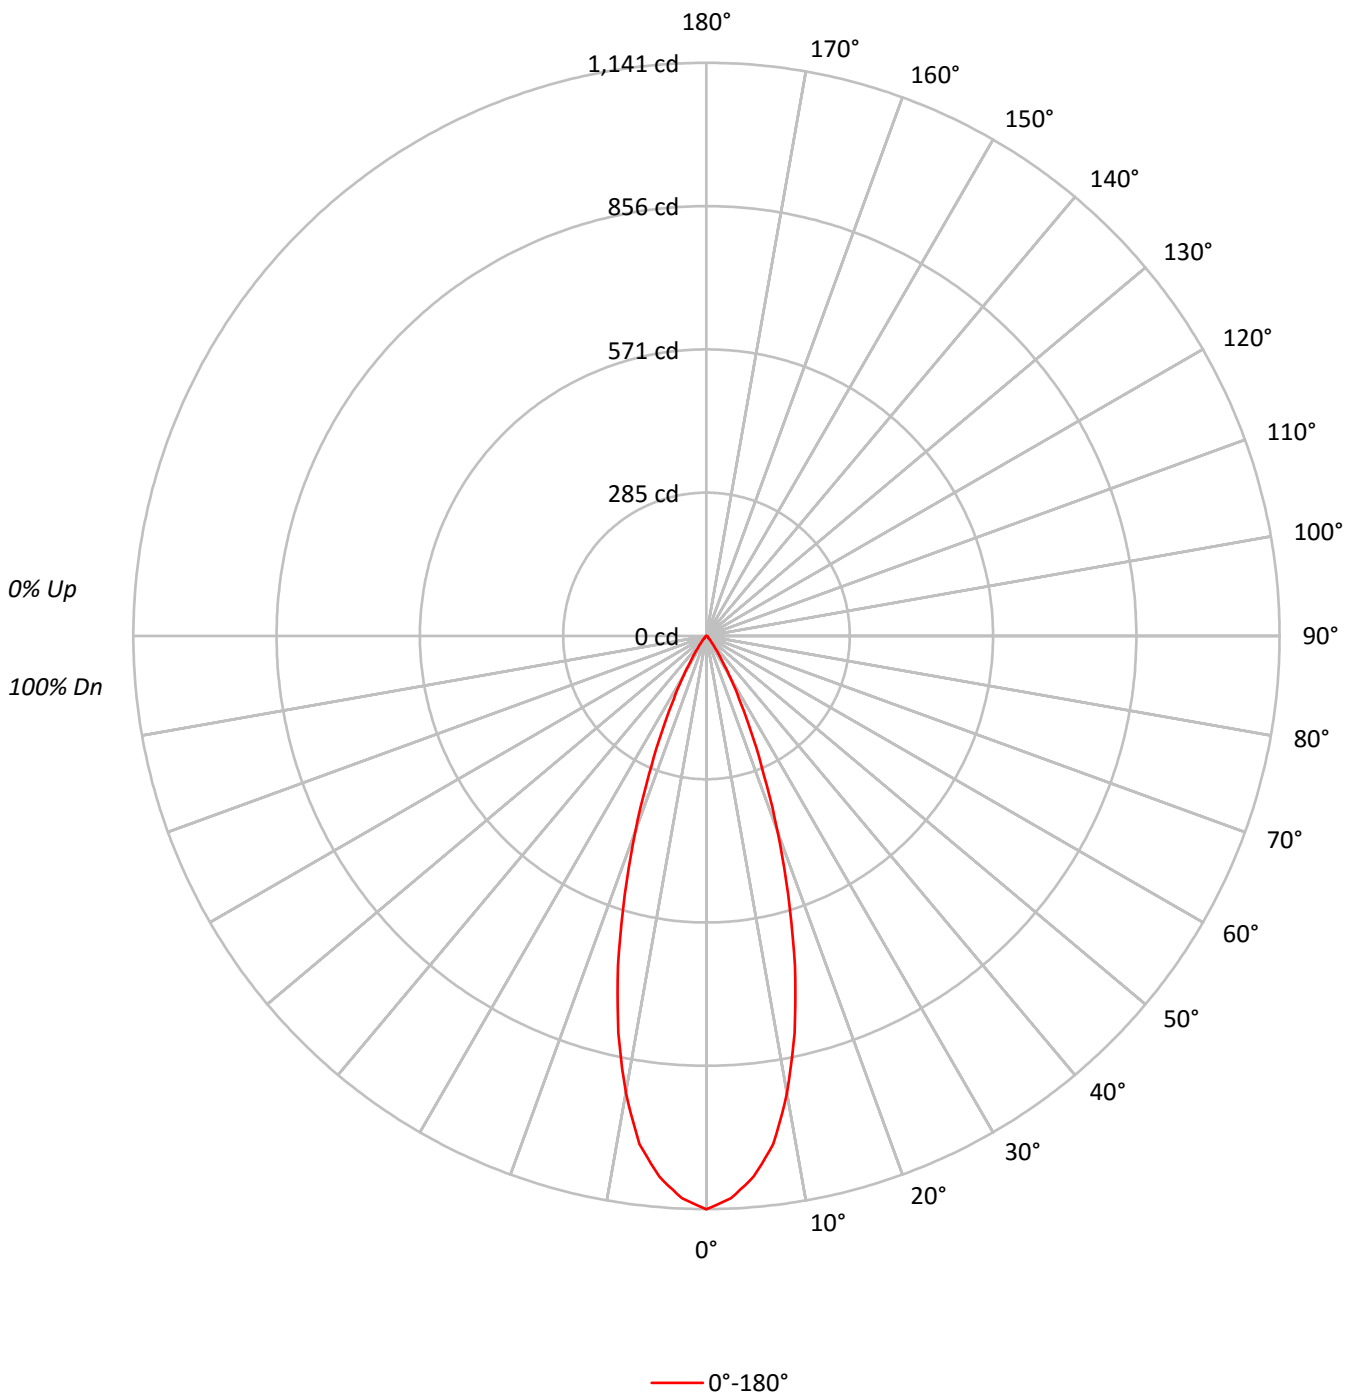



TEST NUMBER: P219730

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-80-FL-UNV-X-STD-HEX

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81
6	95	88	84	80	94	88	83	80	86	83	80	85	82	79	84	81	79	78
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	75
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69
10	83	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	68	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	563143
5°	535034
10°	462765
15°	347078
20°	216370
25°	113667
30°	51274
35°	19816
40°	7729
45°	3907
50°	1842
55°	1376
60°	789
65°	934
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P219730

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-80-FL-UNV-X-STD-HEX

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.4	23.9
10°-20°	183.6	44.6
20°-30°	99.6	24.2
30°-40°	24.1	5.9
40°-50°	4.5	1.1
50°-60°	1.2	0.3
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	381.6	92.6
0°-40°	405.8	98.5
0°-60°	411.5	99.9
0°-90°	412.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	412.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1141	
5°	1080	98
15°	680	184
25°	209	100
35°	33	24
45°	6	5
55°	2	1
65°	1	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P219730

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-80-FL-UNV-X-STD-HEX

CANDELA DISTRIBUTION (FULL):

0°	
0°	1141.4
2.5°	1120.5
5°	1080.3
7.5°	1020.1
10°	923.7
12.5°	809.7
15°	679.5
17.5°	540.6
20°	412.1
22.5°	298.0
25°	208.8
27.5°	140.6
30°	90.0
32.5°	55.4
35°	32.9
37.5°	20.1
40°	12.0
42.5°	8.0
45°	5.6
47.5°	3.2
50°	2.4
52.5°	1.6
55°	1.6
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)