

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P219560

Luminaire Tested: **MRZ-1-REC-X-3-L35-80-NFL-UNV-X-STD**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P219560  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14859)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: MRZ-1-REC-X-3-L35-80-NFL-UNV-X-STD  
Description: MRZ INTEGRAL LED DOWNLIGHT  
25 DEGREE NARROW FLOOD OPTIC, LIGHT LEVEL 3  
Light Source: (1) 3500K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1310.6 lumens  
Efficiency: N/A  
Efficacy: 110.1 lumens/watt  
Spacing Criteria (0/90/45): 0.41 / 0.41 / 0.37  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219560  
CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-NFL-UNV-X-STD

### Luminous Intensity Polar Plot

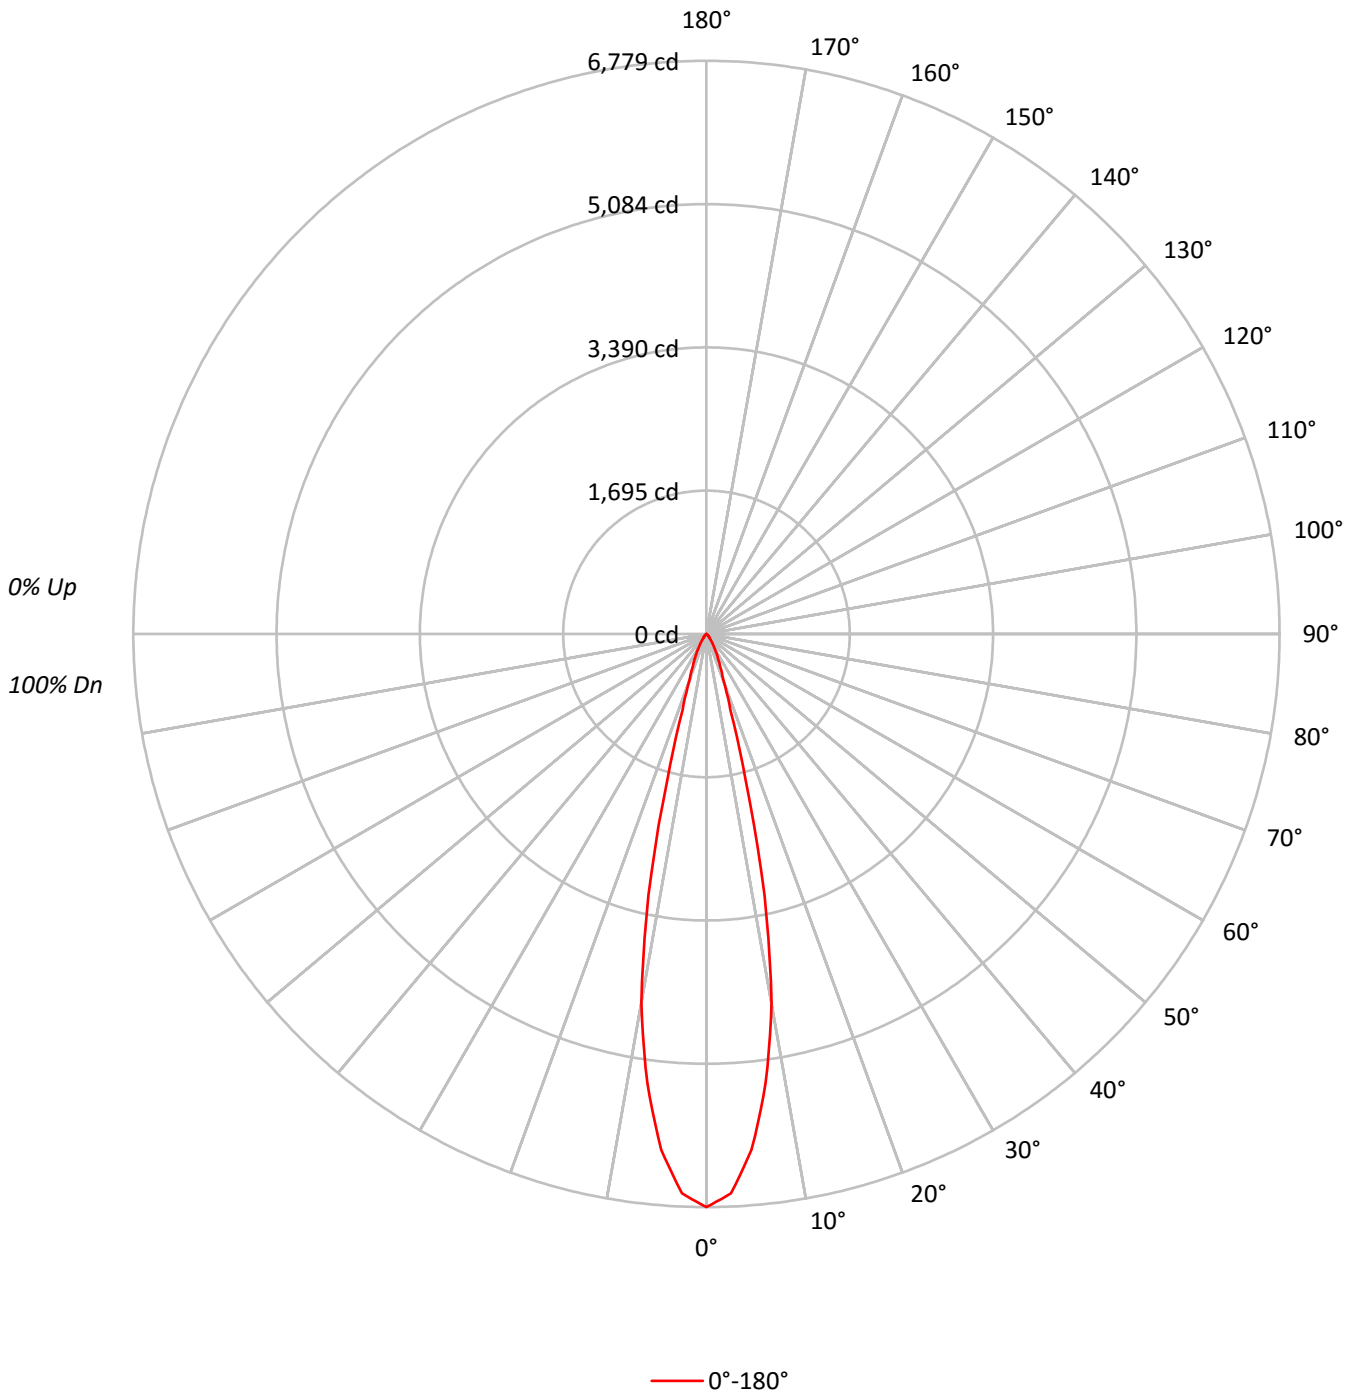



TEST NUMBER: P219560

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-NFL-UNV-X-STD

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100	99	98	97
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		95	93	92	91
4	105	99	96	93	103	98	95	92	96	93	91		95	92	90		93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88		92	89	87		91	88	86	85
6	99	93	89	86	98	92	88	86	91	88	85		90	87	85		88	86	84	83
7	96	90	86	83	95	89	86	83	88	85	83		87	84	82		86	84	82	81
8	94	87	83	81	93	87	83	81	86	83	80		85	82	80		84	82	80	79
9	91	85	81	78	91	85	81	78	84	80	78		83	80	78		82	80	78	77
10	89	83	79	76	89	83	79	76	82	78	76		81	78	76		81	78	76	75

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3344620
5°	3032503
10°	2220792
15°	905518
20°	308936
25°	180572
30°	100895
35°	54268
40°	28983
45°	18839
50°	8059
55°	5161
60°	2960
65°	1751
70°	2164
75°	2859
80°	0
85°	0



TEST NUMBER: P219560

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-NFL-UNV-X-STD

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	529.9	40.4
10°-20°	535.7	40.9
20°-30°	156.5	11.9
30°-40°	59.9	4.6
40°-50°	20.1	1.5
50°-60°	5.5	0.4
60°-70°	2.0	0.2
70°-80°	1.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1222.0	93.2
0°-40°	1282.0	97.8
0°-60°	1307.6	99.8
0°-90°	1310.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1310.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6779	
5°	6123	530
15°	1773	536
25°	332	156
35°	90	60
45°	27	20
55°	6	5
65°	2	2
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P219560

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-NFL-UNV-X-STD

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6779.0
2.5°	6622.9
5°	6123.0
7.5°	5360.5
10°	4432.8
12.5°	3167.3
15°	1772.8
17.5°	941.2
20°	588.4
22.5°	436.8
25°	331.7
27.5°	247.7
30°	177.1
32.5°	127.6
35°	90.1
37.5°	63.0
40°	45.0
42.5°	34.5
45°	27.0
47.5°	16.5
50°	10.5
52.5°	7.5
55°	6.0
57.5°	4.5
60°	3.0
62.5°	3.0
65°	1.5
67.5°	1.5
70°	1.5
72.5°	1.5
75°	1.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)