

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219870

Luminaire Tested: **MRZ-1-REC-X-3-L35-80-WFL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219870
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14881)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-3-L35-80-WFL-UNV-X-STD-HEX
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 3
Light Source: (1) 3500K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 569.2 lumens
Efficiency: N/A
Efficacy: 47.8 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.67
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 11.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219870

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-WFL-UNV-X-STD-HEX

Luminous Intensity Polar Plot

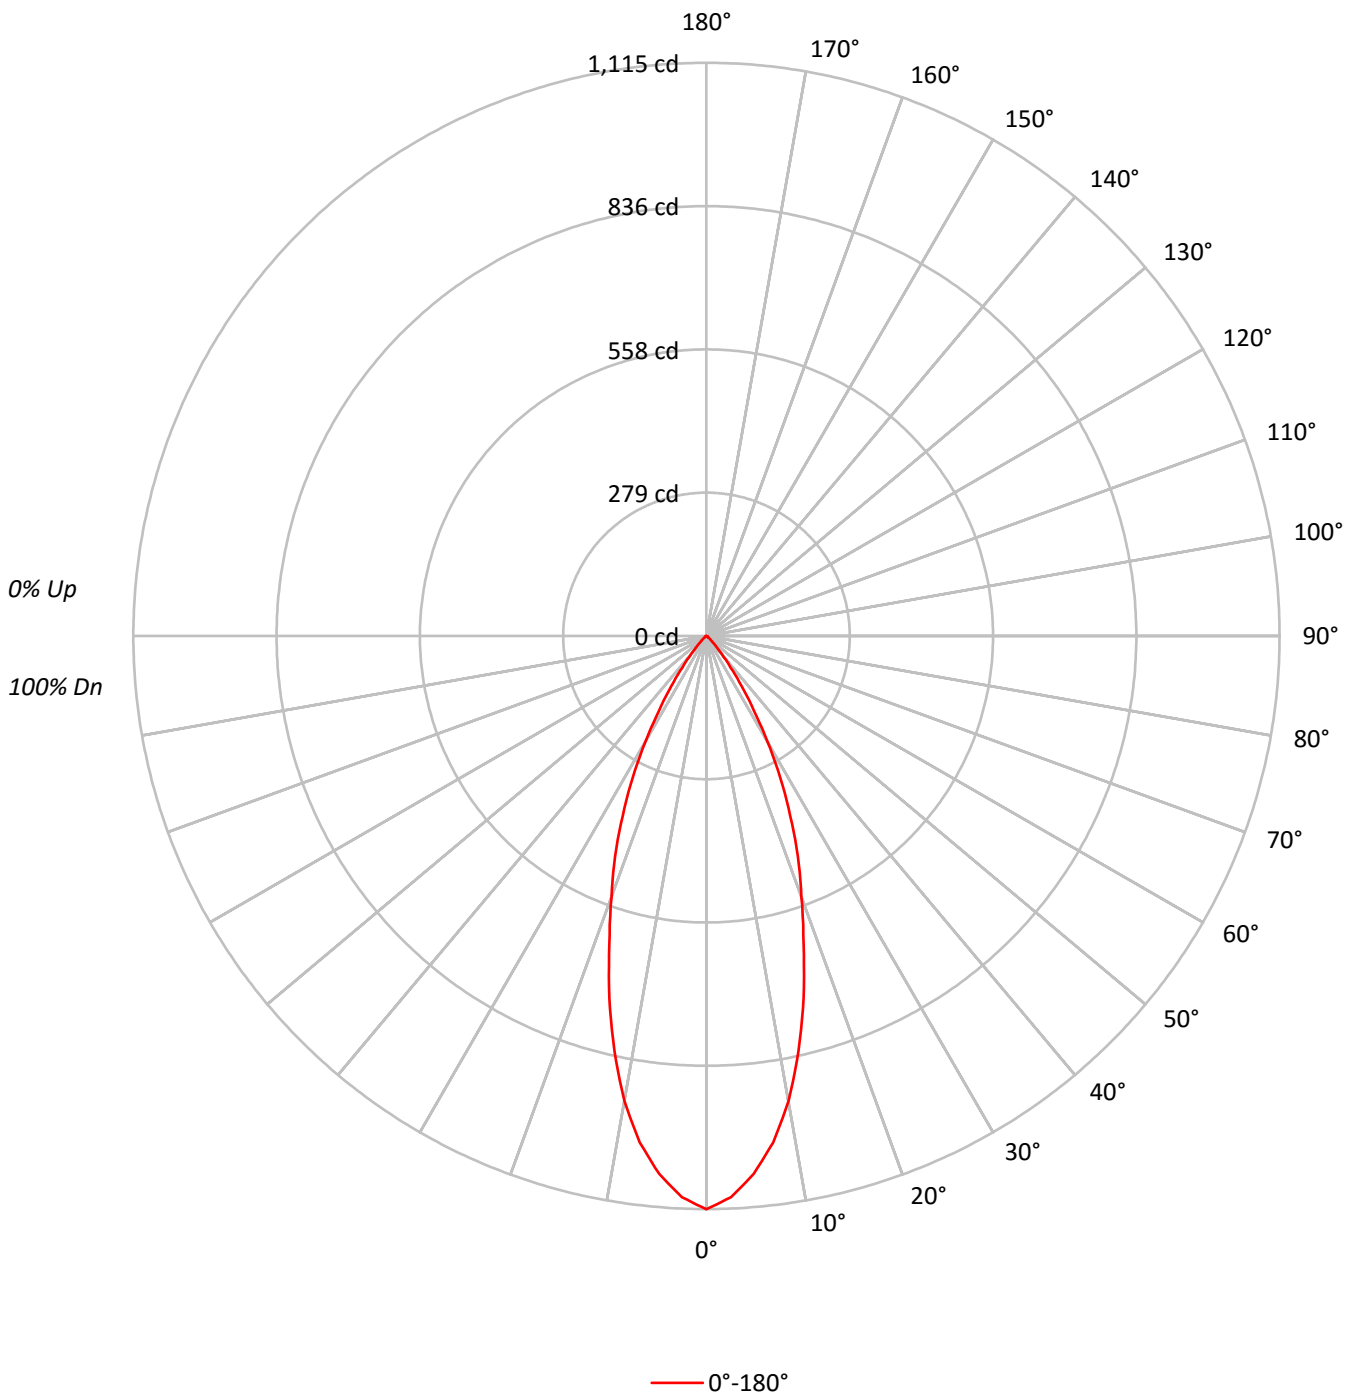



TEST NUMBER: P219870

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-WFL-UNV-X-STD-HEX

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89
3	104	99	94	91	103	97	93	90	95	91	89	92	90	87	90	88	86	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80
5	96	88	83	79	94	87	83	79	86	81	78	84	80	78	83	79	77	76
6	92	84	78	75	90	83	78	74	82	77	74	80	76	73	79	76	73	72
7	88	80	74	71	87	79	74	70	78	73	70	77	73	70	76	72	69	68
8	84	76	71	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65
9	81	72	67	64	80	72	67	63	71	66	63	70	66	63	69	66	63	62
10	78	69	64	61	77	69	64	60	68	63	60	67	63	60	67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	550266
5°	520424
10°	460260
15°	372617
20°	283734
25°	210023
30°	135134
35°	71433
40°	30915
45°	11513
50°	4605
55°	2581
60°	1480
65°	1751
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P219870

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-WFL-UNV-X-STD-HEX

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.2	16.9
10°-20°	200.9	35.3
20°-30°	175.1	30.8
30°-40°	77.6	13.6
40°-50°	15.3	2.7
50°-60°	3.2	0.6
60°-70°	0.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	472.2	83.0
0°-40°	549.8	96.6
0°-60°	568.3	99.8
0°-90°	569.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	569.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1115	
5°	1051	96
15°	730	201
25°	386	175
35°	119	78
45°	16	15
55°	3	3
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P219870

CATALOG NUMBER: MRZ-1-REC-X-3-L35-80-WFL-UNV-X-STD-HEX

CANDELA DISTRIBUTION (FULL):

0°	
0°	1115.3
2.5°	1092.8
5°	1050.8
7.5°	993.7
10°	918.7
12.5°	827.1
15°	729.5
17.5°	627.5
20°	540.4
22.5°	463.8
25°	385.8
27.5°	310.7
30°	237.2
32.5°	171.1
35°	118.6
37.5°	76.6
40°	48.0
42.5°	27.0
45°	16.5
47.5°	10.5
50°	6.0
52.5°	4.5
55°	3.0
57.5°	3.0
60°	1.5
62.5°	1.5
65°	1.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)