

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P219594

Luminaire Tested: **MRZ-1-REC-X-3-L35-97-NFL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P219594  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14871)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: MRZ-1-REC-X-3-L35-97-NFL-UNV-X-STD-HEX  
Description: MRZ INTEGRAL LED DOWNLIGHT  
25 DEGREE NARROW FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 3  
Light Source: (1) 3500K CCT, 97 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 692.2 lumens  
Efficiency: N/A  
Efficacy: 58.2 lumens/watt  
Spacing Criteria (0/90/45): 0.36 / 0.36 / 0.35  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 11.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219594

CATALOG NUMBER: MRZ-1-REC-X-3-L35-97-NFL-UNV-X-STD-HEX

### Luminous Intensity Polar Plot

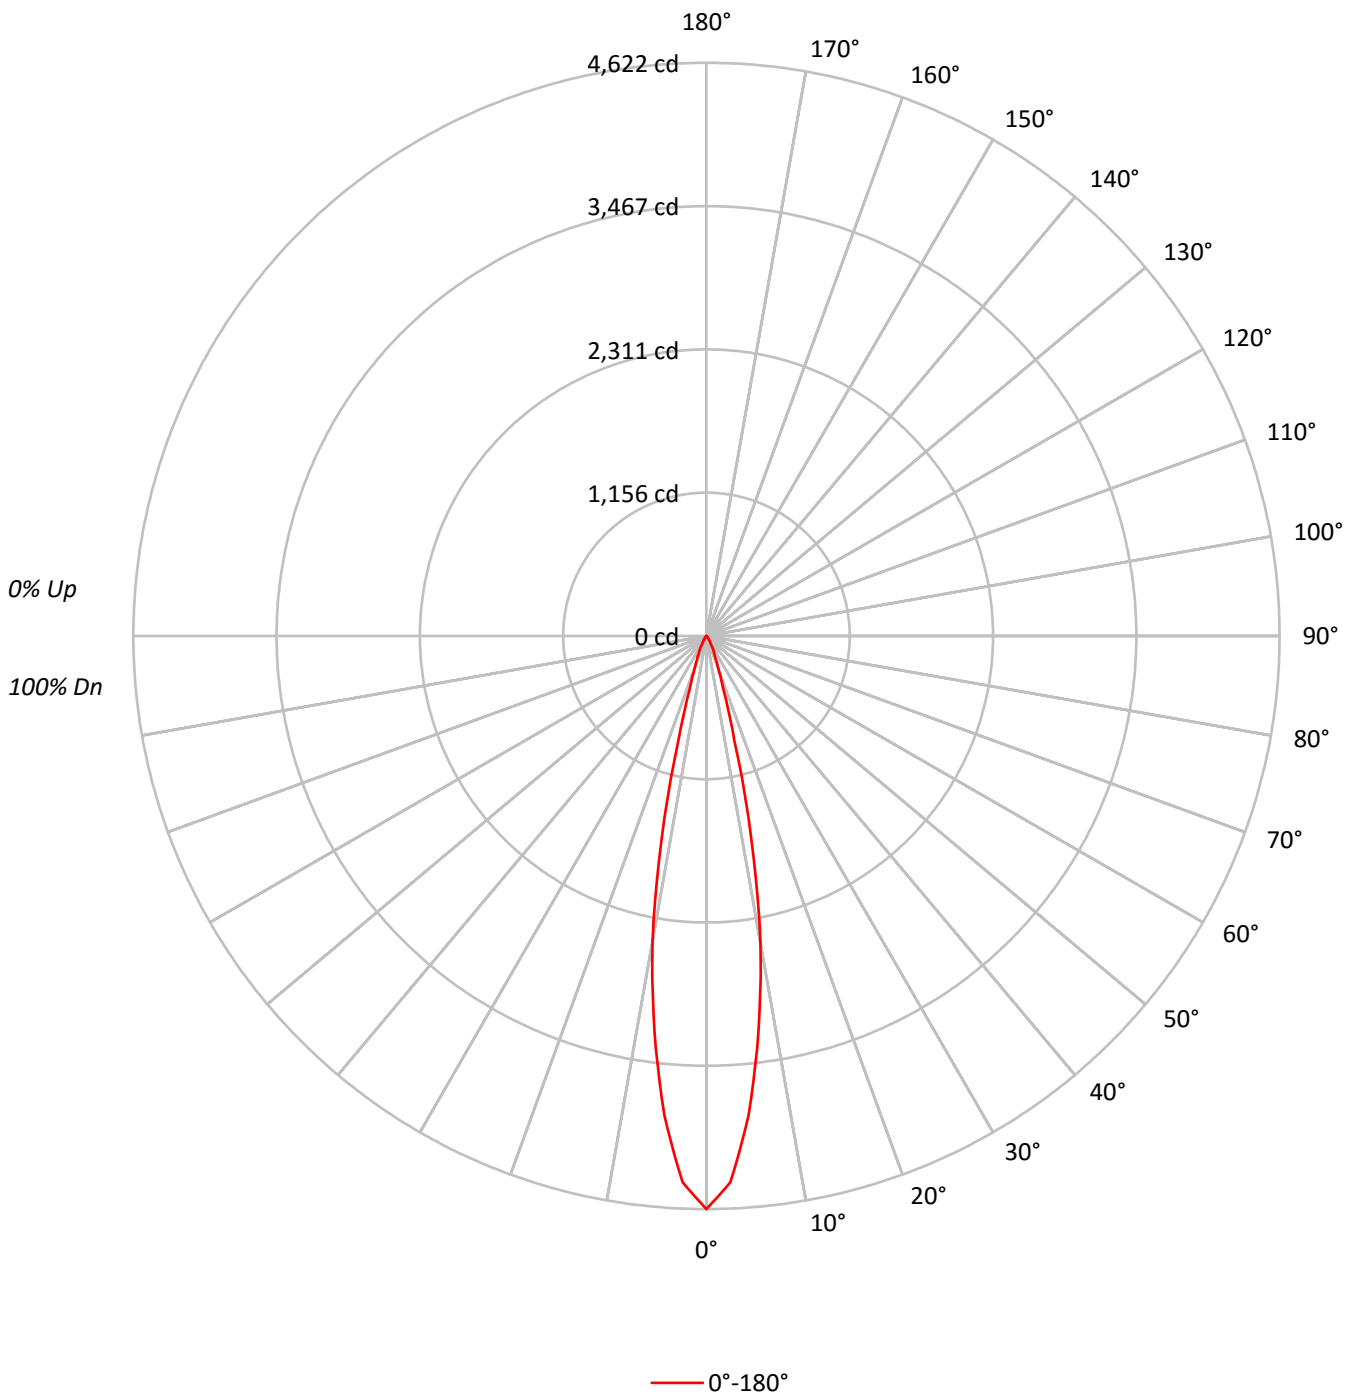



TEST NUMBER: P219594

CATALOG NUMBER: MRZ-1-REC-X-3-L35-97-NFL-UNV-X-STD-HEX

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95
3	109	105	101	99	107	103	100	98	101	99	97	99	97	95	97	95	94	92
4	106	101	98	95	105	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	92	102	97	94	91	96	93	91	94	92	90	93	91	89	88
6	101	95	92	89	100	95	91	89	93	90	88	92	90	88	91	89	87	86
7	99	93	89	87	98	92	89	86	91	88	86	90	88	86	89	87	85	84
8	96	91	87	84	95	90	87	84	89	86	84	88	86	84	88	85	83	82
9	94	88	85	82	94	88	85	82	87	84	82	87	84	82	86	83	82	81
10	92	87	83	81	92	86	83	81	86	82	80	85	82	80	84	82	80	79

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2280548
5°	1922566
10°	1256084
15°	443003
20°	142812
25°	74036
30°	34524
35°	15841
40°	7342
45°	3977
50°	1765
55°	946
60°	1085
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P219594

CATALOG NUMBER: MRZ-1-REC-X-3-L35-97-NFL-UNV-X-STD-HEX

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	326.5	47.2
10°-20°	276.3	39.9
20°-30°	64.9	9.4
30°-40°	18.2	2.6
40°-50°	4.5	0.7
50°-60°	1.4	0.2
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	667.7	96.5
0°-40°	685.9	99.1
0°-60°	691.8	99.9
0°-90°	692.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	692.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4622	
5°	3882	327
15°	867	276
25°	136	65
35°	26	18
45°	6	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P219594

CATALOG NUMBER: MRZ-1-REC-X-3-L35-97-NFL-UNV-X-STD-HEX

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4622.3
2.5°	4408.7
5°	3881.9
7.5°	3214.5
10°	2507.2
12.5°	1666.1
15°	867.3
17.5°	448.0
20°	272.0
22.5°	188.6
25°	136.0
27.5°	93.7
30°	60.6
32.5°	40.0
35°	26.3
37.5°	17.1
40°	11.4
42.5°	8.0
45°	5.7
47.5°	3.4
50°	2.3
52.5°	2.3
55°	1.1
57.5°	1.1
60°	1.1
62.5°	1.1
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)