

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219943

Luminaire Tested: **MRZ-1-REC-X-4-L35-97-WFL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219943
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14883)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-4-L35-97-WFL-UNV-X-STD-SFL
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 4
Light Source: (1) 3500K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1115.5 lumens
Efficiency: N/A
Efficacy: 70.6 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.9
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 15.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219943

CATALOG NUMBER: MRZ-1-REC-X-4-L35-97-WFL-UNV-X-STD-SFL

Luminous Intensity Polar Plot

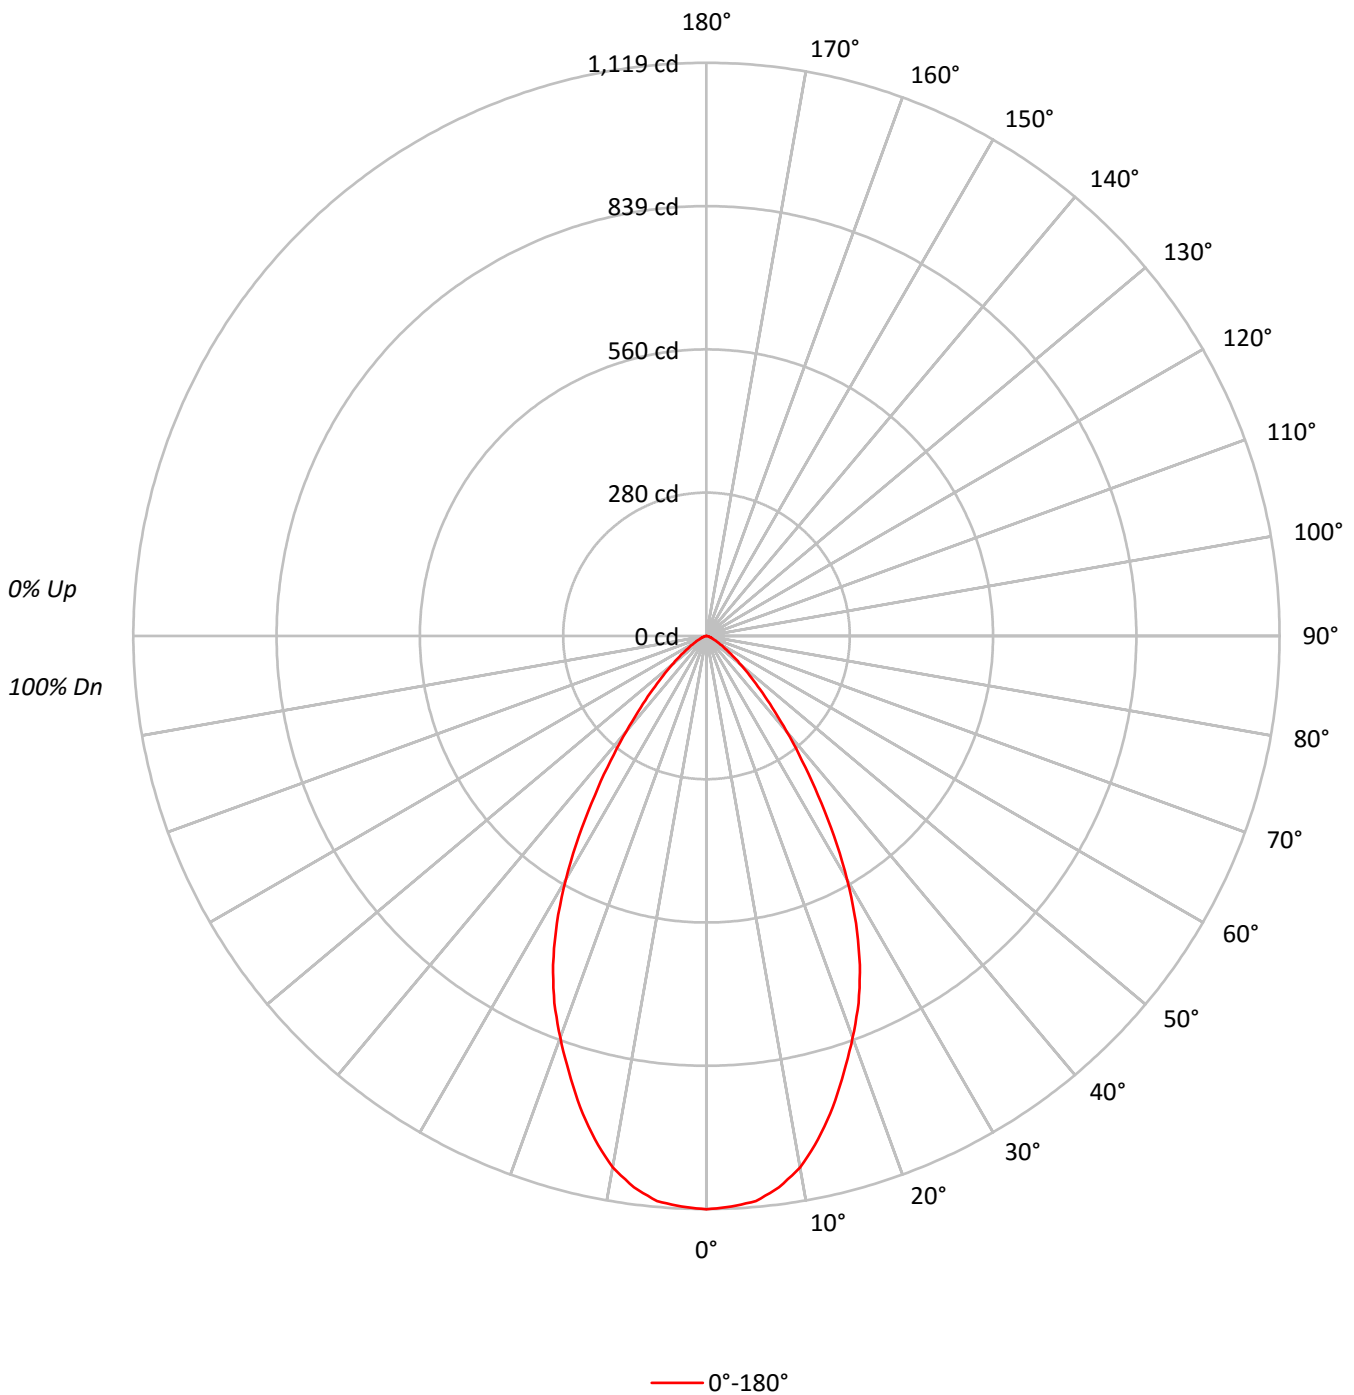



TEST NUMBER: P219943

CATALOG NUMBER: MRZ-1-REC-X-4-L35-97-WFL-UNV-X-STD-SFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	552289
5°	548654
10°	527894
15°	486675
20°	438149
25°	385859
30°	313053
35°	228876
40°	156249
45°	102987
50°	67315
55°	42751
60°	27432
65°	17045
70°	12694
75°	8388
80°	4262
85°	0



TEST NUMBER: P219943

CATALOG NUMBER: MRZ-1-REC-X-4-L35-97-WFL-UNV-X-STD-SFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.0	9.3
10°-20°	265.8	23.8
20°-30°	321.3	28.8
30°-40°	239.1	21.4
40°-50°	117.8	10.6
50°-60°	46.5	4.2
60°-70°	16.0	1.4
70°-80°	4.8	0.4
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	691.0	62.0
0°-40°	930.1	83.4
0°-60°	1094.4	98.1
0°-90°	1115.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1115.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1119	
5°	1108	104
15°	953	266
25°	709	321
35°	380	239
45°	148	118
55°	50	47
65°	15	16
75°	4	5
85°	0	0
90°	0	

TEST NUMBER: P219943

CATALOG NUMBER: MRZ-1-REC-X-4-L35-97-WFL-UNV-X-STD-SFL

CANDELA DISTRIBUTION (FULL):

0°	
0°	1119.4
2.5°	1115.1
5°	1107.8
7.5°	1085.8
10°	1053.7
12.5°	1006.9
15°	952.8
17.5°	892.9
20°	834.5
22.5°	776.0
25°	708.8
27.5°	632.8
30°	549.5
32.5°	463.3
35°	380.0
37.5°	306.9
40°	242.6
42.5°	190.0
45°	147.6
47.5°	114.0
50°	87.7
52.5°	65.8
55°	49.7
57.5°	36.5
60°	27.8
62.5°	20.5
65°	14.6
67.5°	11.7
70°	8.8
72.5°	5.8
75°	4.4
77.5°	2.9
80°	1.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)