

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P219816

Luminaire Tested: **MRZ-1-REC-X-4-L40-80-FL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P219816  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14878)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: MRZ-1-REC-X-4-L40-80-FL-UNV-X-STD-SFL  
Description: MRZ INTEGRAL LED DOWNLIGHT  
40 DEGREE FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 4  
Light Source: (1) 4000K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1619.5 lumens  
Efficiency: N/A  
Efficacy: 102.5 lumens/watt  
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.66  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 15.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219816

CATALOG NUMBER: MRZ-1-REC-X-4-L40-80-FL-UNV-X-STD-SFL

### Luminous Intensity Polar Plot

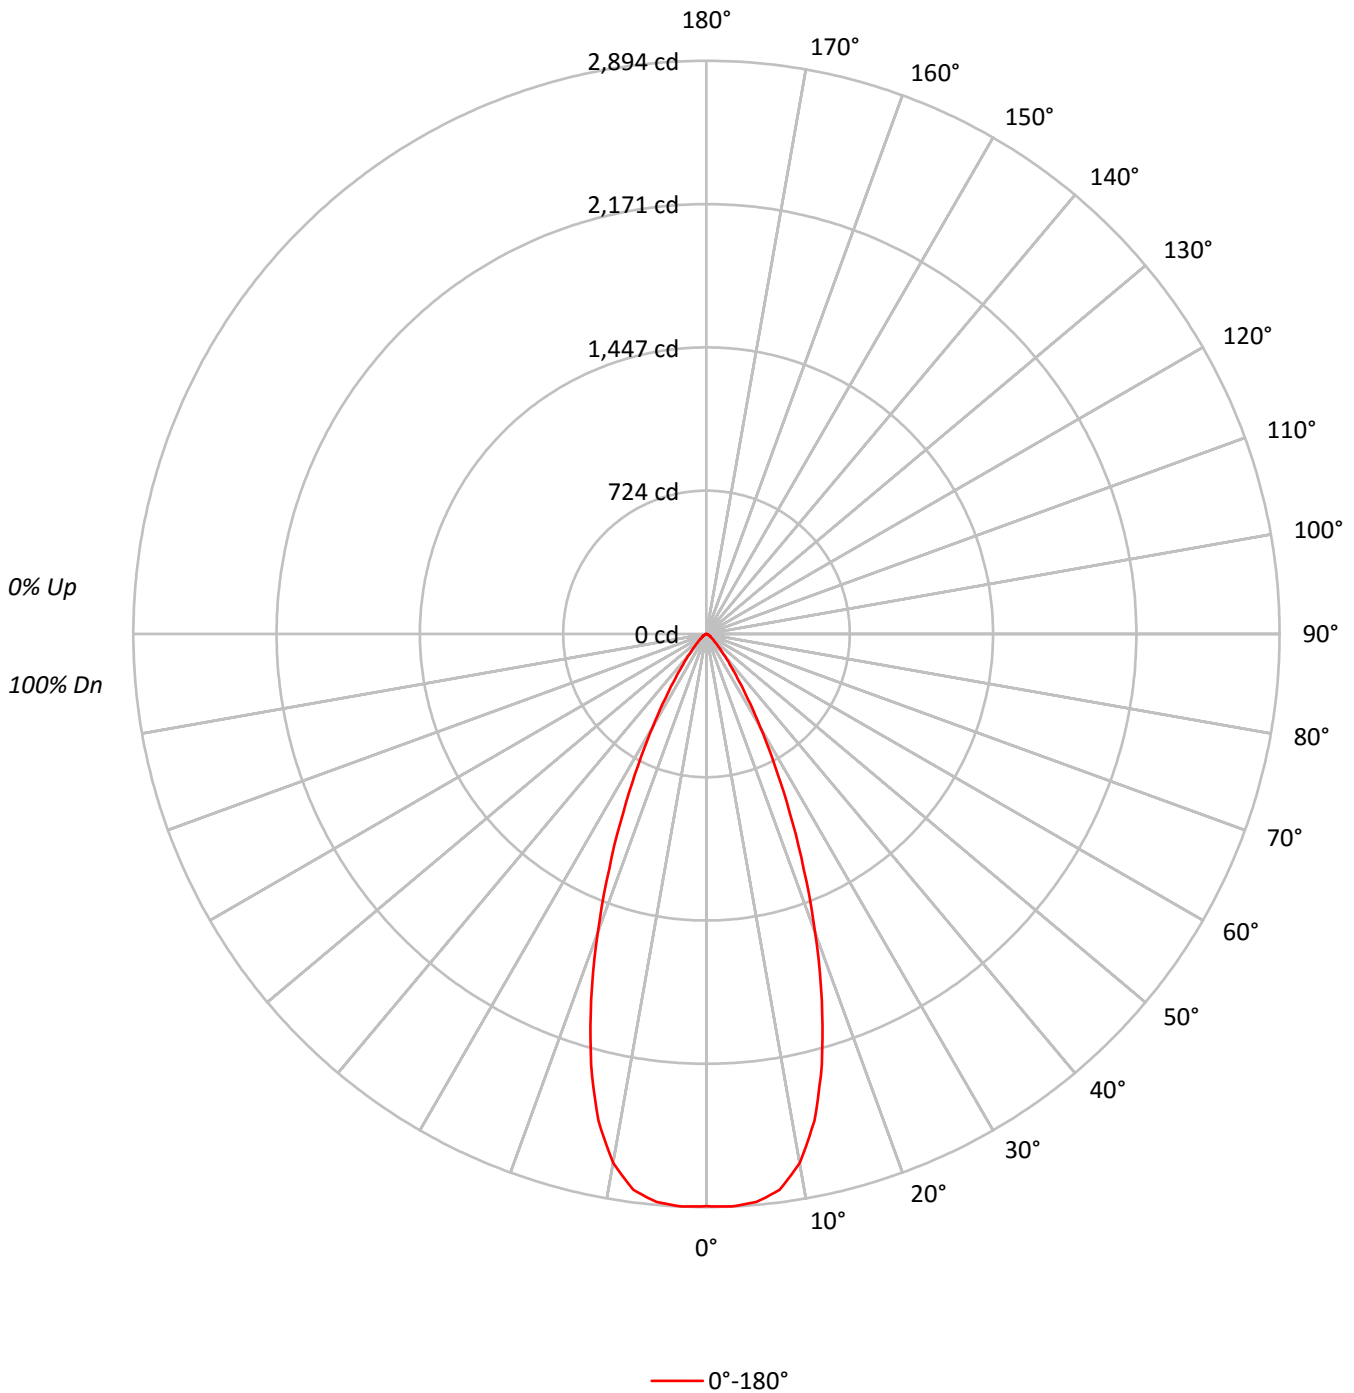



TEST NUMBER: P219816

CATALOG NUMBER: MRZ-1-REC-X-4-L40-80-FL-UNV-X-STD-SFL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	94
2	109	105	101	98	107	103	99	97	100	97	95	97	94	93	94	92	91	89
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	88	85	84
4	100	93	88	84	98	92	87	84	90	86	83	88	84	82	86	83	81	79
5	95	88	83	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75
6	91	83	78	74	90	83	78	74	81	77	73	80	76	73	79	75	73	71
7	88	79	74	70	86	79	74	70	77	73	70	76	72	69	75	72	69	68
8	84	76	70	67	83	75	70	66	74	69	66	73	69	66	72	68	66	64
9	81	72	67	63	80	72	67	63	71	66	63	70	66	63	69	65	63	61
10	78	69	64	60	77	69	64	60	68	63	60	67	63	60	66	63	60	59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1425670
5°	1426311
10°	1358887
15°	1149724
20°	842432
25°	540628
30°	308382
35°	164188
40°	87786
45°	50238
50°	31393
55°	21763
60°	15393
65°	11324
70°	8367
75°	7434
80°	5398
85°	0



TEST NUMBER: P219816

CATALOG NUMBER: MRZ-1-REC-X-4-L40-80-FL-UNV-X-STD-SFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	269.9	16.7
10°-20°	611.9	37.8
20°-30°	459.1	28.4
30°-40°	182.3	11.3
40°-50°	59.5	3.7
50°-60°	23.2	1.4
60°-70°	9.8	0.6
70°-80°	3.6	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1340.9	82.8
0°-40°	1523.2	94.1
0°-60°	1605.8	99.2
0°-90°	1619.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1619.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2890	
5°	2880	270
15°	2251	612
25°	993	459
35°	273	182
45°	72	60
55°	25	23
65°	10	10
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P219816

CATALOG NUMBER: MRZ-1-REC-X-4-L40-80-FL-UNV-X-STD-SFL

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2889.6
2.5°	2893.5
5°	2879.9
7.5°	2831.2
10°	2712.4
12.5°	2517.7
15°	2250.9
17.5°	1937.5
20°	1604.5
22.5°	1283.2
25°	993.1
27.5°	743.8
30°	541.3
32.5°	387.5
35°	272.6
37.5°	192.8
40°	136.3
42.5°	99.3
45°	72.0
47.5°	52.6
50°	40.9
52.5°	31.2
55°	25.3
57.5°	19.5
60°	15.6
62.5°	11.7
65°	9.7
67.5°	7.8
70°	5.8
72.5°	3.9
75°	3.9
77.5°	1.9
80°	1.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)