

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219828

Luminaire Tested: **MRZ-1-REC-X-1H-L40-97-WFL-UNV-X-STD**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219828
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14880)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1H-L40-97-WFL-UNV-X-STD
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC, LIGHT LEVEL 1
Light Source: (1) 4000K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 519.0 lumens
Efficiency: N/A
Efficacy: 76.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.91
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 6.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219828

CATALOG NUMBER: MRZ-1-REC-X-1H-L40-97-WFL-UNV-X-STD

Luminous Intensity Polar Plot

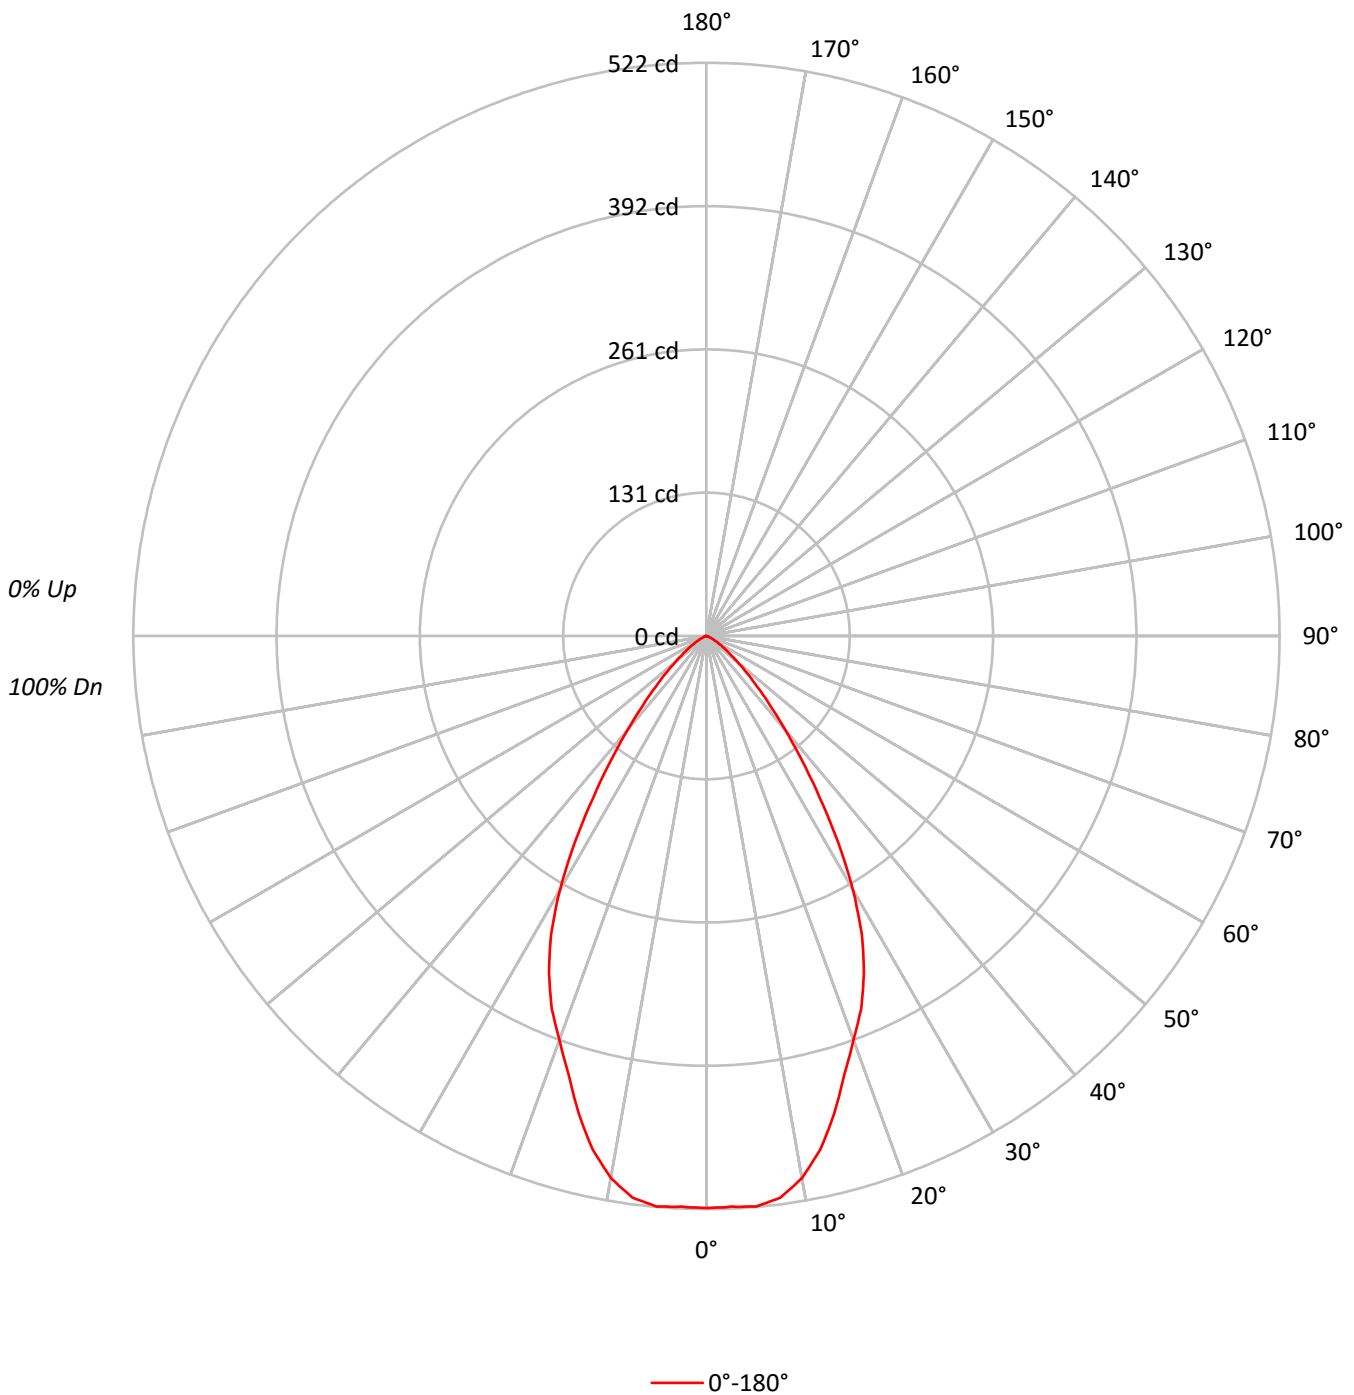



TEST NUMBER: P219828

CATALOG NUMBER: MRZ-1-REC-X-1H-L40-97-WFL-UNV-X-STD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	82	80	78
4	95	87	81	77	94	86	81	76	84	79	76	82	78	75	80	77	74	72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	67
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62
7	81	71	64	60	79	70	64	60	69	63	59	68	63	59	66	62	59	57
8	76	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53
9	73	62	56	52	71	62	56	52	61	55	52	60	55	51	59	55	51	50
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	257051
5°	258330
10°	251147
15°	229751
20°	205502
25°	184710
30°	151997
35°	108294
40°	71620
45°	45632
50°	28246
55°	17462
60°	10065
65°	5137
70°	2741
75°	2478
80°	0
85°	0



TEST NUMBER: P219828

CATALOG NUMBER: MRZ-1-REC-X-1H-L40-97-WFL-UNV-X-STD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.1	9.5
10°-20°	125.4	24.2
20°-30°	153.7	29.6
30°-40°	113.4	21.8
40°-50°	52.4	10.1
50°-60°	19.0	3.7
60°-70°	4.9	0.9
70°-80°	1.1	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	328.2	63.2
0°-40°	441.6	85.1
0°-60°	513.0	98.8
0°-90°	519.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	519.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	521	
5°	522	49
15°	450	125
25°	339	154
35°	180	113
45°	65	52
55°	20	19
65°	4	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P219828

CATALOG NUMBER: MRZ-1-REC-X-1H-L40-97-WFL-UNV-X-STD

CANDELA DISTRIBUTION (FULL):

0°	
0°	521.0
2.5°	520.3
5°	521.6
7.5°	515.9
10°	501.3
12.5°	479.0
15°	449.8
17.5°	418.0
20°	391.4
22.5°	367.9
25°	339.3
27.5°	306.2
30°	266.8
32.5°	223.0
35°	179.8
37.5°	142.3
40°	111.2
42.5°	85.8
45°	65.4
47.5°	49.6
50°	36.8
52.5°	27.3
55°	20.3
57.5°	14.6
60°	10.2
62.5°	7.0
65°	4.4
67.5°	2.5
70°	1.9
72.5°	1.3
75°	1.3
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)