

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P701863

Luminaire Tested: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P701863
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-8)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC
Description: FARALLON 4" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA
Light Source: 2400K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 655.2 lumens
Efficiency: N/A
Efficacy: 66.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.83
Luminous Opening: Circular (Dia: 0.34' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P701863

CATALOG NUMBER: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC

Luminous Intensity Polar Plot

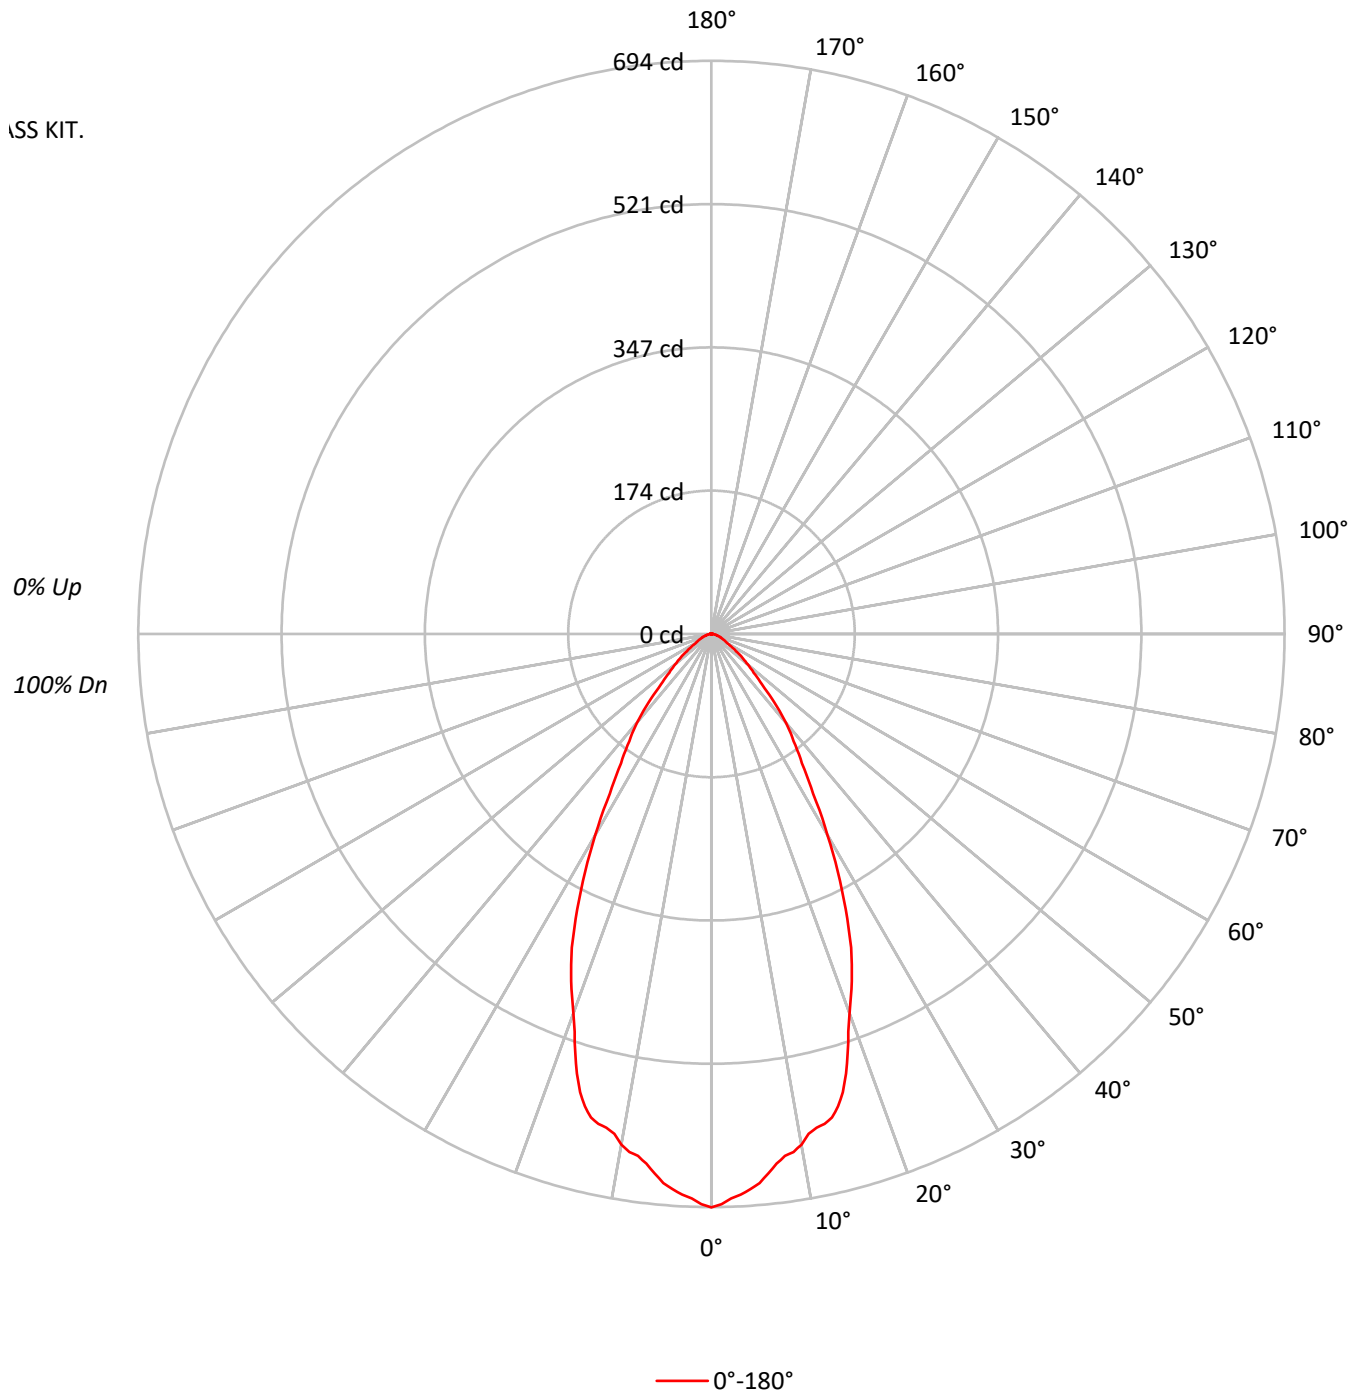

TEST NUMBER: P701863

CATALOG NUMBER: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	94	93	91
2	106	101	96	92	104	99	95	91	95	92	89		92	89	87		89	87	85	83
3	100	93	87	83	98	91	86	82	88	84	80		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	72	70
5	89	80	73	68	87	79	72	68	77	71	67		75	70	67		73	69	66	64
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69	65	61	60
7	79	69	63	58	78	69	62	58	67	62	58		66	61	57		65	60	57	55
8	75	65	58	54	74	64	58	54	63	58	54		62	57	53		61	56	53	52
9	71	61	55	50	70	61	54	50	60	54	50		59	53	50		58	53	50	48
10	68	58	51	47	67	57	51	47	56	51	47		55	50	47		55	50	47	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80539
5°	77703
10°	73949
15°	71120
20°	60343
25°	50332
30°	37673
35°	27058
40°	21348
45°	14155
50°	10339
55°	7320
60°	5034
65°	4336
70°	3798
75°	3226
80°	2672
85°	2662

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14155 cd/sqm

TEST NUMBER: P701863

CATALOG NUMBER: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.2	9.5
10°-20°	161.5	24.6
20°-30°	177.6	27.1
30°-40°	123.2	18.8
40°-50°	70.2	10.7
50°-60°	33.4	5.1
60°-70°	15.8	2.4
70°-80°	7.7	1.2
80°-90°	2.2	0.3
90°-100°	0.8	0.1
100°-110°	0.5	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	401.3	61.2
0°-40°	524.5	80.0
0°-60°	628.1	95.9
0°-90°	653.8	99.8
90°-120°	1.4	0.2
90°-150°	1.4	0.2
90°-180°	1.0	0.2
0°-180°	655.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	694	
5°	667	62
15°	592	161
25°	393	178
35°	191	123
45°	86	70
55°	36	33
65°	16	16
75°	7	8
85°	2	2
90°	1	0
95°	1	1
105°	1	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	

TEST NUMBER: P701863

CATALOG NUMBER: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	694.4
1°	690.5
2°	683.9
3°	679.9
4°	674.0
5°	667.4
6°	656.9
7°	646.3
8°	638.4
9°	635.1
10°	627.9
11°	616.7
12°	611.4
13°	608.8
14°	603.5
15°	592.3
16°	577.1
17°	556.7
18°	533.7
19°	509.3
20°	488.9
21°	471.1
22°	453.3
23°	434.8
24°	415.7
25°	393.3
27.5°	336.7
30°	281.3
32.5°	229.3
35°	191.1
37.5°	163.4
40°	141.0
42.5°	112.7
45°	86.3
47.5°	69.2
50°	57.3
52.5°	46.8
55°	36.2
57.5°	27.7
60°	21.7
62.5°	18.4
65°	15.8
67.5°	13.2
70°	11.2
72.5°	9.2

TEST NUMBER: P701863

CATALOG NUMBER: 340-4C-10-D010 / 340-EU4C-1020-9024-4LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
75°	7.2
77.5°	5.3
80°	4.0
82.5°	2.6
85°	2.0
87.5°	1.3
90°	0.7
92.5°	0.7
95°	0.7
97.5°	0.7
100°	1.3
102.5°	0.7
105°	0.7
107.5°	0.0
110°	0.0
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)