

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P701992

Luminaire Tested: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P701992
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-3)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC
Description: FARALLON 4" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1416.0 lumens
Efficiency: N/A
Efficacy: 65.0 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.64
Luminous Opening: Circular (Dia: 0.34' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P701992

CATALOG NUMBER: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC

Luminous Intensity Polar Plot

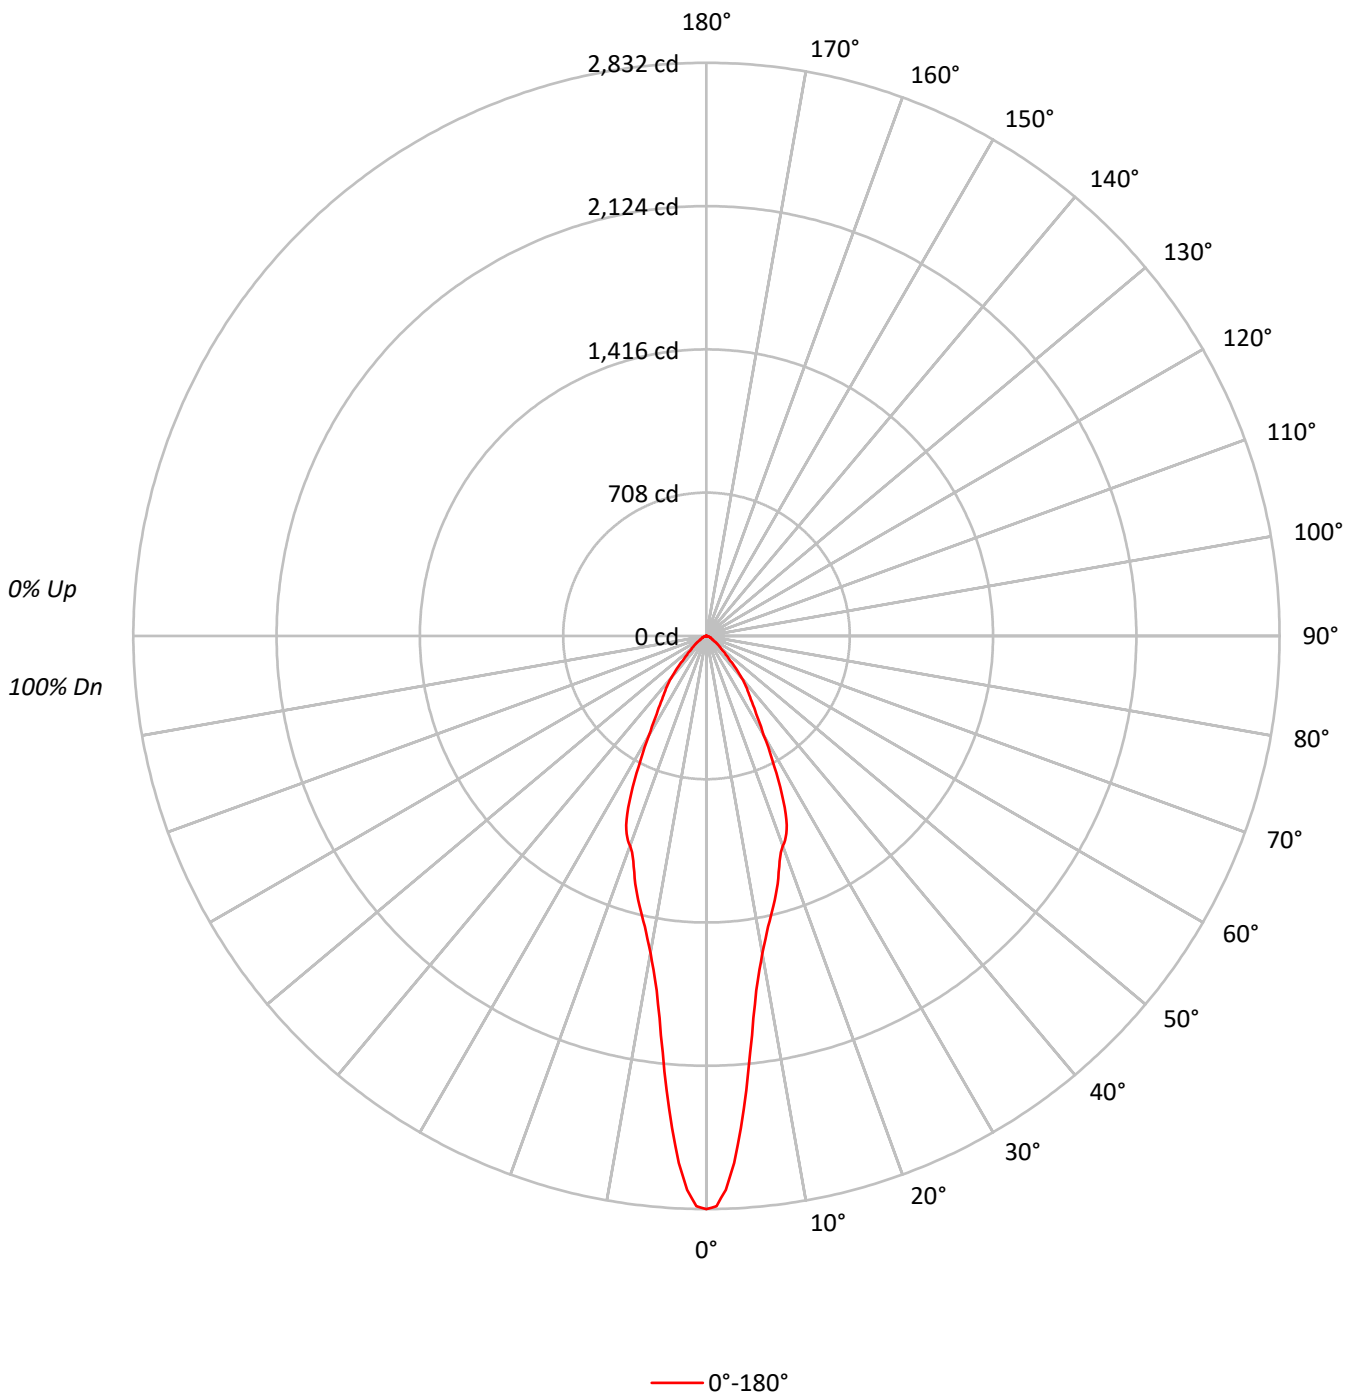

TEST NUMBER: P701992

CATALOG NUMBER: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	95	89	85	99	93	88	85	91	87	83		88	85	82		86	83	81	79
4	96	88	82	78	94	87	82	78	85	80	77		83	79	76		81	78	75	73
5	91	82	76	72	89	82	76	72	80	75	71		78	74	70		76	73	70	68
6	87	77	71	67	85	77	71	67	75	70	66		74	69	66		72	68	65	64
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68	64	61	60
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65	61	57	56
9	75	65	59	55	74	64	59	55	63	58	55		63	58	54		62	57	54	53
10	71	62	56	52	70	61	55	52	60	55	52		59	55	51		59	54	51	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	328464
5°	262355
10°	187517
15°	158979
20°	136275
25°	115355
30°	75815
35°	54101
40°	41318
45°	24292
50°	16041
55°	11668
60°	7585
65°	6861
70°	5833
75°	4212
80°	3139
85°	2129

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24292 cd/sqm

TEST NUMBER: P701992

CATALOG NUMBER: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	191.6	13.5
10°-20°	368.2	26.0
20°-30°	397.7	28.1
30°-40°	245.7	17.3
40°-50°	123.0	8.7
50°-60°	51.6	3.6
60°-70°	24.3	1.7
70°-80°	10.7	0.8
80°-90°	2.4	0.2
90°-100°	0.2	0.0
100°-110°	0.6	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	957.5	67.6
0°-40°	1203.1	85.0
0°-60°	1377.8	97.3
0°-90°	1415.1	99.9
90°-120°	0.9	0.1
90°-150°	0.9	0.1
90°-180°	1.0	0.1
0°-180°	1416.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2832	
5°	2253	192
15°	1324	368
25°	901	398
35°	382	246
45°	148	123
55°	58	52
65°	25	24
75°	9	11
85°	2	2
90°	0	0
95°	0	1
105°	0	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P701992

CATALOG NUMBER: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2832.0
1°	2818.0
2°	2738.4
3°	2607.4
4°	2437.4
5°	2253.4
6°	2069.4
7°	1902.5
8°	1770.0
9°	1670.2
10°	1592.2
11°	1525.2
12°	1467.5
13°	1417.6
14°	1372.3
15°	1324.0
16°	1275.6
17°	1221.1
18°	1171.2
19°	1130.6
20°	1104.1
21°	1082.3
22°	1054.2
23°	1015.2
24°	962.2
25°	901.4
27.5°	725.2
30°	566.1
32.5°	456.9
35°	382.1
37.5°	327.5
40°	272.9
42.5°	204.3
45°	148.1
47.5°	112.3
50°	88.9
52.5°	73.3
55°	57.7
57.5°	40.5
60°	32.7
62.5°	28.1
65°	25.0
67.5°	20.3
70°	17.2
72.5°	12.5

TEST NUMBER: P701992

CATALOG NUMBER: 340-4C-20-D010 / 340-EU4C-1020-9035-4LBW1LI-CC

CANDELA DISTRIBUTION (continued):

	0°
75°	9.4
77.5°	7.8
80°	4.7
82.5°	3.1
85°	1.6
87.5°	1.6
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	1.6
102.5°	1.6
105°	0.0
107.5°	0.0
110°	0.0
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)