

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702027

Luminaire Tested: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702027
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-3)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC
Description: FARALLON 4" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.
Light Source: 2400K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1485.7 lumens
Efficiency: N/A
Efficacy: 47.2 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.64
Luminous Opening: Circular (Dia: 0.34' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702027

CATALOG NUMBER: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC

Luminous Intensity Polar Plot

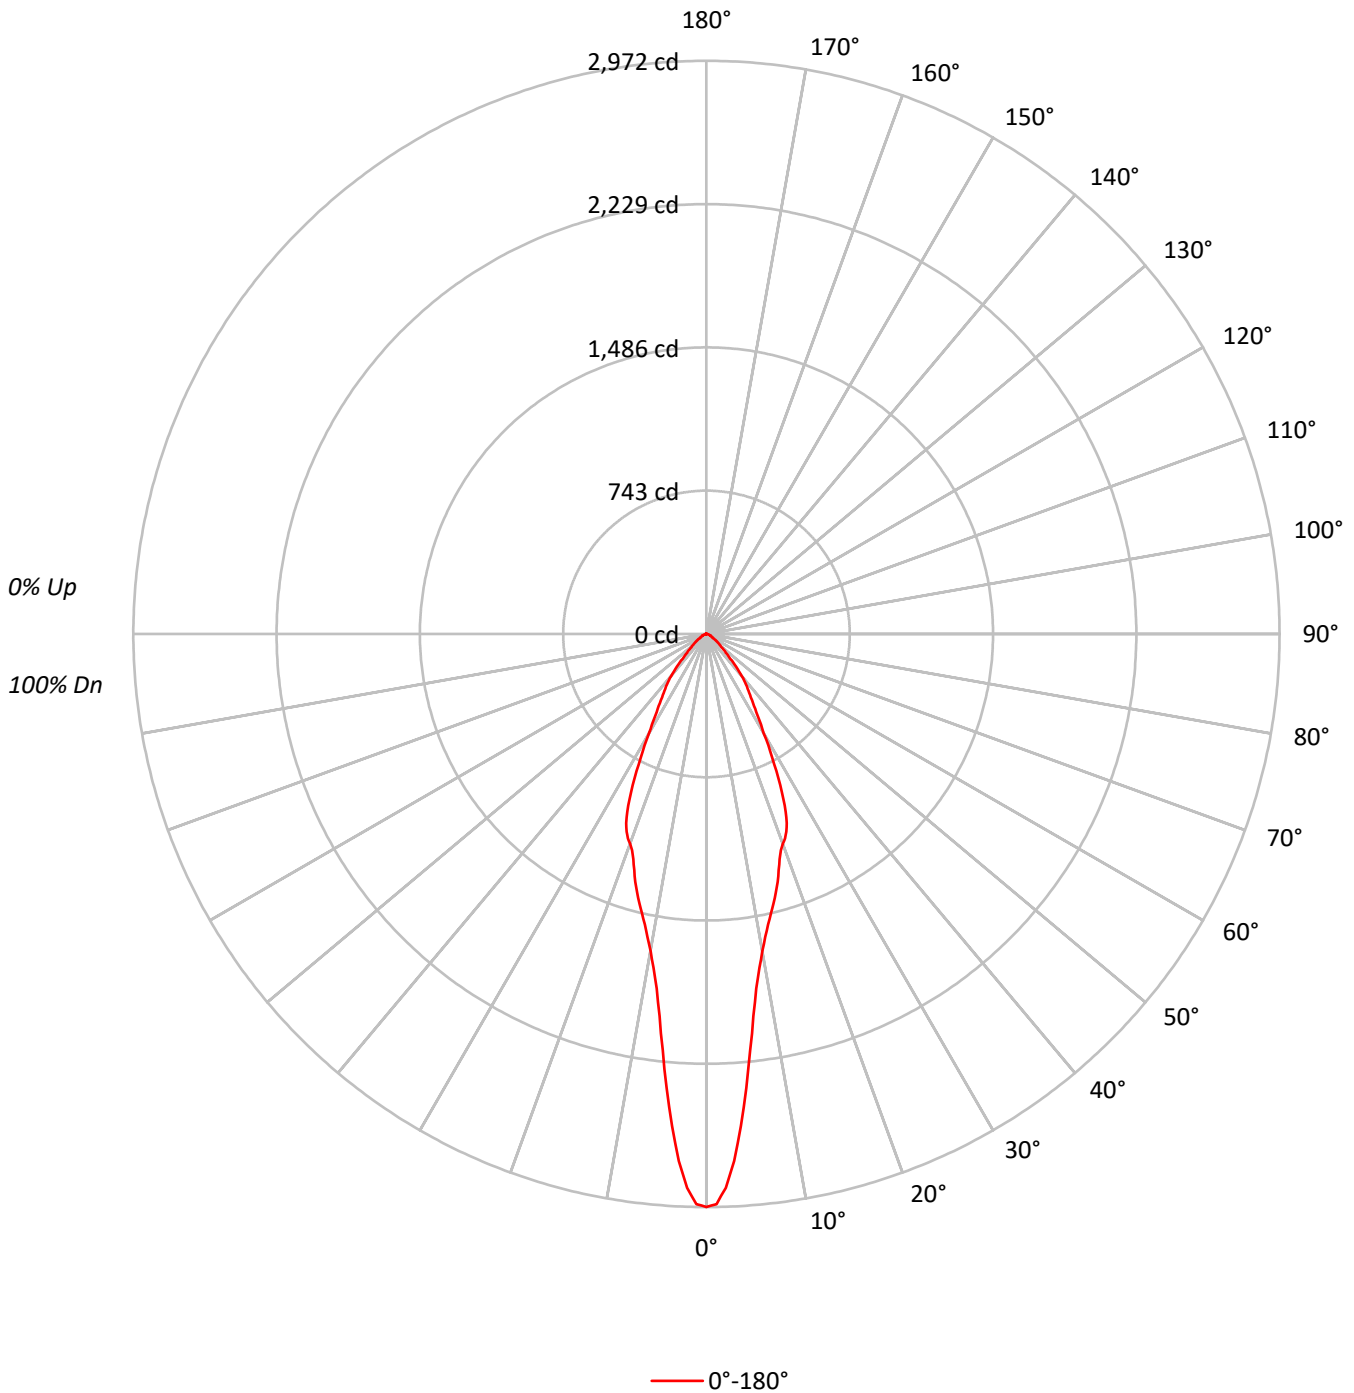

TEST NUMBER: P702027

CATALOG NUMBER: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	95	89	85	99	93	88	85	91	87	83		88	85	82		86	83	81	79
4	96	88	82	78	94	87	82	78	85	80	77		83	79	76		81	78	75	73
5	91	82	76	72	89	82	76	72	80	75	71		78	74	70		76	73	70	68
6	87	77	71	67	85	77	71	67	75	70	66		74	69	66		72	68	65	64
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68	64	61	60
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65	61	57	56
9	75	65	59	55	74	64	59	55	63	58	55		63	58	54		62	57	54	53
10	71	62	56	52	70	61	55	52	60	55	52		59	55	51		59	54	51	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	344656
5°	275290
10°	196762
15°	166820
20°	142990
25°	121037
30°	79552
35°	56763
40°	43362
45°	25506
50°	16835
55°	12234
60°	7980
65°	7190
70°	6104
75°	4392
80°	3273
85°	2129

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25506 cd/sqm

TEST NUMBER: P702027

CATALOG NUMBER: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	201.0	13.5
10°-20°	386.3	26.0
20°-30°	417.3	28.1
30°-40°	257.8	17.3
40°-50°	129.1	8.7
50°-60°	54.1	3.6
60°-70°	25.5	1.7
70°-80°	11.2	0.8
80°-90°	2.4	0.2
90°-100°	0.2	0.0
100°-110°	0.6	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1004.7	67.6
0°-40°	1262.4	85.0
0°-60°	1445.7	97.3
0°-90°	1484.8	99.9
90°-120°	0.9	0.1
90°-150°	0.9	0.1
90°-180°	1.0	0.1
0°-180°	1485.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2972	
5°	2364	201
15°	1389	386
25°	946	417
35°	401	258
45°	156	129
55°	60	54
65°	26	26
75°	10	11
85°	2	2
90°	0	0
95°	0	1
105°	0	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	

TEST NUMBER: P702027

CATALOG NUMBER: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2971.6
1°	2956.9
2°	2873.4
3°	2736.0
4°	2557.6
5°	2364.5
6°	2171.4
7°	1996.4
8°	1857.3
9°	1752.5
10°	1670.7
11°	1600.4
12°	1539.8
13°	1487.4
14°	1440.0
15°	1389.3
16°	1338.5
17°	1281.3
18°	1228.9
19°	1186.4
20°	1158.5
21°	1135.6
22°	1106.2
23°	1065.3
24°	1009.6
25°	945.8
27.5°	760.9
30°	594.0
32.5°	479.5
35°	400.9
37.5°	343.6
40°	286.4
42.5°	214.4
45°	155.5
47.5°	117.8
50°	93.3
52.5°	76.9
55°	60.5
57.5°	42.5
60°	34.4
62.5°	29.5
65°	26.2
67.5°	21.3
70°	18.0
72.5°	13.1

TEST NUMBER: P702027

CATALOG NUMBER: 340-4C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-CC

CANDELA DISTRIBUTION (continued):

	0°
75°	9.8
77.5°	8.2
80°	4.9
82.5°	3.3
85°	1.6
87.5°	1.6
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	1.6
102.5°	1.6
105°	0.0
107.5°	0.0
110°	0.0
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)