

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702143

Luminaire Tested: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702143
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-8)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC
Description: FARALLON 4" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA
Light Source: 2400K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2254.5 lumens
Efficiency: N/A
Efficacy: 55.8 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.83
Luminous Opening: Circular (Dia: 0.34' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702143

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC

Luminous Intensity Polar Plot

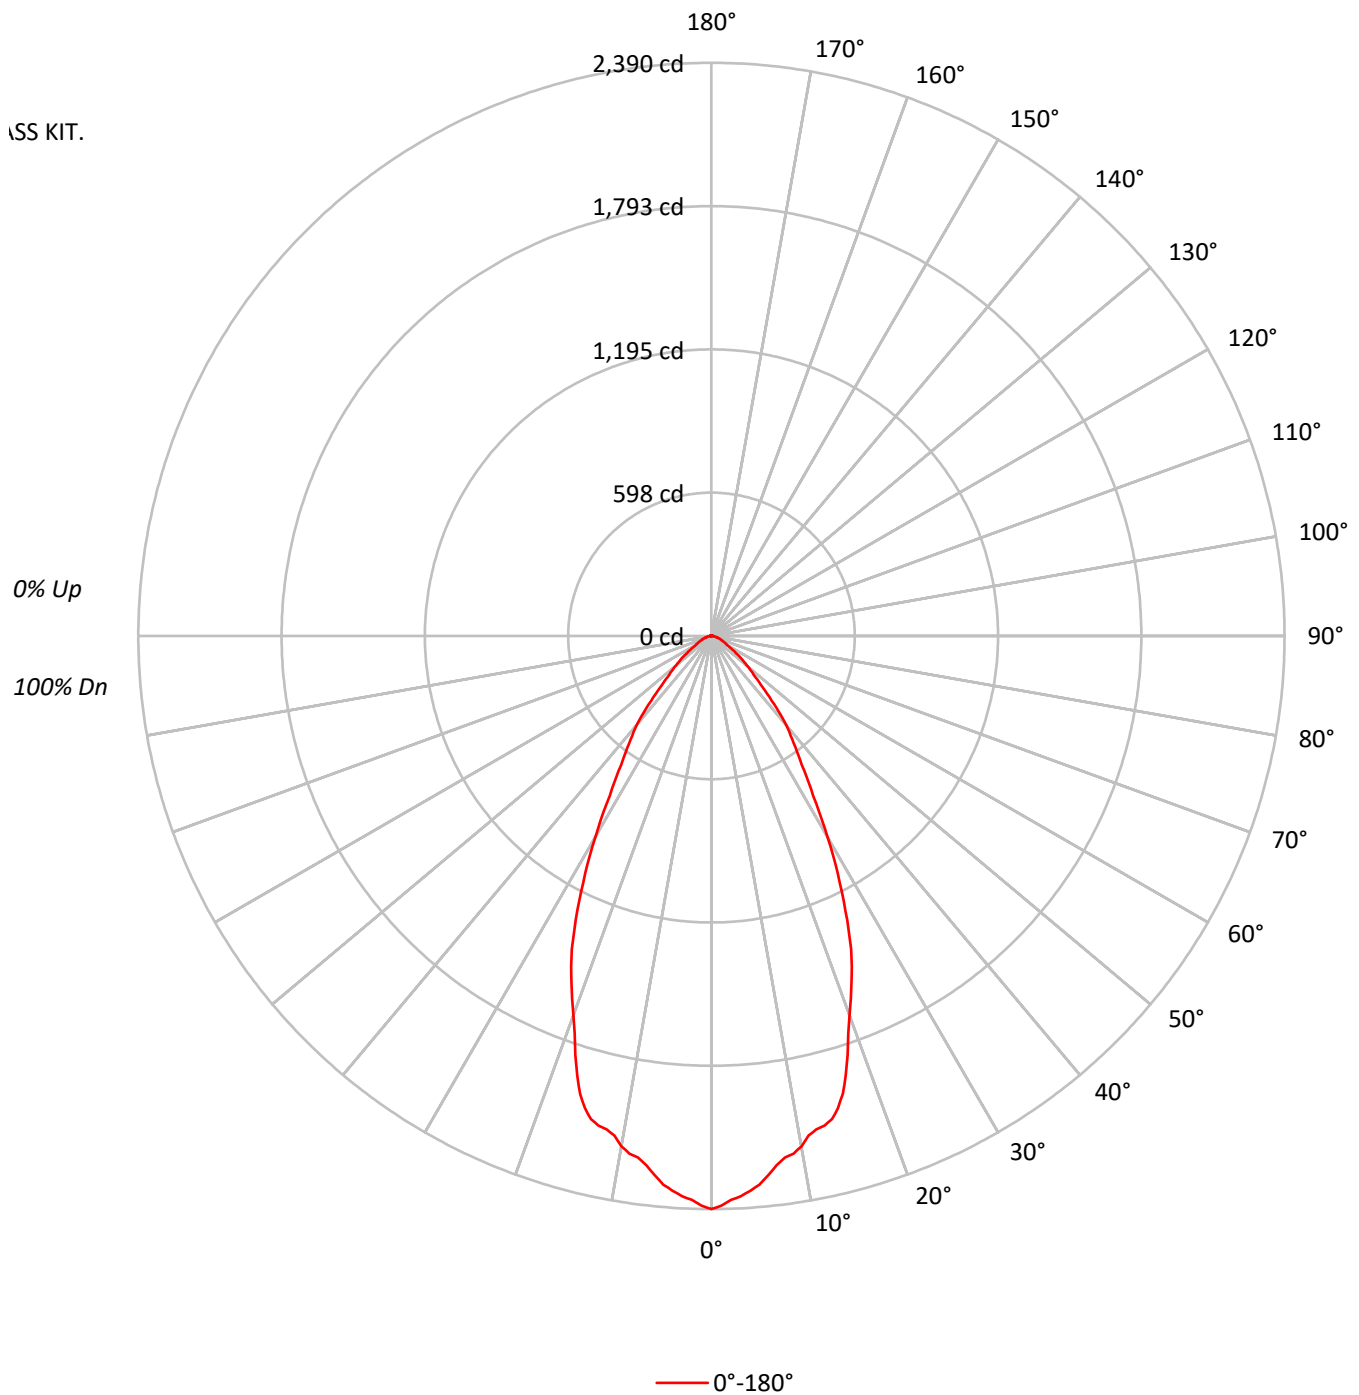

TEST NUMBER: P702143

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	94	93	91
2	106	101	96	92	104	99	95	91	95	92	89		92	89	87		89	87	85	83
3	100	93	87	83	98	91	86	82	88	84	80		86	82	79		84	81	78	76
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78	75	72	70
5	89	80	73	68	87	79	72	68	77	71	67		75	70	67		73	69	66	64
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69	65	61	60
7	79	69	63	58	78	69	62	58	67	62	58		66	61	57		65	60	57	55
8	75	65	58	54	74	64	58	54	63	58	54		62	57	53		61	56	53	52
9	71	61	55	50	70	61	54	50	60	54	50		59	53	50		58	53	50	48
10	68	58	51	47	67	57	51	47	56	51	47		55	50	47		55	50	47	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	277165
5°	267396
10°	254471
15°	244748
20°	207641
25°	173212
30°	129654
35°	93095
40°	73462
45°	48715
50°	35600
55°	25216
60°	17351
65°	14930
70°	13056
75°	11158
80°	9084
85°	9049

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 48715 cd/sqm

TEST NUMBER: P702143

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.0	9.5
10°-20°	555.6	24.6
20°-30°	611.3	27.1
30°-40°	423.8	18.8
40°-50°	241.6	10.7
50°-60°	114.9	5.1
60°-70°	54.3	2.4
70°-80°	26.5	1.2
80°-90°	7.7	0.3
90°-100°	2.8	0.1
100°-110°	1.8	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1380.9	61.3
0°-40°	1804.8	80.1
0°-60°	2161.3	95.9
0°-90°	2249.8	99.8
90°-120°	4.6	0.2
90°-150°	4.6	0.2
90°-180°	5.0	0.2
0°-180°	2254.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2390	
5°	2297	214
15°	2038	556
25°	1354	611
35°	658	424
45°	297	242
55°	125	115
65°	54	54
75°	25	27
85°	7	7
90°	2	2
95°	2	2
105°	2	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702143

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2389.7
1°	2376.1
2°	2353.4
3°	2339.8
4°	2319.4
5°	2296.7
6°	2260.4
7°	2224.2
8°	2197.0
9°	2185.6
10°	2160.7
11°	2122.1
12°	2104.0
13°	2094.9
14°	2076.8
15°	2038.3
16°	1986.1
17°	1915.8
18°	1836.5
19°	1752.6
20°	1682.3
21°	1621.1
22°	1559.9
23°	1496.4
24°	1430.6
25°	1353.5
27.5°	1158.6
30°	968.1
32.5°	789.0
35°	657.5
37.5°	562.3
40°	485.2
42.5°	387.7
45°	297.0
47.5°	238.1
50°	197.3
52.5°	161.0
55°	124.7
57.5°	95.2
60°	74.8
62.5°	63.5
65°	54.4
67.5°	45.3
70°	38.5
72.5°	31.7

TEST NUMBER: P702143

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9024-4LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
75°	24.9
77.5°	18.1
80°	13.6
82.5°	9.1
85°	6.8
87.5°	4.5
90°	2.3
92.5°	2.3
95°	2.3
97.5°	2.3
100°	4.5
102.5°	2.3
105°	2.3
107.5°	0.0
110°	0.0
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)