

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702161

Luminaire Tested: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P702161  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF  
Description: FARALLON 4" LED GLASS DOWNLIGHT. CYLINDRICAL FROSTED GLASS KIT.  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2325.4 lumens  
Efficiency: N/A  
Efficacy: 57.6 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.45  
Luminous Opening: Vertical Cylinder (Dia: 0.34' x H: 0.46')  
CIE Type: Direct  
  
Input Watts (W): 40.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P702161

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF

### Luminous Intensity Polar Plot

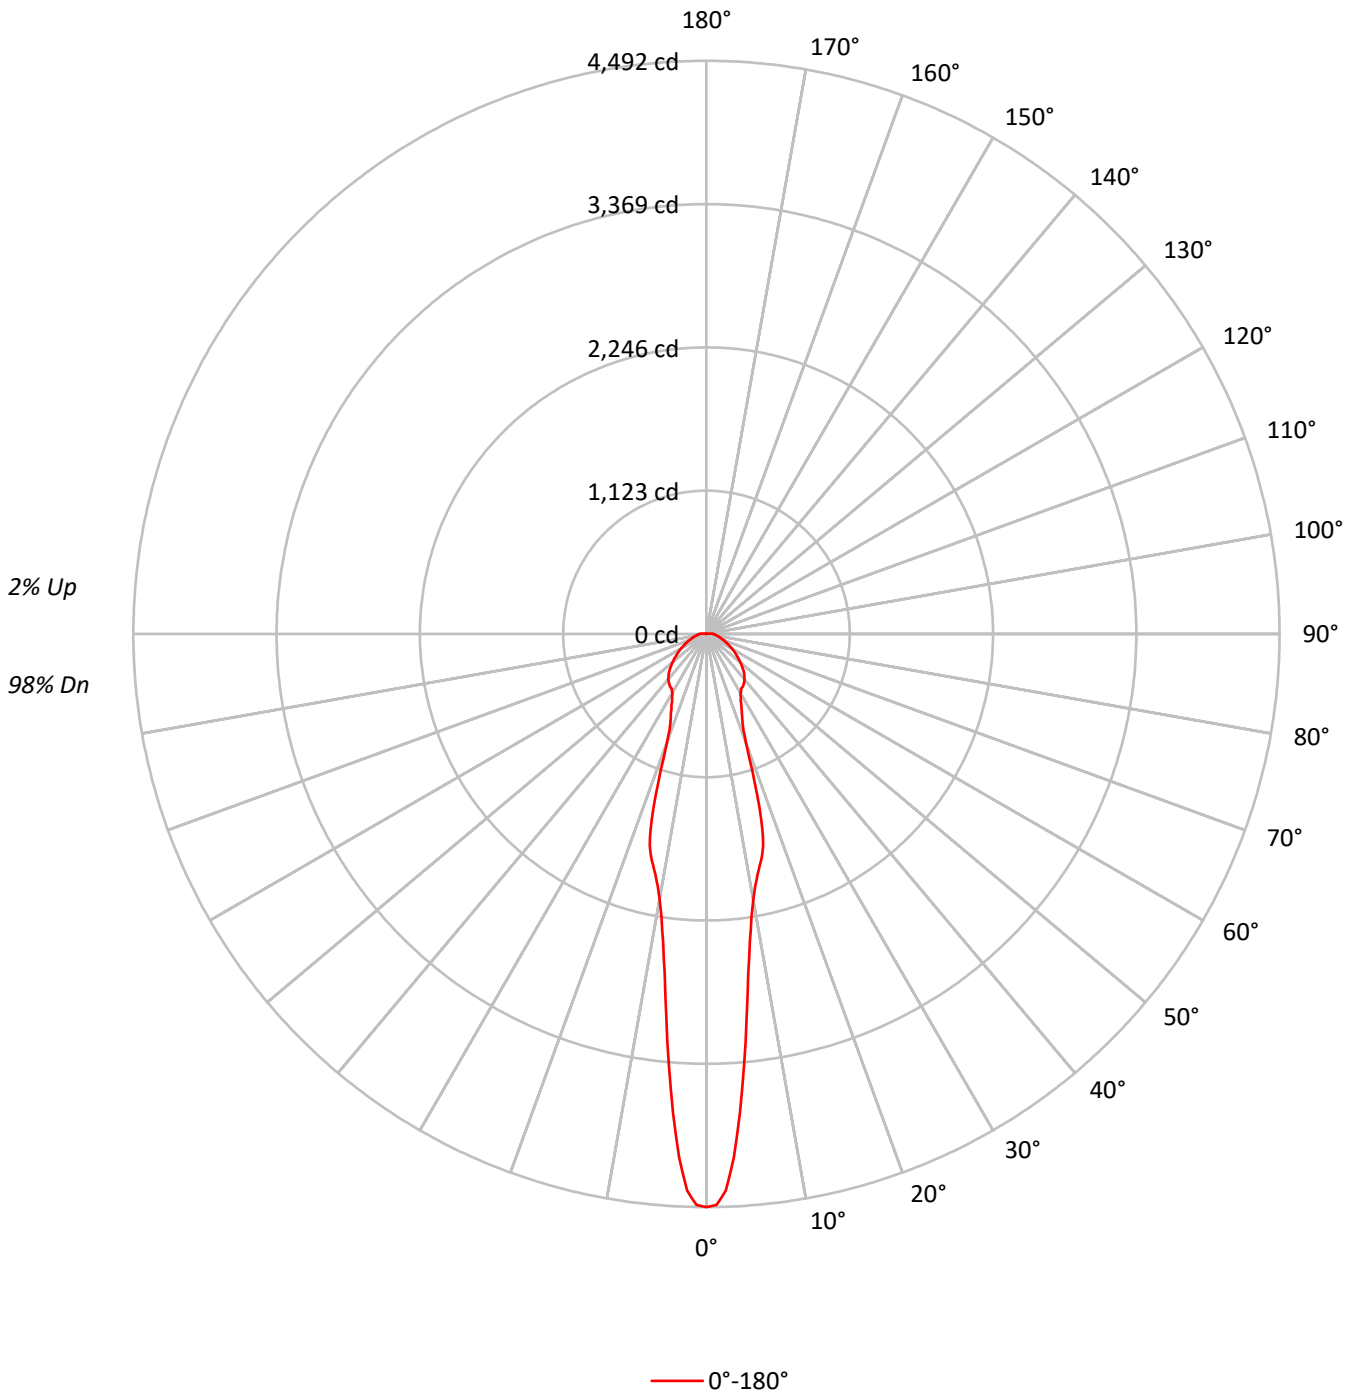

TEST NUMBER: P702161

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	98	106	103	99	96	98	95	92		94	91	89		90	88	86	84
2	101	94	88	83	98	92	86	82	88	83	80		85	81	77		81	78	75	73
3	94	85	78	72	91	83	76	71	80	74	70		77	72	68		74	70	67	65
4	87	77	70	64	85	76	69	63	73	67	62		71	65	61		68	64	60	58
5	82	71	63	57	80	70	62	57	67	61	56		65	60	55		63	59	55	53
6	77	65	58	52	75	64	57	52	62	56	51		61	55	51		59	54	50	48
7	72	61	53	48	71	60	53	48	58	52	47		57	51	47		55	50	46	45
8	69	57	49	44	67	56	49	44	55	48	44		53	48	43		52	47	43	41
9	65	53	46	41	64	53	46	41	52	45	41		50	45	41		49	44	40	39
10	62	50	43	39	61	50	43	39	49	43	39		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	520973
5°	343848
10°	191260
15°	141650
20°	68370
25°	46557
30°	36184
35°	32326
40°	29001
45°	25099
50°	20746
55°	16841
60°	13587
65°	10763
70°	8453
75°	6799
80°	5461
85°	4428

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 25099 cd/sqm

TEST NUMBER: P702161

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	277.5	11.9
10°-20°	437.9	18.8
20°-30°	304.3	13.1
30°-40°	311.9	13.4
40°-50°	316.1	13.6
50°-60°	256.4	11.0
60°-70°	181.1	7.8
70°-80°	118.3	5.1
80°-90°	74.4	3.2
90°-100°	40.1	1.7
100°-110°	7.6	0.3
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1019.7	43.9
0°-40°	1331.6	57.3
0°-60°	1904.0	81.9
0°-90°	2277.7	98.0
90°-120°	47.7	2.0
90°-150°	47.7	2.0
90°-180°	48.0	2.1
0°-180°	2325.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4492	
5°	3392	277
15°	1716	438
25°	652	304
35°	500	312
45°	413	316
55°	285	256
65°	182	181
75°	111	118
85°	68	59
90°	52	29
95°	38	27
105°	5	8
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702161

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4491.8
1°	4475.5
2°	4364.2
3°	4108.9
4°	3764.0
5°	3392.0
6°	3017.2
7°	2680.4
8°	2438.7
9°	2248.6
10°	2110.1
11°	2009.6
12°	1928.2
13°	1860.3
14°	1795.1
15°	1716.3
16°	1591.4
17°	1420.3
18°	1224.8
19°	1037.4
20°	896.2
21°	809.3
22°	752.3
23°	717.0
24°	684.4
25°	651.8
27.5°	581.2
30°	535.0
32.5°	507.8
35°	499.7
37.5°	483.4
40°	464.4
42.5°	440.0
45°	412.8
47.5°	380.2
50°	347.6
52.5°	315.0
55°	285.2
57.5°	258.0
60°	230.8
62.5°	203.7
65°	182.0
67.5°	160.2
70°	141.2
72.5°	124.9

TEST NUMBER: P702161

CATALOG NUMBER: 340-4C-35-D010 / 340-EU4C-3040-9035-4LBW1LI-CF

**CANDELA DISTRIBUTION (continued):**

	0°
75°	111.3
77.5°	97.8
80°	86.9
82.5°	76.0
85°	67.9
87.5°	59.7
90°	51.6
92.5°	46.2
95°	38.0
97.5°	27.2
100°	19.0
102.5°	10.9
105°	5.4
107.5°	2.7
110°	0.0
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)