

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702223

Luminaire Tested: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702223
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-3)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC
Description: FARALLON 4" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2864.6 lumens
Efficiency: N/A
Efficacy: 60.9 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.64
Luminous Opening: Circular (Dia: 0.34' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702223

CATALOG NUMBER: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC

Luminous Intensity Polar Plot

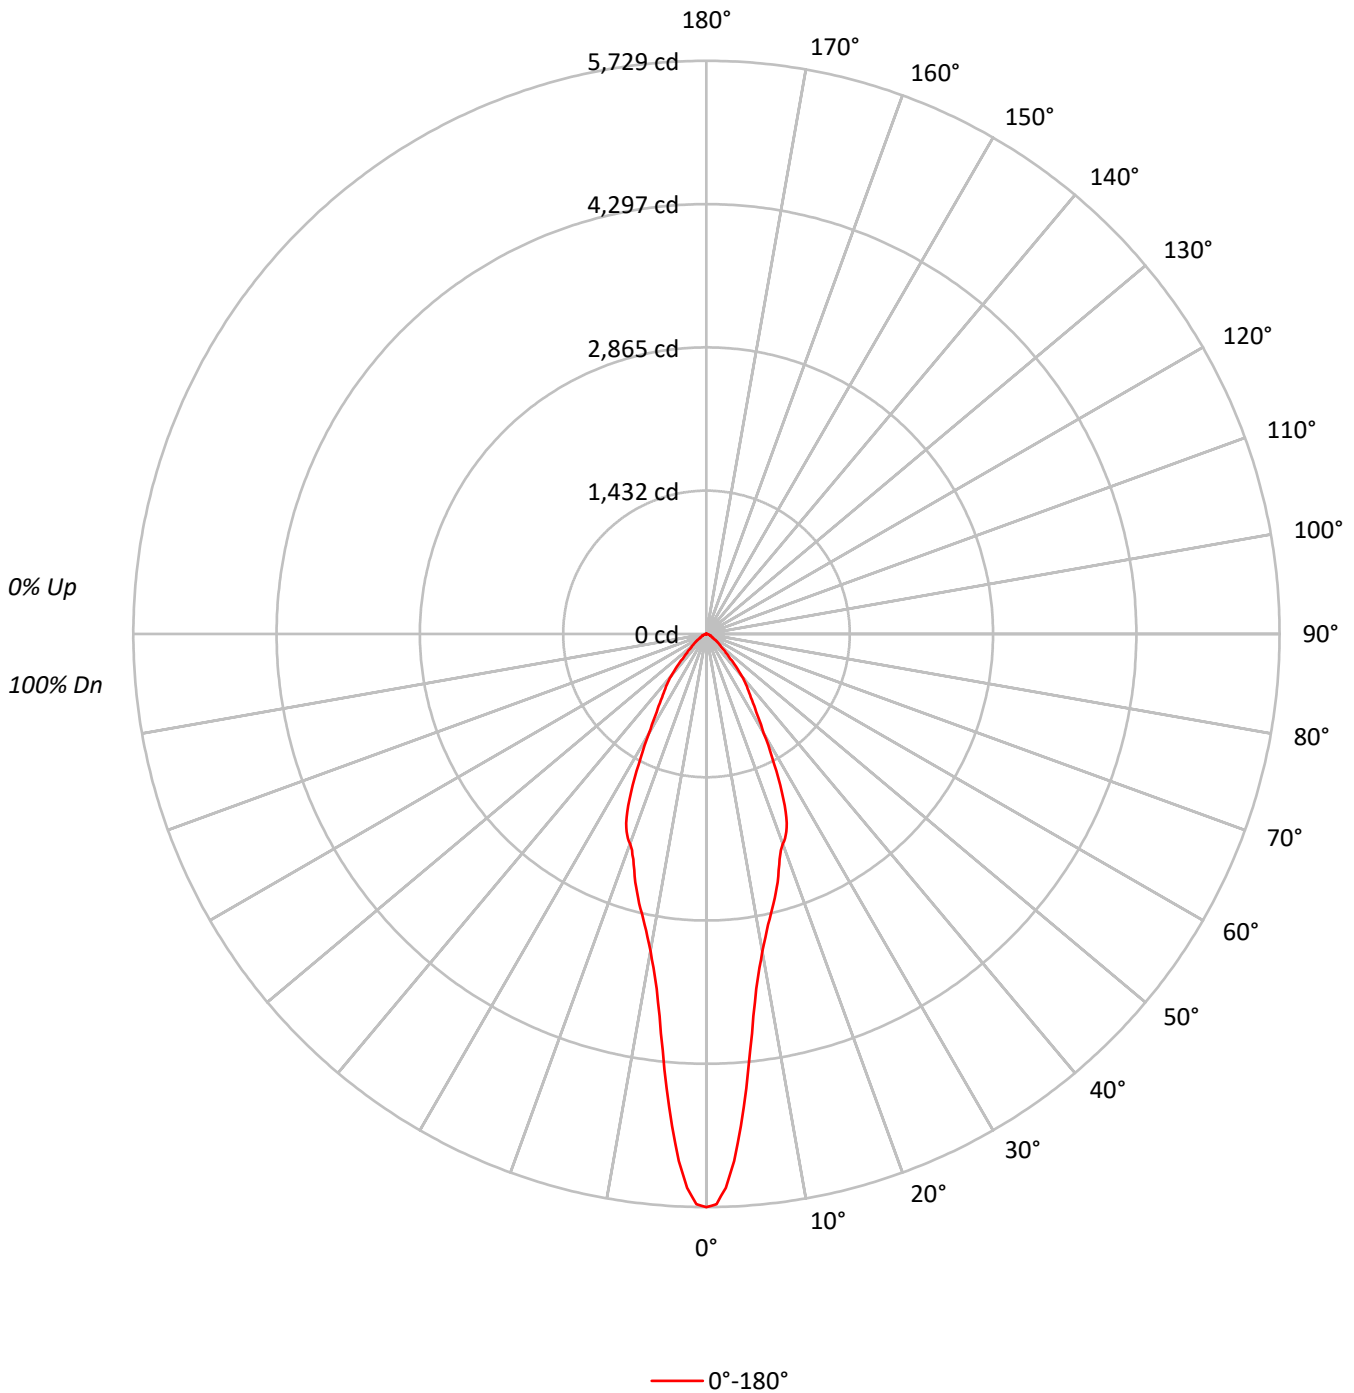

TEST NUMBER: P702223

CATALOG NUMBER: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | | 50 | 30 | 10 | | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | | 106 | 106 | 106 | | 102 | 102 | 102 | 100 |
| 1 | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | | 100 | 99 | 97 | | 97 | 96 | 94 | 93 |
| 2 | 107 | 102 | 98 | 94 | 105 | 100 | 96 | 93 | 97 | 94 | 91 | | 94 | 91 | 89 | | 91 | 89 | 87 | 85 |
| 3 | 101 | 95 | 89 | 85 | 99 | 93 | 88 | 85 | 91 | 87 | 83 | | 88 | 85 | 82 | | 86 | 83 | 81 | 79 |
| 4 | 96 | 88 | 82 | 78 | 94 | 87 | 82 | 78 | 85 | 80 | 77 | | 83 | 79 | 76 | | 81 | 78 | 75 | 73 |
| 5 | 91 | 82 | 76 | 72 | 89 | 82 | 76 | 72 | 80 | 75 | 71 | | 78 | 74 | 70 | | 76 | 73 | 70 | 68 |
| 6 | 87 | 77 | 71 | 67 | 85 | 77 | 71 | 67 | 75 | 70 | 66 | | 74 | 69 | 66 | | 72 | 68 | 65 | 64 |
| 7 | 82 | 73 | 67 | 62 | 81 | 72 | 66 | 62 | 71 | 66 | 62 | | 70 | 65 | 61 | | 68 | 64 | 61 | 60 |
| 8 | 78 | 69 | 63 | 58 | 77 | 68 | 62 | 58 | 67 | 62 | 58 | | 66 | 61 | 58 | | 65 | 61 | 57 | 56 |
| 9 | 75 | 65 | 59 | 55 | 74 | 64 | 59 | 55 | 63 | 58 | 55 | | 63 | 58 | 54 | | 62 | 57 | 54 | 53 |
| 10 | 71 | 62 | 56 | 52 | 70 | 61 | 55 | 52 | 60 | 55 | 52 | | 59 | 55 | 51 | | 59 | 54 | 51 | 50 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 664514 |
| 5° | 530775 |
| 10° | 379368 |
| 15° | 321632 |
| 20° | 275698 |
| 25° | 233372 |
| 30° | 153385 |
| 35° | 109449 |
| 40° | 83591 |
| 45° | 49158 |
| 50° | 32443 |
| 55° | 23598 |
| 60° | 15379 |
| 65° | 13859 |
| 70° | 11767 |
| 75° | 8470 |
| 80° | 6345 |
| 85° | 4258 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 49158 cd/sqm

TEST NUMBER: P702223

CATALOG NUMBER: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 387.6 | 13.5 |
| 10°-20° | 744.9 | 26.0 |
| 20°-30° | 804.6 | 28.1 |
| 30°-40° | 497.0 | 17.3 |
| 40°-50° | 248.9 | 8.7 |
| 50°-60° | 104.4 | 3.6 |
| 60°-70° | 49.1 | 1.7 |
| 70°-80° | 21.6 | 0.8 |
| 80°-90° | 4.7 | 0.2 |
| 90°-100° | 0.4 | 0.0 |
| 100°-110° | 1.3 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1937.1 | 67.6 |
| 0°-40° | 2434.0 | 85.0 |
| 0°-60° | 2787.4 | 97.3 |
| 0°-90° | 2862.8 | 99.9 |
| 90°-120° | 1.7 | 0.1 |
| 90°-150° | 1.7 | 0.1 |
| 90°-180° | 2.0 | 0.1 |
| 0°-180° | 2864.6 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|------|------|------|
| 0° | 5729 | |
| 5° | 4559 | 388 |
| 15° | 2679 | 745 |
| 25° | 1824 | 805 |
| 35° | 773 | 497 |
| 45° | 300 | 249 |
| 55° | 117 | 104 |
| 65° | 50 | 49 |
| 75° | 19 | 22 |
| 85° | 3 | 4 |
| 90° | 0 | 0 |
| 95° | 0 | 1 |
| 105° | 0 | 1 |
| 115° | 0 | 0 |
| 125° | 0 | 0 |
| 135° | 0 | 0 |
| 145° | 0 | 0 |
| 155° | 0 | 0 |
| 165° | 0 | 0 |
| 175° | 0 | 0 |
| 180° | 0 | 0 |

TEST NUMBER: P702223

CATALOG NUMBER: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 5729.4 |
| 1° | 5701.0 |
| 2° | 5540.1 |
| 3° | 5275.1 |
| 4° | 4931.2 |
| 5° | 4558.9 |
| 6° | 4186.6 |
| 7° | 3849.1 |
| 8° | 3580.9 |
| 9° | 3379.0 |
| 10° | 3221.2 |
| 11° | 3085.6 |
| 12° | 2968.8 |
| 13° | 2867.9 |
| 14° | 2776.4 |
| 15° | 2678.6 |
| 16° | 2580.8 |
| 17° | 2470.3 |
| 18° | 2369.4 |
| 19° | 2287.4 |
| 20° | 2233.7 |
| 21° | 2189.5 |
| 22° | 2132.8 |
| 23° | 2053.9 |
| 24° | 1946.6 |
| 25° | 1823.6 |
| 27.5° | 1467.1 |
| 30° | 1145.3 |
| 32.5° | 924.4 |
| 35° | 773.0 |
| 37.5° | 662.5 |
| 40° | 552.1 |
| 42.5° | 413.3 |
| 45° | 299.7 |
| 47.5° | 227.2 |
| 50° | 179.8 |
| 52.5° | 148.3 |
| 55° | 116.7 |
| 57.5° | 82.0 |
| 60° | 66.3 |
| 62.5° | 56.8 |
| 65° | 50.5 |
| 67.5° | 41.0 |
| 70° | 34.7 |
| 72.5° | 25.2 |

TEST NUMBER: P702223

CATALOG NUMBER: 340-4C-40-D010 / 340-EU4C-3040-9040-4LBW1LI-CC

CANDELA DISTRIBUTION (continued):

| | 0° |
|--------|------|
| 75° | 18.9 |
| 77.5° | 15.8 |
| 80° | 9.5 |
| 82.5° | 6.3 |
| 85° | 3.2 |
| 87.5° | 3.2 |
| 90° | 0.0 |
| 92.5° | 0.0 |
| 95° | 0.0 |
| 97.5° | 0.0 |
| 100° | 3.2 |
| 102.5° | 3.2 |
| 105° | 0.0 |
| 107.5° | 0.0 |
| 110° | 0.0 |
| 112.5° | 0.0 |
| 115° | 0.0 |
| 117.5° | 0.0 |
| 120° | 0.0 |
| 122.5° | 0.0 |
| 125° | 0.0 |
| 127.5° | 0.0 |
| 130° | 0.0 |
| 132.5° | 0.0 |
| 135° | 0.0 |
| 137.5° | 0.0 |
| 140° | 0.0 |
| 142.5° | 0.0 |
| 145° | 0.0 |
| 147.5° | 0.0 |
| 150° | 0.0 |
| 152.5° | 0.0 |
| 155° | 0.0 |
| 157.5° | 0.0 |
| 160° | 0.0 |
| 162.5° | 0.0 |
| 165° | 0.0 |
| 167.5° | 0.0 |
| 170° | 0.0 |
| 172.5° | 0.0 |
| 175° | 0.0 |
| 177.5° | 0.0 |
| 180° | 0.0 |

(END OF REPORT)