

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P701764

Luminaire Tested: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P701764  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF  
Description: FARALLON 4" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 402.7 lumens  
Efficiency: N/A  
Efficacy: 55.9 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.73  
Luminous Opening: Vertical Cylinder (Dia: 0.34' x H: 0.46')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P701764

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF

### Luminous Intensity Polar Plot

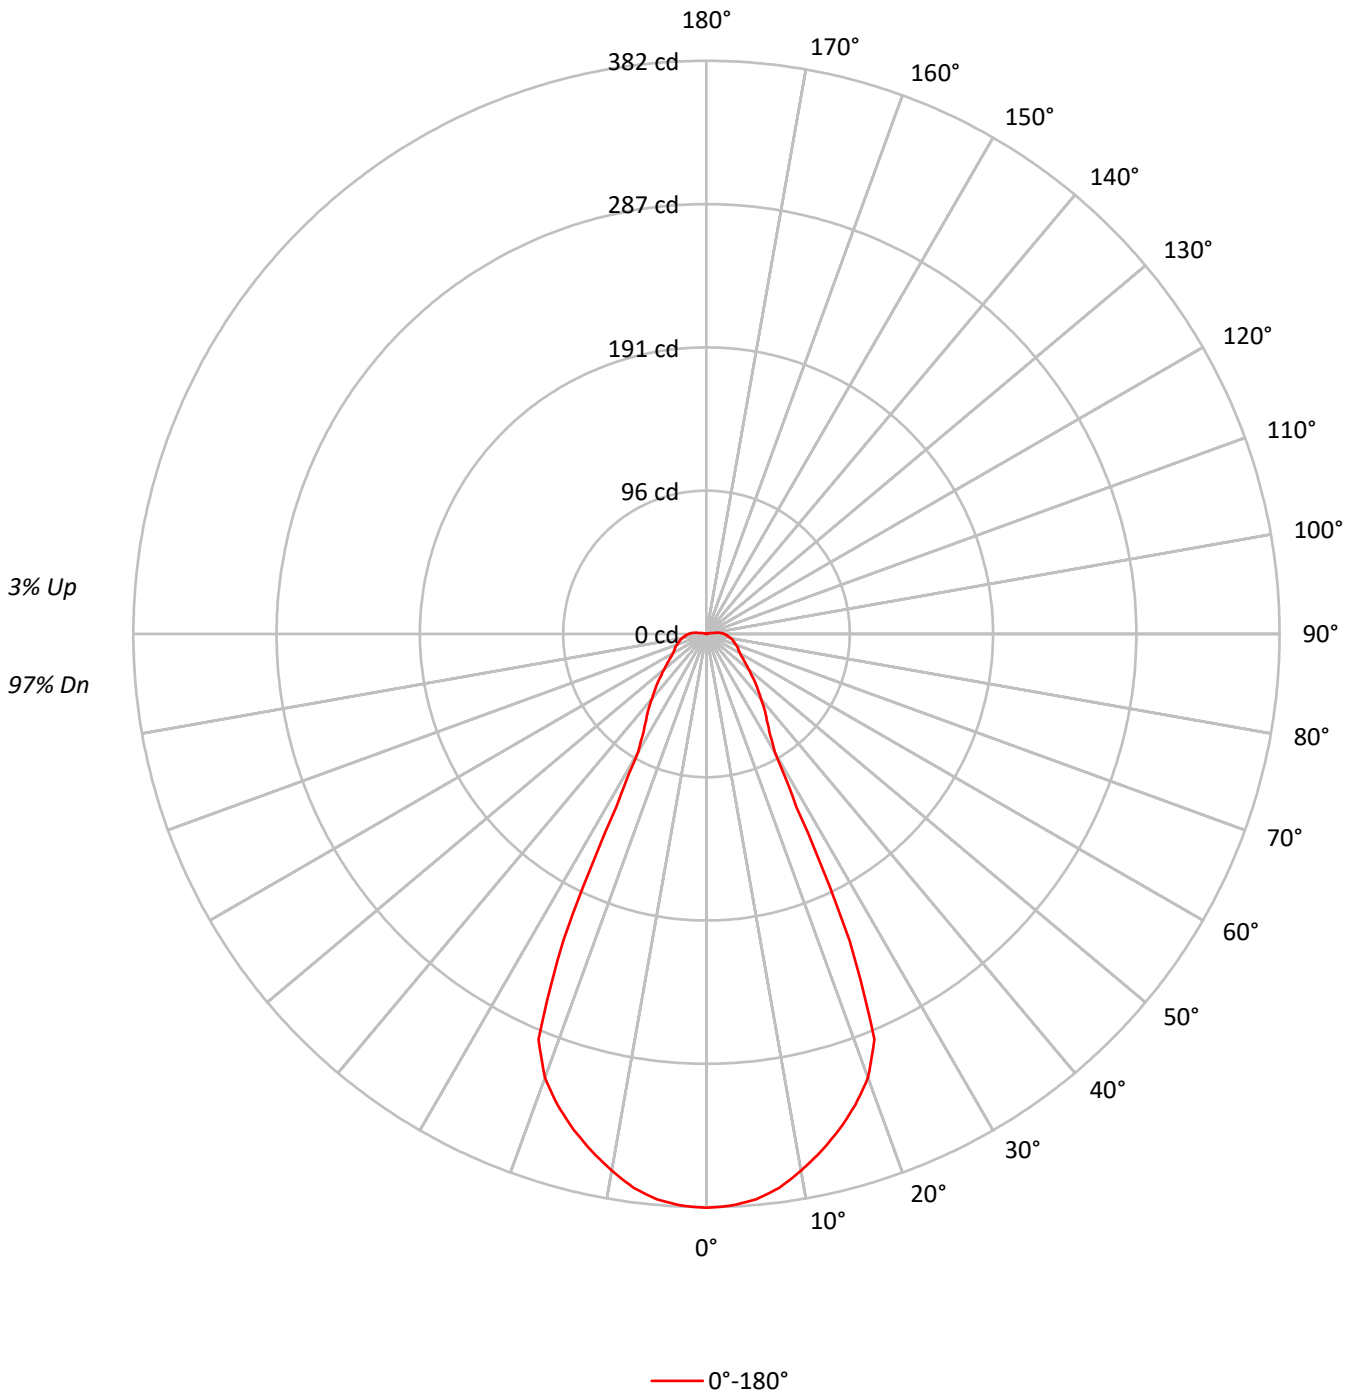

TEST NUMBER: P701764

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	110	110	110		104	104	104		100	100	100	97
1	109	105	102	98	107	103	99	96	98	95	93		94	92	90		90	88	86	84
2	102	95	89	85	99	93	88	83	89	85	81		86	82	79		82	80	77	75
3	95	87	80	75	93	85	79	74	82	77	72		79	75	71		76	73	69	67
4	89	80	73	67	87	78	72	67	76	70	65		73	68	64		71	67	63	61
5	84	74	66	61	82	73	66	61	70	64	60		68	63	59		66	62	58	56
6	79	69	61	56	78	68	61	56	66	60	55		64	59	55		62	58	54	52
7	75	64	57	52	73	63	56	52	62	56	51		60	55	51		59	54	50	49
8	71	60	53	48	70	59	53	48	58	52	48		57	51	47		55	51	47	45
9	68	57	50	45	66	56	50	45	55	49	45		54	48	44		53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42		51	46	42		50	45	42	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	44364
5°	38358
10°	32930
15°	28226
20°	24016
25°	16129
30°	6148
35°	4541
40°	3535
45°	2797
50°	2202
55°	1789
60°	1519
65°	1372
70°	1239
75°	1142
80°	1050
85°	920

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2797 cd/sqm

TEST NUMBER: P701764

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	35.6	8.8
10°-20°	95.9	23.8
20°-30°	94.9	23.6
30°-40°	44.5	11.1
40°-50°	35.5	8.8
50°-60°	27.4	6.8
60°-70°	23.0	5.7
70°-80°	19.8	4.9
80°-90°	15.4	3.8
90°-100°	8.9	2.2
100°-110°	1.6	0.4
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	226.5	56.2
0°-40°	271.0	67.3
0°-60°	334.0	82.9
0°-90°	392.2	97.4
90°-120°	10.5	2.6
90°-150°	10.5	2.6
90°-180°	11.0	2.7
0°-180°	402.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	382	
5°	378	36
15°	342	96
25°	226	95
35°	70	45
45°	46	36
55°	30	27
65°	23	23
75°	19	20
85°	14	12
90°	12	6
95°	9	6
105°	1	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	

TEST NUMBER: P701764

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	382.5
2.5°	381.4
5°	378.4
7.5°	372.3
10°	363.3
12.5°	353.1
15°	342.0
17.5°	329.4
20°	314.8
22.5°	292.5
25°	225.8
27.5°	129.8
30°	90.9
32.5°	78.3
35°	70.2
37.5°	63.7
40°	56.6
42.5°	51.0
45°	46.0
47.5°	40.9
50°	36.9
52.5°	33.3
55°	30.3
57.5°	27.8
60°	25.8
62.5°	24.3
65°	23.2
67.5°	22.2
70°	20.7
72.5°	19.7
75°	18.7
77.5°	17.7
80°	16.7
82.5°	15.2
85°	14.1
87.5°	13.1
90°	11.6
92.5°	10.6
95°	8.6
97.5°	5.6
100°	4.0
102.5°	2.5
105°	1.0
107.5°	0.5
110°	0.0

TEST NUMBER: P701764

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-FF

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)