

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P701778

Luminaire Tested: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P701778  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF  
Description: FARALLON 4" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 408.6 lumens  
Efficiency: N/A  
Efficacy: 56.8 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.73  
Luminous Opening: Vertical Cylinder (Dia: 0.34' x H: 0.46')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P701778

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF

### Luminous Intensity Polar Plot

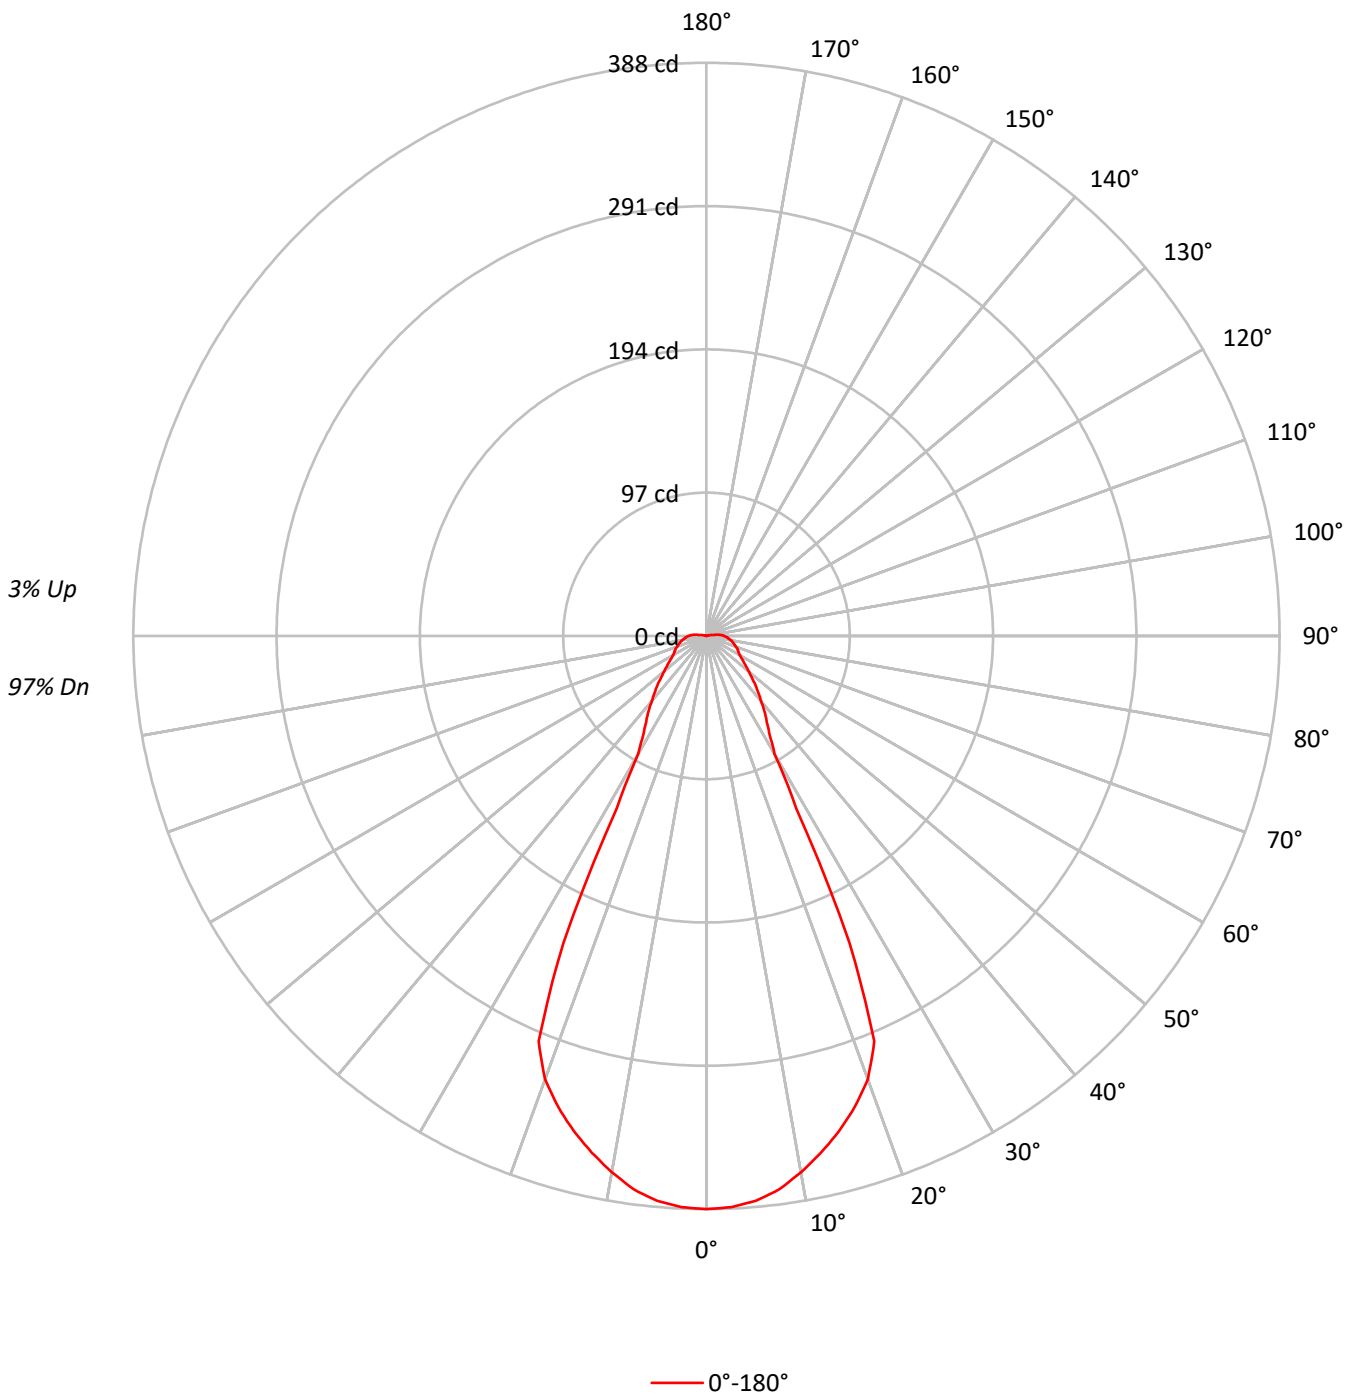

TEST NUMBER: P701778

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	110	110	110		104	104	104		100	100	100	97
1	109	105	102	98	107	103	99	96	98	95	93		94	92	90		90	88	86	84
2	102	95	89	85	99	93	88	83	89	85	81		86	82	79		82	80	77	75
3	95	87	80	75	93	85	79	74	82	77	72		79	75	71		76	73	69	67
4	89	80	73	67	87	78	72	67	76	70	65		73	68	64		71	67	63	61
5	84	74	66	61	82	73	66	61	70	64	60		68	63	59		66	62	58	56
6	79	69	61	56	78	68	61	56	66	60	55		64	59	55		62	58	54	52
7	75	64	57	52	73	63	56	52	62	56	51		60	55	51		59	54	50	49
8	71	60	53	48	70	59	53	48	58	52	48		57	51	47		55	51	47	45
9	68	57	50	45	66	56	50	45	55	49	45		54	48	44		53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42		51	46	42		50	45	42	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	45001
5°	38916
10°	33410
15°	28639
20°	24367
25°	16364
30°	6243
35°	4612
40°	3585
45°	2833
50°	2232
55°	1819
60°	1536
65°	1396
70°	1257
75°	1161
80°	1062
85°	939

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2833 cd/sqm

TEST NUMBER: P701778

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	36.2	8.8
10°-20°	97.3	23.8
20°-30°	96.3	23.6
30°-40°	45.2	11.1
40°-50°	36.0	8.8
50°-60°	27.8	6.8
60°-70°	23.4	5.7
70°-80°	20.0	4.9
80°-90°	15.7	3.8
90°-100°	9.0	2.2
100°-110°	1.6	0.4
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	229.8	56.2
0°-40°	275.0	67.3
0°-60°	338.9	82.9
0°-90°	397.9	97.4
90°-120°	10.7	2.6
90°-150°	10.7	2.6
90°-180°	11.0	2.7
0°-180°	408.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	388	
5°	384	36
15°	347	97
25°	229	96
35°	71	45
45°	47	36
55°	31	28
65°	24	23
75°	19	20
85°	14	12
90°	12	7
95°	9	6
105°	1	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	

TEST NUMBER: P701778

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	388.0
2.5°	387.0
5°	383.9
7.5°	377.8
10°	368.6
12.5°	358.3
15°	347.0
17.5°	334.2
20°	319.4
22.5°	296.8
25°	229.1
27.5°	131.7
30°	92.3
32.5°	79.5
35°	71.3
37.5°	64.6
40°	57.4
42.5°	51.8
45°	46.6
47.5°	41.5
50°	37.4
52.5°	33.8
55°	30.8
57.5°	28.2
60°	26.1
62.5°	24.6
65°	23.6
67.5°	22.6
70°	21.0
72.5°	20.0
75°	19.0
77.5°	17.9
80°	16.9
82.5°	15.4
85°	14.4
87.5°	13.3
90°	11.8
92.5°	10.8
95°	8.7
97.5°	5.6
100°	4.1
102.5°	2.6
105°	1.0
107.5°	0.5
110°	0.0

TEST NUMBER: P701778

CATALOG NUMBER: 340-4C-05-D010 / 340-EU4C-1020-9040-4LBW1LI-FF

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)