

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P701833

Luminaire Tested: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P701833
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-5)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ
Description: FARALLON 4" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 571.2 lumens
Efficiency: N/A
Efficacy: 57.7 lumens/watt
Spacing Criteria (0/90/45): 0.33 / 0.33 / 0.46
Luminous Opening: Vertical Cylinder (Dia: 0.34' x H: 0.46')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P701833

CATALOG NUMBER: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

Luminous Intensity Polar Plot

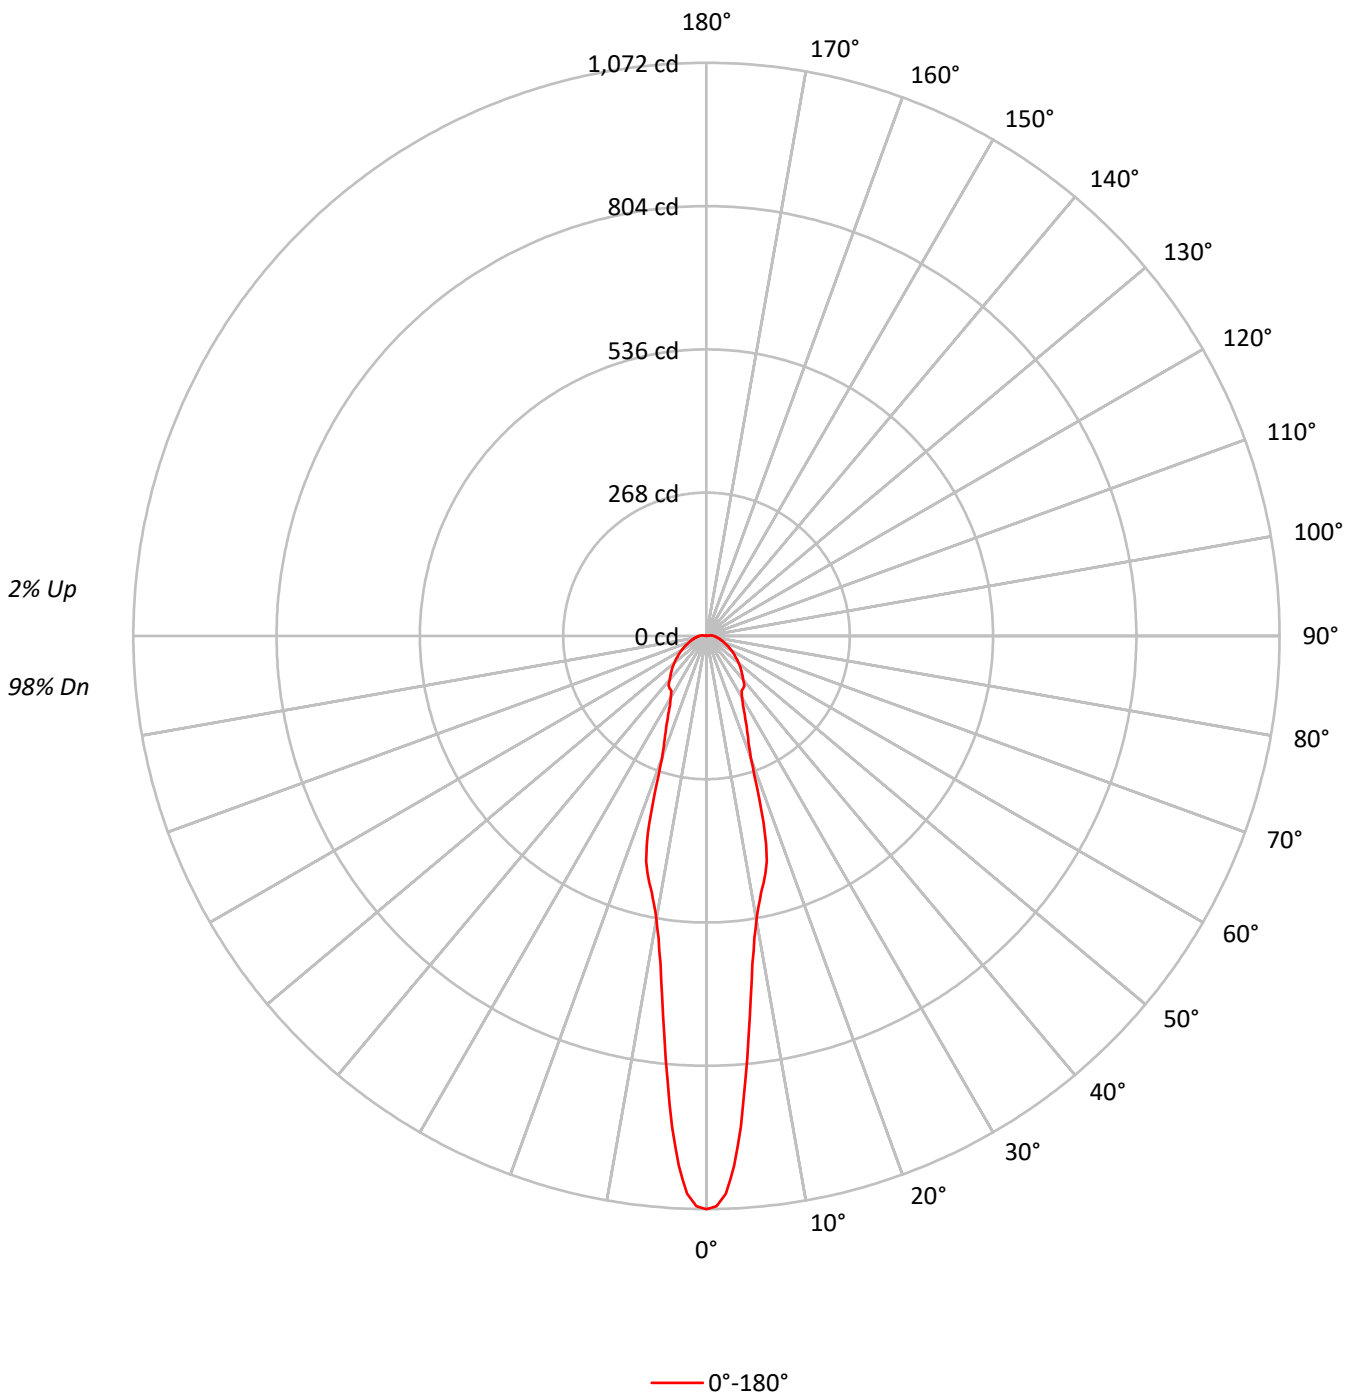

TEST NUMBER: P701833

CATALOG NUMBER: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	98	106	103	99	96	98	95	92		94	91	89		90	88	86	84
2	101	94	88	83	99	92	87	82	88	84	80		85	81	78		81	78	76	74
3	94	85	78	72	92	83	77	72	80	75	70		77	73	69		75	71	67	65
4	88	78	70	64	86	76	69	64	74	68	63		71	66	62		69	64	61	59
5	82	71	64	58	80	70	63	58	68	62	57		66	60	56		64	59	55	53
6	77	66	58	53	76	65	58	53	63	57	52		61	56	52		60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48		58	52	48		56	51	47	45
8	69	58	50	45	68	57	50	45	55	49	45		54	49	44		53	48	44	42
9	66	54	47	42	64	54	47	42	52	46	42		51	46	42		50	45	41	40
10	63	51	44	40	61	51	44	40	50	44	39		49	43	39		48	43	39	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124346
5°	84624
10°	48773
15°	35984
20°	18523
25°	12321
30°	9002
35°	7763
40°	6676
45°	5618
50°	4691
55°	3868
60°	3167
65°	2573
70°	2065
75°	1686
80°	1389
85°	1122

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5618 cd/sqm

TEST NUMBER: P701833

CATALOG NUMBER: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.1	12.1
10°-20°	112.5	19.7
20°-30°	80.5	14.1
30°-40°	74.9	13.1
40°-50°	71.3	12.5
50°-60°	58.7	10.3
60°-70°	43.2	7.6
70°-80°	29.5	5.2
80°-90°	19.0	3.3
90°-100°	10.5	1.8
100°-110°	1.9	0.3
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	262.2	45.9
0°-40°	337.1	59.0
0°-60°	467.1	81.8
0°-90°	558.8	97.8
90°-120°	12.4	2.2
90°-150°	12.4	2.2
90°-180°	12.0	2.1
0°-180°	571.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1072	
5°	835	69
15°	436	113
25°	172	81
35°	120	75
45°	92	71
55°	66	59
65°	44	43
75°	28	29
85°	17	15
90°	14	8
95°	10	7
105°	1	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P701833

CATALOG NUMBER: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

CANDELA DISTRIBUTION (FULL):

0°	
0°	1072.1
1°	1066.6
2°	1043.8
3°	992.1
4°	920.3
5°	834.8
6°	753.4
7°	680.2
8°	618.8
9°	572.6
10°	538.1
11°	512.6
12°	491.2
13°	474.0
14°	456.7
15°	436.0
16°	405.7
17°	365.6
18°	318.7
19°	275.3
20°	242.8
21°	222.8
22°	208.3
23°	195.9
24°	184.2
25°	172.5
27.5°	148.3
30°	133.1
32.5°	122.1
35°	120.0
37.5°	116.6
40°	106.9
42.5°	99.3
45°	92.4
47.5°	85.5
50°	78.6
52.5°	71.7
55°	65.5
57.5°	59.3
60°	53.8
62.5°	48.3
65°	43.5
67.5°	38.6
70°	34.5
72.5°	31.0

TEST NUMBER: P701833

CATALOG NUMBER: 340-4C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

CANDELA DISTRIBUTION (continued):

	0°
75°	27.6
77.5°	24.8
80°	22.1
82.5°	19.3
85°	17.2
87.5°	15.2
90°	13.8
92.5°	12.4
95°	9.7
97.5°	6.9
100°	4.8
102.5°	2.8
105°	1.4
107.5°	0.7
110°	0.0
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)