

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702430

Luminaire Tested: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P702430  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1201.1 lumens  
Efficiency: N/A  
Efficacy: 76.0 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 15.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P702430

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

### Luminous Intensity Polar Plot

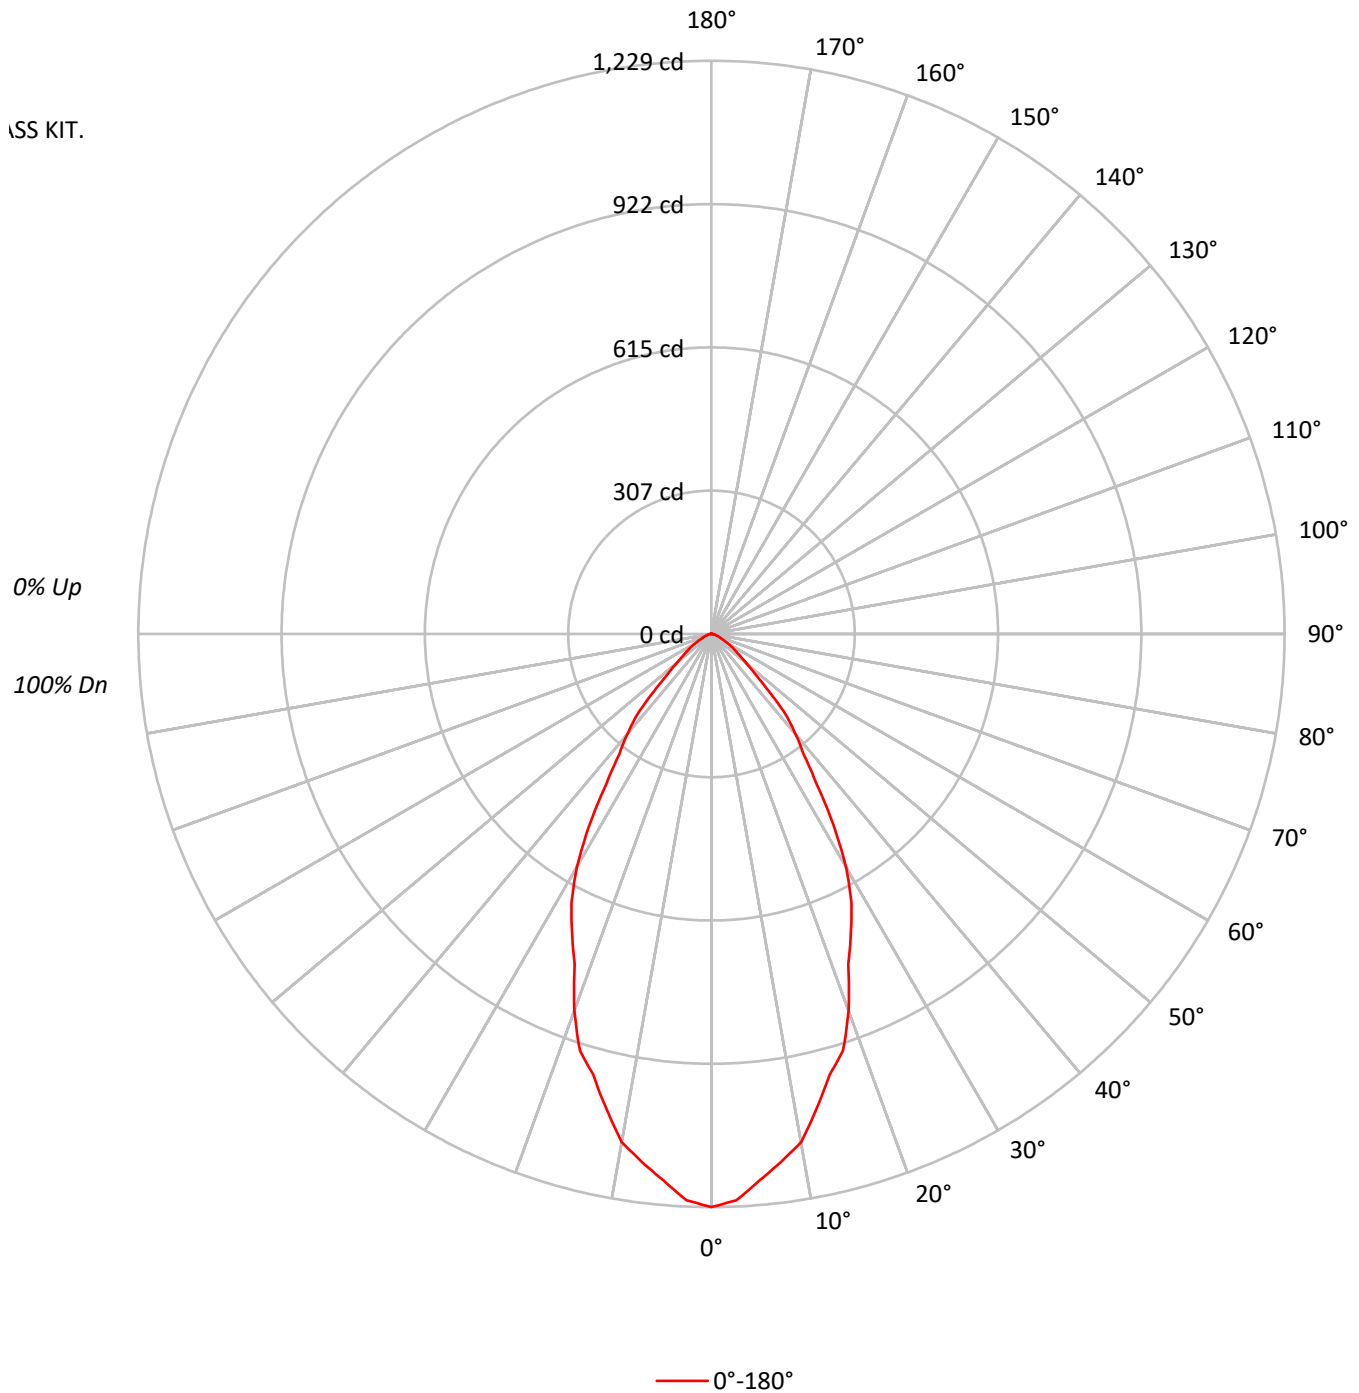

TEST NUMBER: P702430

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	80168
5°	77068
10°	73316
15°	66090
20°	59701
25°	50929
30°	43460
35°	31308
40°	23897
45°	16072
50°	9947
55°	7154
60°	5206
65°	3551
70°	2995
75°	2445
80°	2254
85°	1797

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16072 cd/sqm

TEST NUMBER: P702430

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	110.2	9.2
10°-20°	276.0	23.0
20°-30°	325.3	27.1
30°-40°	252.9	21.1
40°-50°	138.8	11.6
50°-60°	57.8	4.8
60°-70°	24.5	2.0
70°-80°	10.5	0.9
80°-90°	2.9	0.2
90°-100°	1.3	0.1
100°-110°	0.8	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	711.5	59.2
0°-40°	964.4	80.3
0°-60°	1161.1	96.7
0°-90°	1199.0	99.8
90°-120°	2.1	0.2
90°-150°	2.1	0.2
90°-180°	2.0	0.2
0°-180°	1201.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1229	
5°	1177	110
15°	978	276
25°	708	325
35°	393	253
45°	174	139
55°	63	58
65°	23	24
75°	10	11
85°	2	3
90°	1	1
95°	1	1
105°	1	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702430

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1228.8
2.5°	1215.5
5°	1176.8
7.5°	1141.7
10°	1106.7
12.5°	1042.6
15°	978.5
17.5°	937.3
20°	859.9
22.5°	766.8
25°	707.5
27.5°	649.5
30°	576.9
32.5°	488.6
35°	393.1
37.5°	324.1
40°	280.6
42.5°	238.3
45°	174.2
47.5°	125.8
50°	98.0
52.5°	77.4
55°	62.9
57.5°	50.8
60°	39.9
62.5°	29.0
65°	23.0
67.5°	19.4
70°	15.7
72.5°	12.1
75°	9.7
77.5°	7.3
80°	6.0
82.5°	3.6
85°	2.4
87.5°	1.2
90°	1.2
92.5°	1.2
95°	1.2
97.5°	1.2
100°	1.2
102.5°	1.2
105°	1.2
107.5°	0.0
110°	0.0

TEST NUMBER: P702430

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)