

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702464

Luminaire Tested: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P702464  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF  
Description: FARALLON 6" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.  
Light Source: 2700K CCT, 97 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 965.3 lumens  
Efficiency: N/A  
Efficacy: 61.1 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.81  
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P702464

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF

### Luminous Intensity Polar Plot

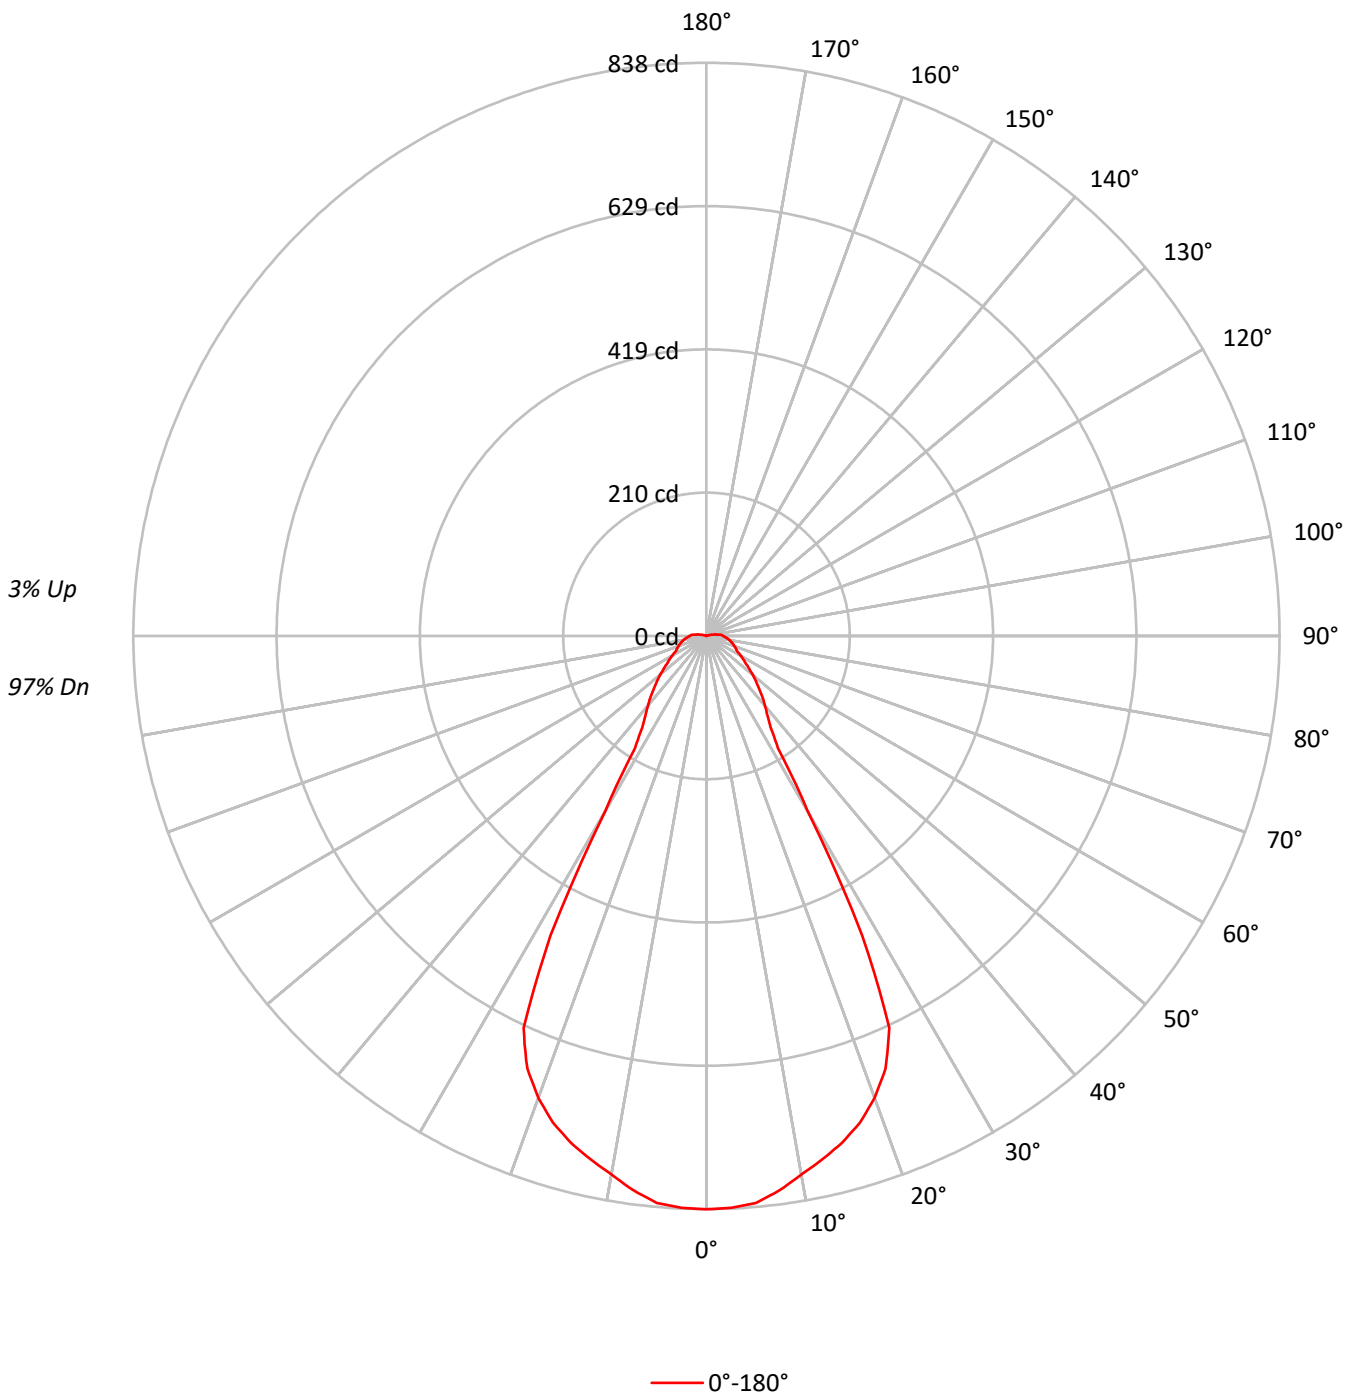

TEST NUMBER: P702464

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	110	110	110		104	104	104		99	99	99	97
1	110	106	102	99	107	103	100	97	99	96	93		94	92	90		90	89	87	85
2	102	96	90	86	100	94	89	84	90	86	82		86	83	80		83	80	78	76
3	96	87	81	76	93	86	80	75	83	77	73		80	75	72		77	73	70	68
4	90	80	73	68	88	79	72	67	76	71	66		74	69	65		71	67	64	62
5	85	74	67	62	83	73	66	61	71	65	61		69	64	60		67	62	59	57
6	80	69	62	57	78	68	61	56	66	60	56		64	59	55		63	58	54	53
7	75	64	57	52	74	64	57	52	62	56	52		60	55	51		59	54	51	49
8	71	60	53	49	70	60	53	48	58	52	48		57	52	48		56	51	47	46
9	68	57	50	45	66	56	50	45	55	49	45		54	48	45		53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42		51	46	42		50	45	42	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	54685
5°	48699
10°	42720
15°	37958
20°	33362
25°	27865
30°	12503
35°	6662
40°	5290
45°	4257
50°	3420
55°	2710
60°	2259
65°	1908
70°	1752
75°	1606
80°	1462
85°	1312

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4257 cd/sqm

TEST NUMBER: P702464

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.3	8.1
10°-20°	215.4	22.3
20°-30°	262.7	27.2
30°-40°	111.2	11.5
40°-50°	84.4	8.7
50°-60°	63.9	6.6
60°-70°	48.8	5.1
70°-80°	40.9	4.2
80°-90°	31.6	3.3
90°-100°	21.1	2.2
100°-110°	6.3	0.6
110°-120°	0.5	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	556.5	57.6
0°-40°	667.7	69.2
0°-60°	816.0	84.5
0°-90°	937.4	97.1
90°-120°	27.9	2.9
90°-150°	27.9	2.9
90°-180°	28.0	2.9
0°-180°	965.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	838	
5°	832	78
15°	767	215
25°	633	263
35°	163	111
45°	109	84
55°	70	64
65°	48	49
75°	39	41
85°	29	25
90°	24	13
95°	21	15
105°	5	6
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702464

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	838.2
2.5°	837.0
5°	832.1
7.5°	817.6
10°	799.5
12.5°	783.7
15°	766.8
17.5°	746.2
20°	718.4
22.5°	684.6
25°	632.6
27.5°	493.5
30°	296.3
32.5°	194.7
35°	163.3
37.5°	146.3
40°	133.0
42.5°	120.9
45°	108.9
47.5°	98.0
50°	88.3
52.5°	78.6
55°	70.1
57.5°	64.1
60°	58.1
62.5°	52.0
65°	48.4
67.5°	46.0
70°	43.5
72.5°	41.1
75°	38.7
77.5°	36.3
80°	33.9
82.5°	31.4
85°	29.0
87.5°	26.6
90°	24.2
92.5°	23.0
95°	20.6
97.5°	15.7
100°	12.1
102.5°	8.5
105°	4.8
107.5°	3.6
110°	1.2

TEST NUMBER: P702464

CATALOG NUMBER: 340-6C-15-D010 / 340-EU4C-1020-9727-4LBW1LI-FF

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	1.2
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)