

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702528

Luminaire Tested: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702528
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA
Light Source: 3000K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1611.1 lumens
Efficiency: N/A
Efficacy: 73.9 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702528

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC

Luminous Intensity Polar Plot

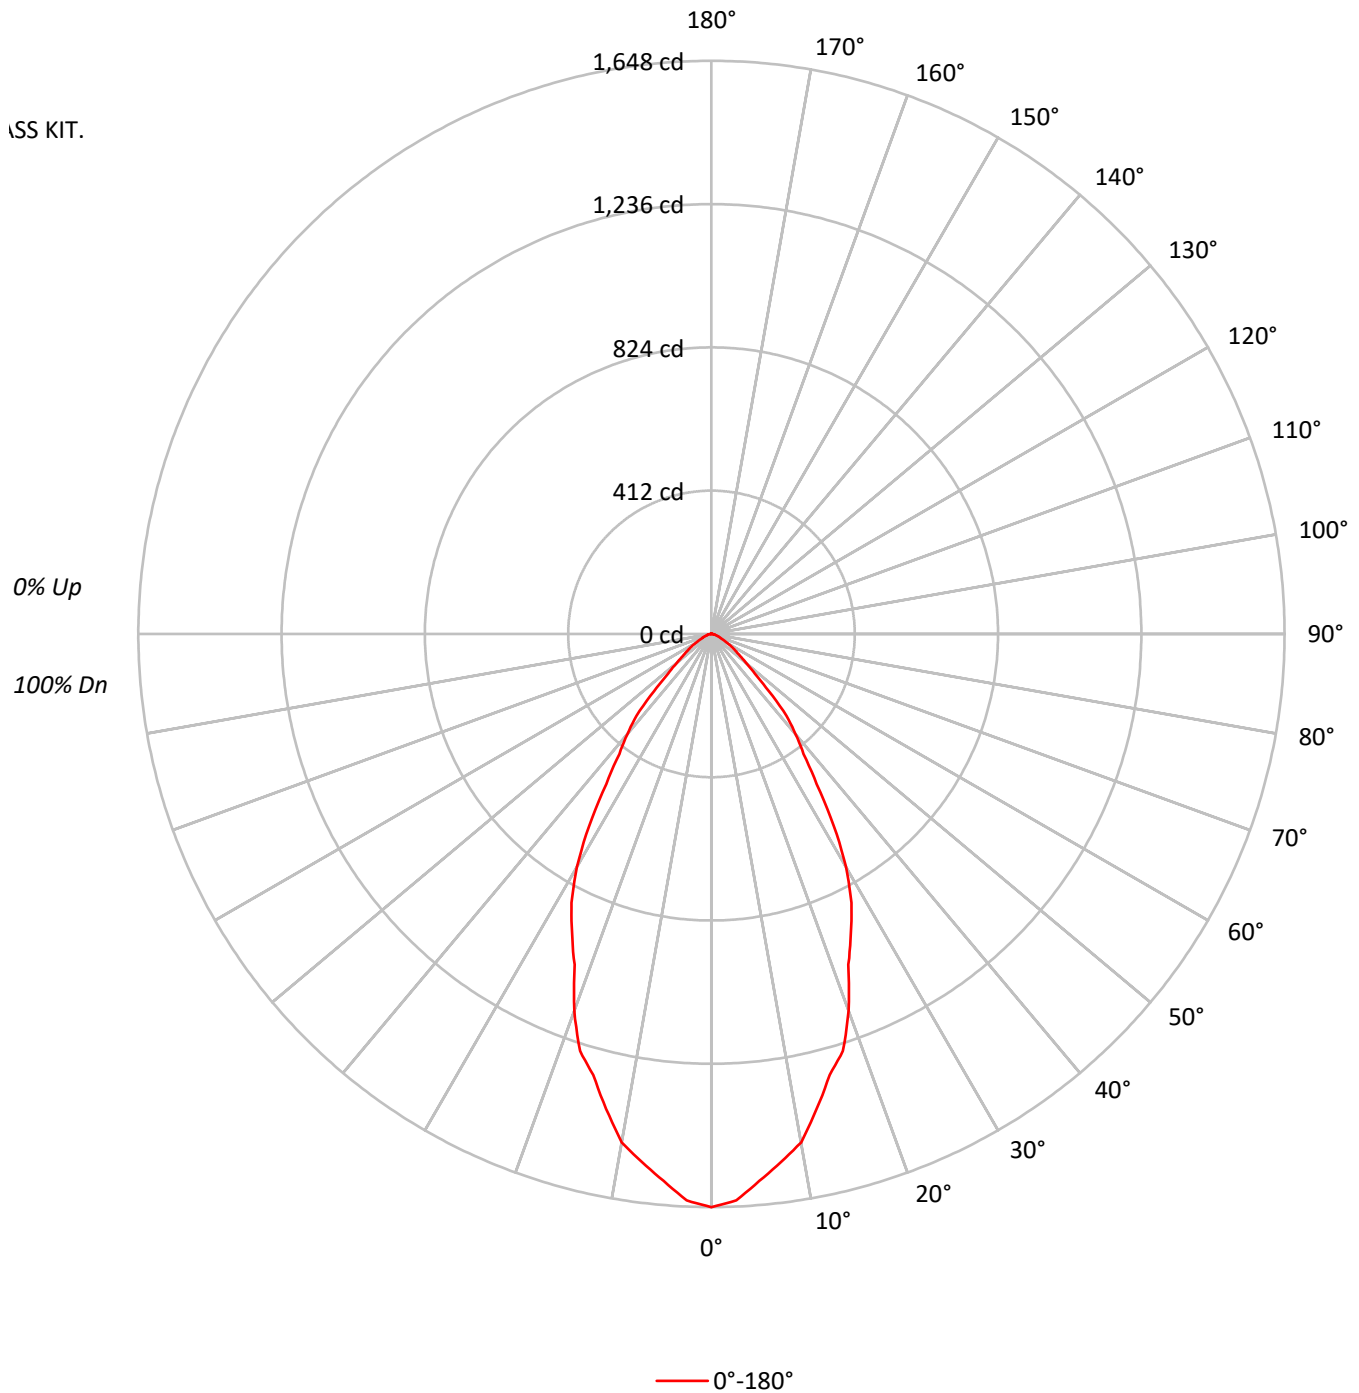

TEST NUMBER: P702528

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	96	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	107543
5°	103382
10°	98344
15°	88656
20°	80092
25°	68321
30°	58301
35°	41996
40°	32056
45°	21553
50°	13337
55°	9600
60°	6981
65°	4755
70°	4025
75°	3277
80°	3043
85°	2395

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 21553 cd/sqm

TEST NUMBER: P702528

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.9	9.2
10°-20°	370.2	23.0
20°-30°	436.4	27.1
30°-40°	339.3	21.1
40°-50°	186.1	11.6
50°-60°	77.6	4.8
60°-70°	32.8	2.0
70°-80°	14.1	0.9
80°-90°	4.0	0.2
90°-100°	1.7	0.1
100°-110°	1.1	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	954.5	59.2
0°-40°	1293.8	80.3
0°-60°	1557.4	96.7
0°-90°	1608.3	99.8
90°-120°	2.8	0.2
90°-150°	2.8	0.2
90°-180°	3.0	0.2
0°-180°	1611.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1648	
5°	1579	148
15°	1313	370
25°	949	436
35°	527	339
45°	234	186
55°	84	78
65°	31	33
75°	13	14
85°	3	4
90°	2	1
95°	2	1
105°	2	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702528

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	1648.4
2.5°	1630.6
5°	1578.6
7.5°	1531.6
10°	1484.5
12.5°	1398.5
15°	1312.6
17.5°	1257.4
20°	1153.6
22.5°	1028.6
25°	949.1
27.5°	871.3
30°	773.9
32.5°	655.5
35°	527.3
37.5°	434.8
40°	376.4
42.5°	319.6
45°	233.6
47.5°	168.7
50°	131.4
52.5°	103.8
55°	84.4
57.5°	68.1
60°	53.5
62.5°	38.9
65°	30.8
67.5°	26.0
70°	21.1
72.5°	16.2
75°	13.0
77.5°	9.7
80°	8.1
82.5°	4.9
85°	3.2
87.5°	1.6
90°	1.6
92.5°	1.6
95°	1.6
97.5°	1.6
100°	1.6
102.5°	1.6
105°	1.6
107.5°	0.0
110°	0.0

TEST NUMBER: P702528

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9730-4LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)