

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702505

Luminaire Tested: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P702505  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-13)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ  
Description: FARALLON 6" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1411.7 lumens  
Efficiency: N/A  
Efficacy: 64.8 lumens/watt  
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.54  
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')  
CIE Type: Direct  
  
Input Watts (W): 21.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P702505

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

### Luminous Intensity Polar Plot

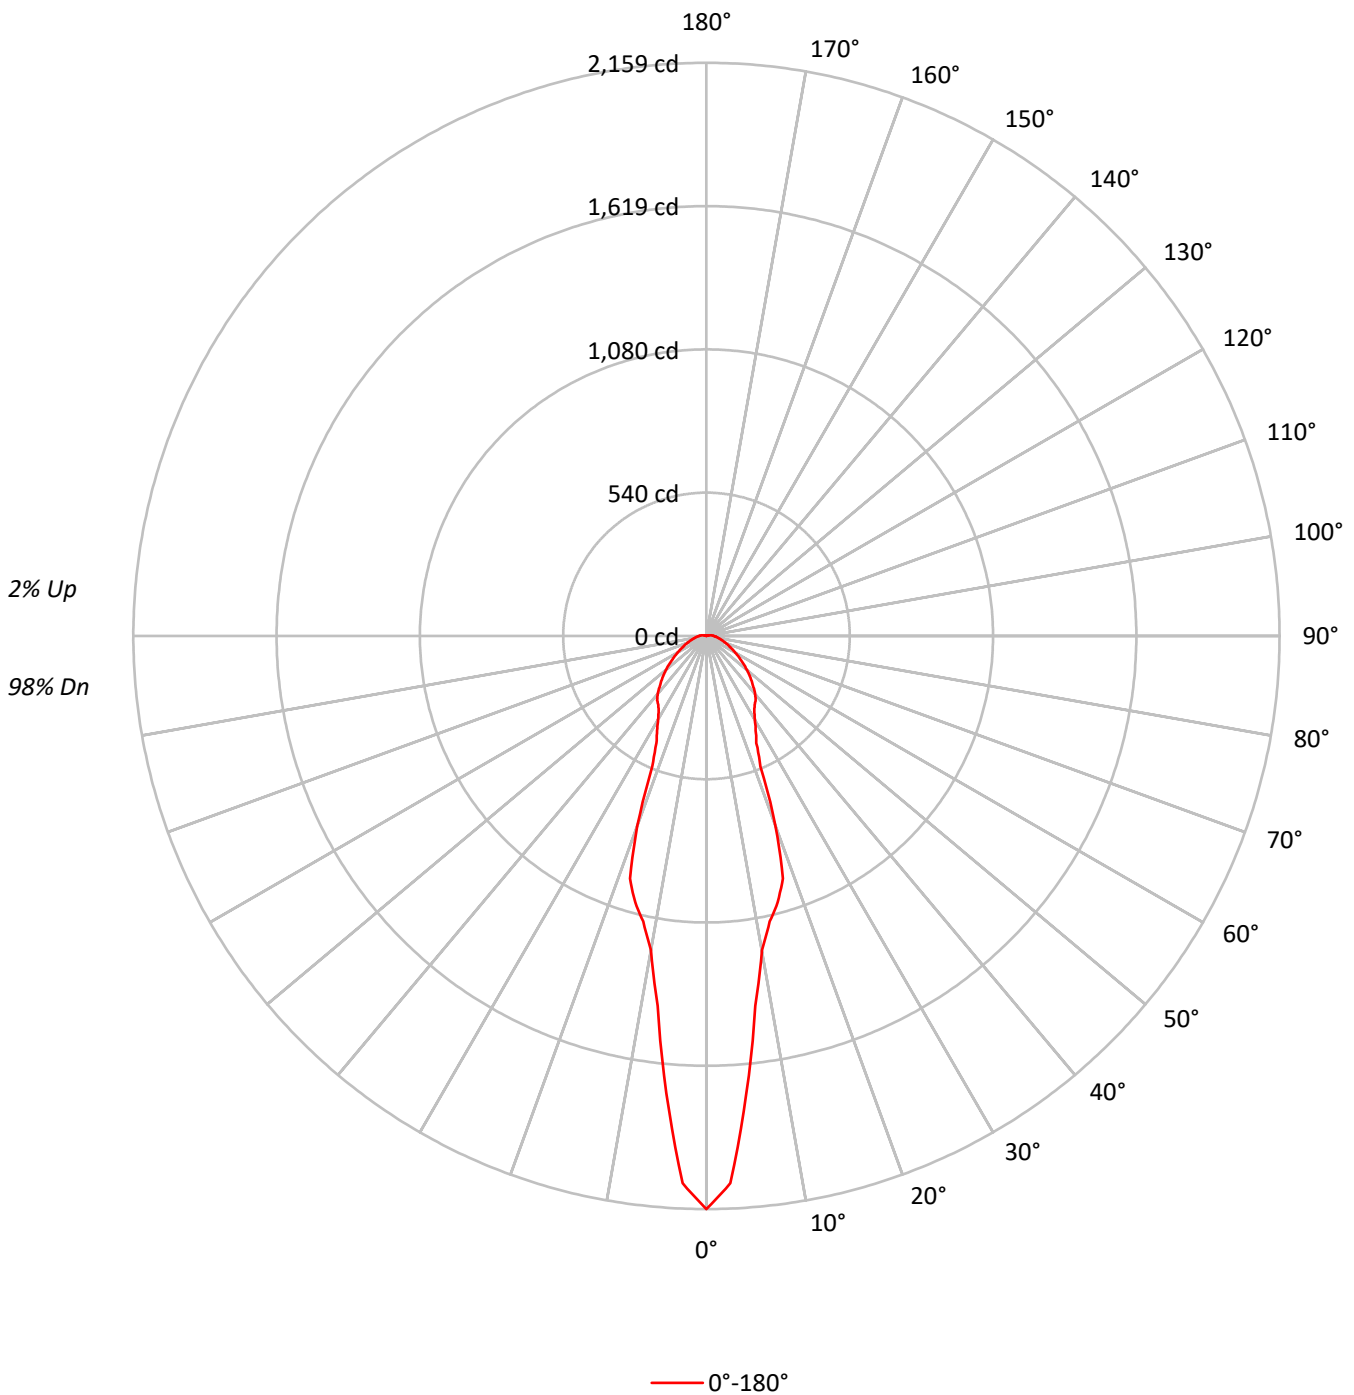

TEST NUMBER: P702505

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93		94	92	90		90	89	87	85
2	102	95	89	84	99	93	87	83	89	84	81		85	82	78		82	79	76	74
3	95	86	79	73	92	84	78	72	81	75	71		78	73	70		75	71	68	66
4	88	78	71	65	86	77	70	64	74	68	63		72	67	62		69	65	61	59
5	83	72	64	58	81	71	63	58	68	62	57		66	61	57		64	60	56	54
6	78	66	59	53	76	65	58	53	63	57	52		62	56	52		60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48		58	52	48		56	51	47	46
8	69	58	50	45	68	57	50	45	55	49	45		54	48	44		53	48	44	42
9	66	54	47	42	64	53	47	42	52	46	42		51	45	41		50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39		48	43	39		47	42	39	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	140861
5°	101185
10°	64200
15°	51398
20°	35359
25°	19602
30°	15369
35°	12907
40°	11340
45°	9406
50°	7722
55°	6116
60°	4872
65°	3831
70°	3053
75°	2460
80°	1988
85°	1642

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9406 cd/sqm

TEST NUMBER: P702505

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	147.8	10.5
10°-20°	283.6	20.1
20°-30°	220.1	15.6
30°-40°	200.2	14.2
40°-50°	185.8	13.2
50°-60°	143.0	10.1
60°-70°	97.9	6.9
70°-80°	63.5	4.5
80°-90°	39.5	2.8
90°-100°	22.9	1.6
100°-110°	7.2	0.5
110°-120°	0.2	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	651.4	46.1
0°-40°	851.7	60.3
0°-60°	1180.4	83.6
0°-90°	1381.3	97.8
90°-120°	30.4	2.2
90°-150°	30.4	2.2
90°-180°	30.0	2.1
0°-180°	1411.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2159	
5°	1729	148
15°	1038	284
25°	445	220
35°	316	200
45°	241	186
55°	158	143
65°	97	98
75°	59	64
85°	36	32
90°	26	15
95°	21	16
105°	7	7
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702505

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2159.1
2.5°	2063.5
5°	1728.9
7.5°	1405.9
10°	1201.5
12.5°	1101.0
15°	1038.3
17.5°	957.6
20°	761.4
22.5°	532.3
25°	445.0
27.5°	402.1
30°	364.2
32.5°	334.6
35°	316.4
37.5°	304.9
40°	285.1
42.5°	262.1
45°	240.6
47.5°	219.2
50°	199.4
52.5°	178.0
55°	158.2
57.5°	141.7
60°	125.3
62.5°	110.4
65°	97.2
67.5°	87.4
70°	75.8
72.5°	67.6
75°	59.3
77.5°	52.7
80°	46.1
82.5°	41.2
85°	36.3
87.5°	31.3
90°	26.4
92.5°	24.7
95°	21.4
97.5°	18.1
100°	13.2
102.5°	9.9
105°	6.6
107.5°	3.3
110°	1.6

TEST NUMBER: P702505

CATALOG NUMBER: 340-6C-20-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)