

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702537

Luminaire Tested: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-14)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, FROSTED OUTSIDE KIT.
Light Source: 2400K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1414.3 lumens
Efficiency: N/A
Efficacy: 44.9 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.63
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702537

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF

Luminous Intensity Polar Plot

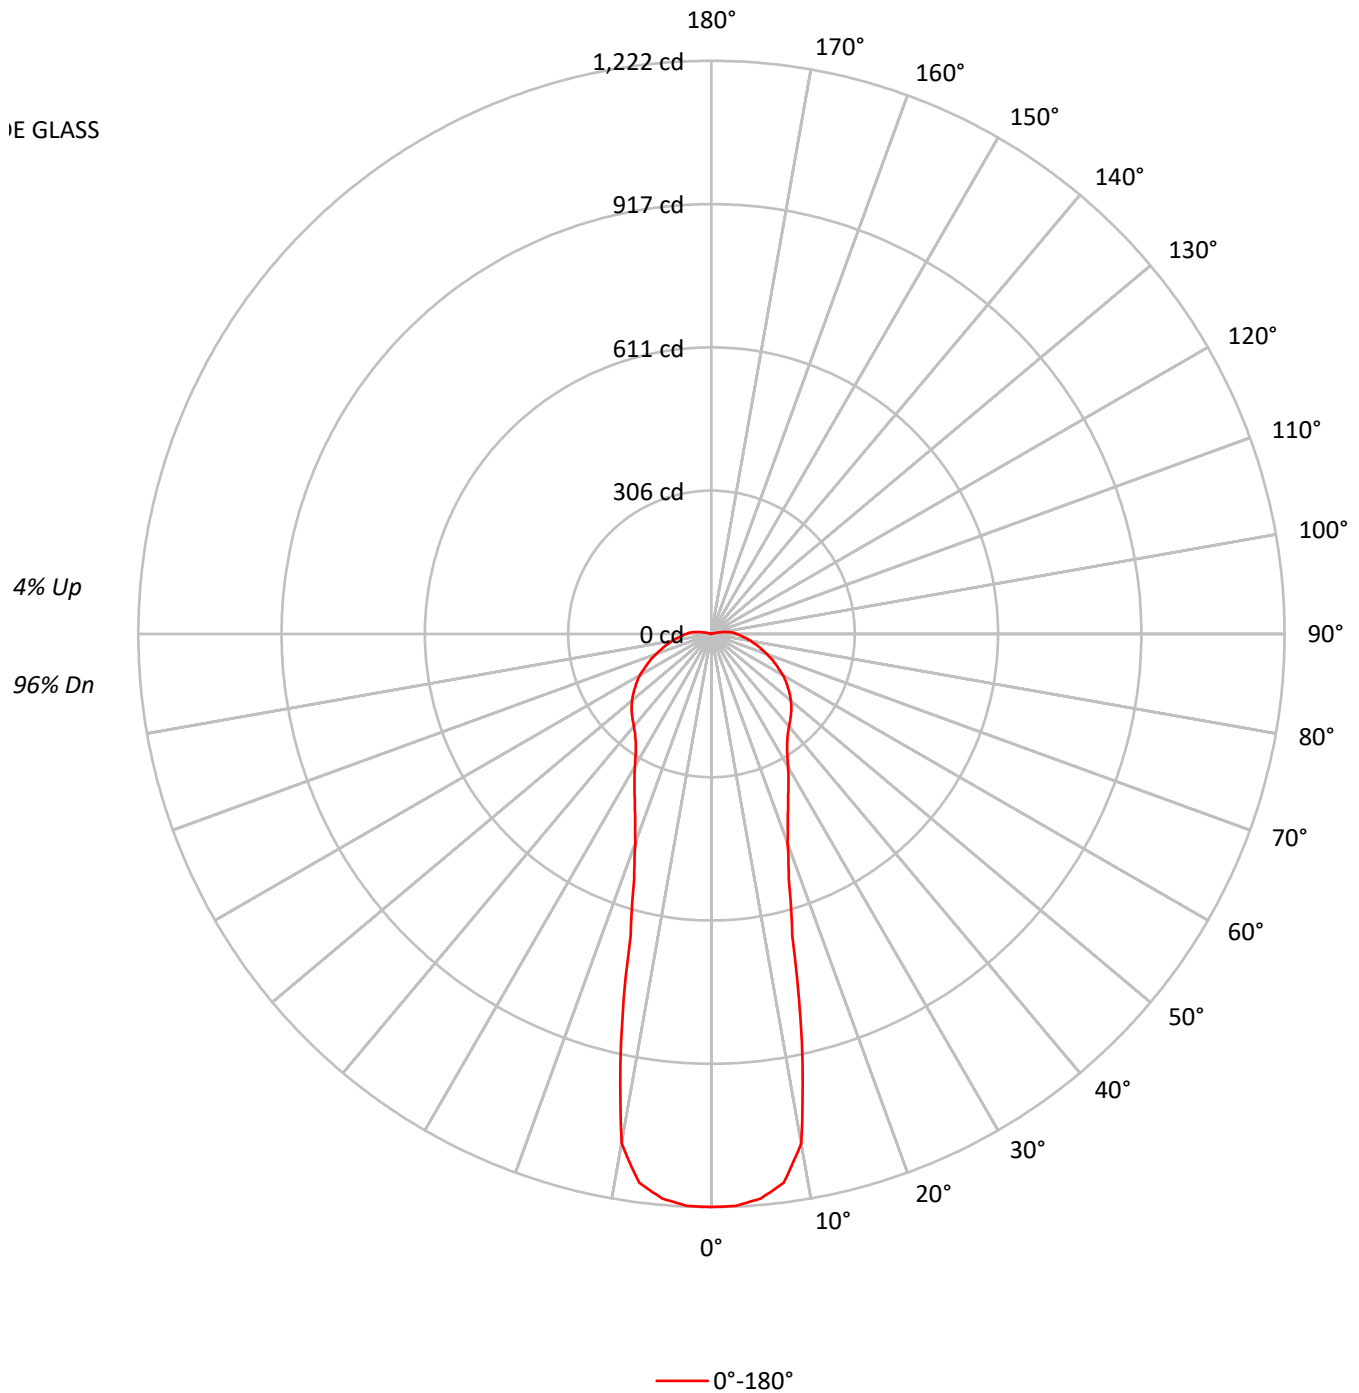

TEST NUMBER: P702537

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	109	109	109		104	104	104		99	99	99	96
1	107	102	97	93	104	99	95	91	94	91	88		90	87	84		85	83	81	79
2	98	89	82	77	95	87	81	75	83	78	73		79	75	71		76	72	69	66
3	90	79	71	65	87	77	70	64	74	68	62		71	65	61		68	63	59	57
4	83	71	63	56	80	70	62	56	67	60	54		64	58	53		61	56	52	50
5	77	65	56	49	75	63	55	49	61	54	48		58	52	47		56	51	47	44
6	72	59	50	44	70	58	50	44	56	49	43		54	47	43		52	46	42	40
7	67	54	46	40	65	53	45	40	51	44	39		50	43	39		48	43	38	36
8	63	50	42	37	61	49	42	36	48	41	36		46	40	36		45	39	35	33
9	60	47	39	34	58	46	39	34	45	38	33		43	37	33		42	37	33	31
10	56	44	36	31	55	43	36	31	42	35	31		41	35	31		40	34	30	29

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	79718
5°	70705
10°	58926
15°	32978
20°	22040
25°	17029
30°	13765
35°	11476
40°	10226
45°	9379
50°	8555
55°	7673
60°	6844
65°	5916
70°	5074
75°	4298
80°	3648
85°	3045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9379 cd/sqm

TEST NUMBER: P702537

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.3	7.9
10°-20°	195.6	13.8
20°-30°	179.4	12.7
30°-40°	178.3	12.6
40°-50°	185.2	13.1
50°-60°	178.1	12.6
60°-70°	148.9	10.5
70°-80°	109.9	7.8
80°-90°	74.3	5.3
90°-100°	43.1	3.0
100°-110°	9.0	0.6
110°-120°	0.2	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	487.3	34.5
0°-40°	665.6	47.1
0°-60°	1028.9	72.7
0°-90°	1362.0	96.3
90°-120°	52.3	3.7
90°-150°	52.3	3.7
90°-180°	52.0	3.7
0°-180°	1414.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1222	
5°	1208	112
15°	666	196
25°	387	179
35°	281	178
45°	240	185
55°	198	178
65°	150	149
75°	104	110
85°	67	59
90°	54	30
95°	41	29
105°	7	9
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702537

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF

CANDELA DISTRIBUTION (FULL):

0°	
0°	1221.9
2.5°	1220.2
5°	1208.1
7.5°	1180.5
10°	1102.8
12.5°	890.5
15°	666.2
17.5°	547.1
20°	474.6
22.5°	424.6
25°	386.6
27.5°	355.5
30°	326.2
32.5°	300.3
35°	281.3
37.5°	267.5
40°	257.1
42.5°	248.5
45°	239.9
47.5°	231.3
50°	220.9
52.5°	210.6
55°	198.5
57.5°	188.1
60°	176.0
62.5°	162.2
65°	150.1
67.5°	138.1
70°	126.0
72.5°	113.9
75°	103.6
77.5°	93.2
80°	84.6
82.5°	75.9
85°	67.3
87.5°	60.4
90°	53.5
92.5°	48.3
95°	41.4
97.5°	31.1
100°	20.7
102.5°	12.1
105°	6.9
107.5°	3.5
110°	1.7

TEST NUMBER: P702537

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9024-4LBW1LI-GFF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)