

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702543

Luminaire Tested: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702543
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-15)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, CLEAR OUTSIDE C
KIT.
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1725.1 lumens
Efficiency: N/A
Efficacy: 54.8 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.74
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702543

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC

Luminous Intensity Polar Plot

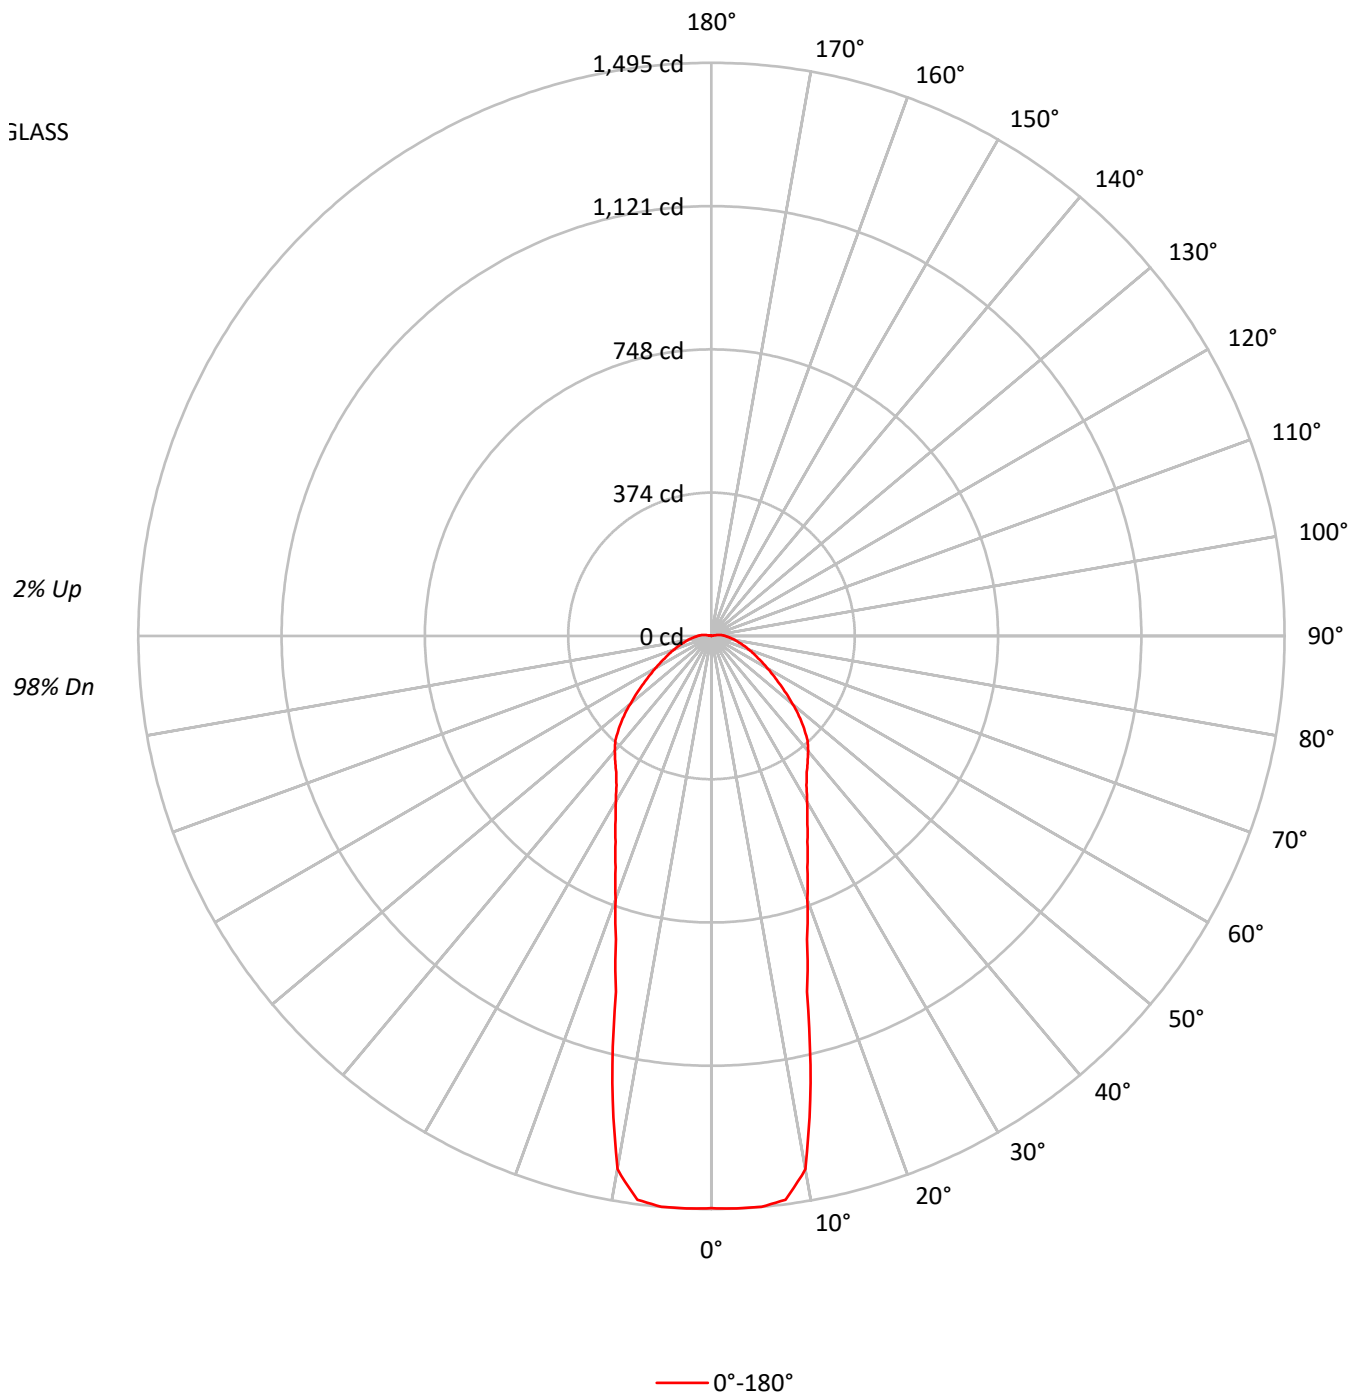

TEST NUMBER: P702543

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	97	106	102	99	96	98	95	92		94	91	89		90	88	86	84
2	101	93	87	82	98	91	86	81	88	83	79		84	80	77		81	78	75	73
3	93	84	76	71	91	82	75	70	79	73	69		76	71	67		73	69	66	64
4	86	76	68	62	84	74	67	61	72	65	60		69	64	60		67	62	59	57
5	81	69	61	55	78	68	60	55	66	59	54		64	58	53		62	57	53	51
6	75	63	55	50	73	62	55	49	60	54	49		59	53	48		57	52	48	46
7	71	58	51	45	69	58	50	45	56	49	44		54	49	44		53	48	44	42
8	66	54	47	41	65	54	46	41	52	46	41		51	45	41		50	44	40	38
9	63	51	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	40	35	58	47	40	35	46	39	35		45	39	35		44	38	35	33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	97398
5°	87485
10°	75469
15°	47582
20°	33980
25°	26095
30°	21027
35°	17684
40°	15603
45°	13343
50°	10712
55°	8342
60°	6560
65°	5179
70°	4188
75°	3336
80°	2708
85°	2131

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13343 cd/sqm

TEST NUMBER: P702543

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	8.1
10°-20°	277.4	16.1
20°-30°	274.9	15.9
30°-40°	273.9	15.9
40°-50°	261.4	15.2
50°-60°	195.1	11.3
60°-70°	132.2	7.7
70°-80°	86.2	5.0
80°-90°	52.4	3.0
90°-100°	27.3	1.6
100°-110°	3.7	0.2
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	692.8	40.2
0°-40°	966.7	56.0
0°-60°	1423.2	82.5
0°-90°	1694.0	98.2
90°-120°	31.0	1.8
90°-150°	31.0	1.8
90°-180°	31.0	1.8
0°-180°	1725.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1493	
5°	1495	141
15°	961	277
25°	592	275
35°	434	274
45°	341	261
55°	216	195
65°	131	132
75°	80	86
85°	47	42
90°	35	20
95°	26	18
105°	2	4
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702543

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC

CANDELA DISTRIBUTION (FULL):

0°	
0°	1492.9
2.5°	1494.8
5°	1494.8
7.5°	1483.1
10°	1412.4
12.5°	1194.7
15°	961.2
17.5°	829.8
20°	731.7
22.5°	653.3
25°	592.4
27.5°	541.4
30°	498.3
32.5°	461.0
35°	433.5
37.5°	412.0
40°	392.3
42.5°	370.8
45°	341.3
47.5°	310.0
50°	276.6
52.5°	245.2
55°	215.8
57.5°	190.3
60°	168.7
62.5°	149.1
65°	131.4
67.5°	117.7
70°	104.0
72.5°	92.2
75°	80.4
77.5°	70.6
80°	62.8
82.5°	54.9
85°	47.1
87.5°	41.2
90°	35.3
92.5°	31.4
95°	25.5
97.5°	19.6
100°	11.8
102.5°	5.9
105°	2.0
107.5°	0.0
110°	0.0

TEST NUMBER: P702543

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9027-4LBW1LI-GFC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)