

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702555

Luminaire Tested: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702555
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-10)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF
Description: FARALLON 6" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1649.8 lumens
Efficiency: N/A
Efficacy: 52.4 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.81
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702555

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF

Luminous Intensity Polar Plot

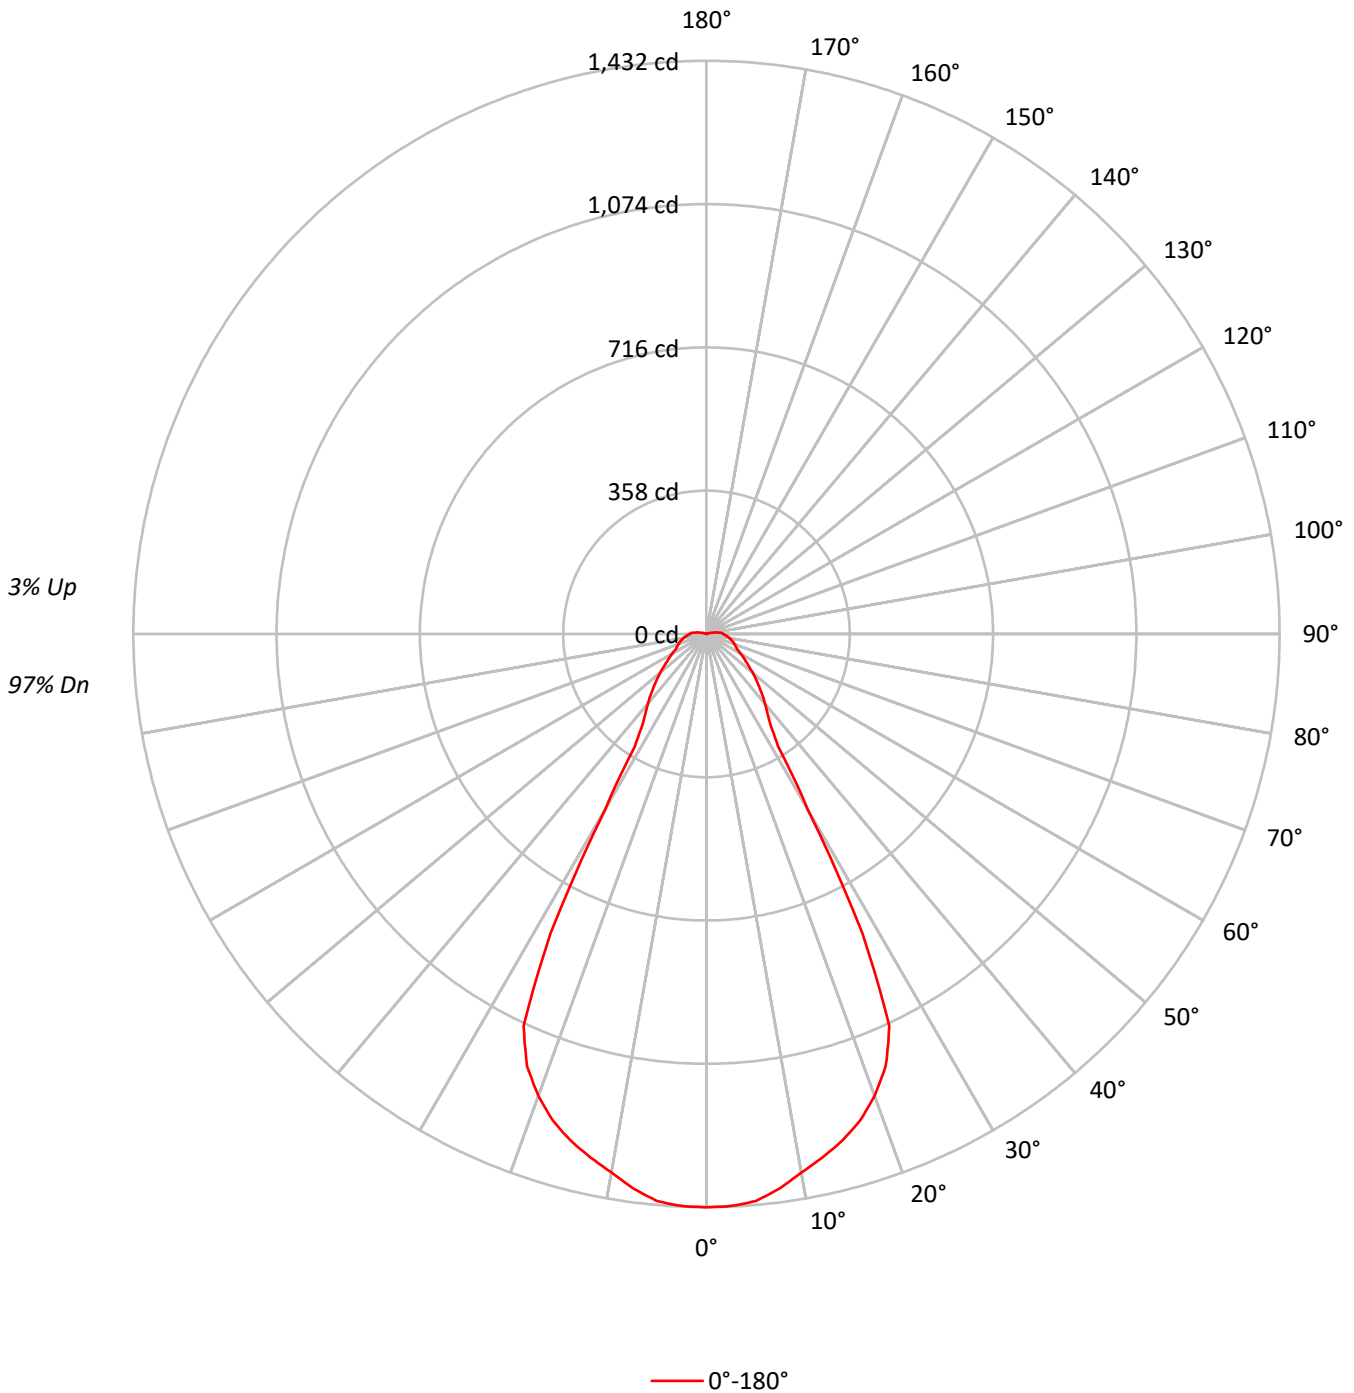

TEST NUMBER: P702555

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	110	110	110		104	104	104		99	99	99	97
1	110	106	102	99	107	103	100	97	99	96	93		94	92	90		90	89	87	85
2	102	96	90	86	100	94	89	84	90	86	82		86	83	80		83	80	78	76
3	96	87	81	76	93	86	80	75	82	77	73		80	75	72		77	73	70	68
4	90	80	73	68	88	79	72	67	76	71	66		74	69	65		71	67	64	62
5	85	74	67	62	83	73	66	61	71	65	61		69	64	60		67	62	59	57
6	80	69	62	57	78	68	61	56	66	60	56		64	59	55		63	58	54	53
7	75	64	57	52	74	64	57	52	62	56	52		60	55	51		59	54	51	49
8	71	60	53	49	70	60	53	48	58	52	48		57	52	48		56	51	47	46
9	68	57	50	45	66	56	50	45	55	49	45		54	48	45		53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42		51	46	42		50	45	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	93457
5°	83236
10°	73011
15°	64878
20°	57023
25°	47621
30°	21373
35°	11386
40°	9045
45°	7272
50°	5844
55°	4635
60°	3857
65°	3260
70°	2996
75°	2742
80°	2497
85°	2244

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7272 cd/sqm

TEST NUMBER: P702555

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.8	8.1
10°-20°	368.2	22.3
20°-30°	449.1	27.2
30°-40°	190.1	11.5
40°-50°	144.2	8.7
50°-60°	109.2	6.6
60°-70°	83.5	5.1
70°-80°	69.9	4.2
80°-90°	54.1	3.3
90°-100°	36.1	2.2
100°-110°	10.8	0.7
110°-120°	0.8	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	951.1	57.6
0°-40°	1141.2	69.2
0°-60°	1394.7	84.5
0°-90°	1602.2	97.1
90°-120°	47.7	2.9
90°-150°	47.7	2.9
90°-180°	48.0	2.9
0°-180°	1649.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1432	
5°	1422	134
15°	1311	368
25°	1081	449
35°	279	190
45°	186	144
55°	120	109
65°	83	83
75°	66	70
85°	50	42
90°	41	23
95°	35	25
105°	8	11
115°	0	1
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702555

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF

CANDELA DISTRIBUTION (FULL):

0°	
0°	1432.5
2.5°	1430.5
5°	1422.2
7.5°	1397.4
10°	1366.4
12.5°	1339.5
15°	1310.6
17.5°	1275.4
20°	1227.9
22.5°	1170.0
25°	1081.1
27.5°	843.4
30°	506.5
32.5°	332.8
35°	279.1
37.5°	250.1
40°	227.4
42.5°	206.7
45°	186.0
47.5°	167.4
50°	150.9
52.5°	134.4
55°	119.9
57.5°	109.6
60°	99.2
62.5°	88.9
65°	82.7
67.5°	78.6
70°	74.4
72.5°	70.3
75°	66.1
77.5°	62.0
80°	57.9
82.5°	53.7
85°	49.6
87.5°	45.5
90°	41.3
92.5°	39.3
95°	35.1
97.5°	26.9
100°	20.7
102.5°	14.5
105°	8.3
107.5°	6.2
110°	2.1

TEST NUMBER: P702555

CATALOG NUMBER: 340-6C-25-D010 / 340-EU4C-3040-9035-4LBW1LI-FF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	2.1
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)