

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702654

Luminaire Tested: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702654
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2699.2 lumens
Efficiency: N/A
Efficacy: 66.8 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702654

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC

Luminous Intensity Polar Plot

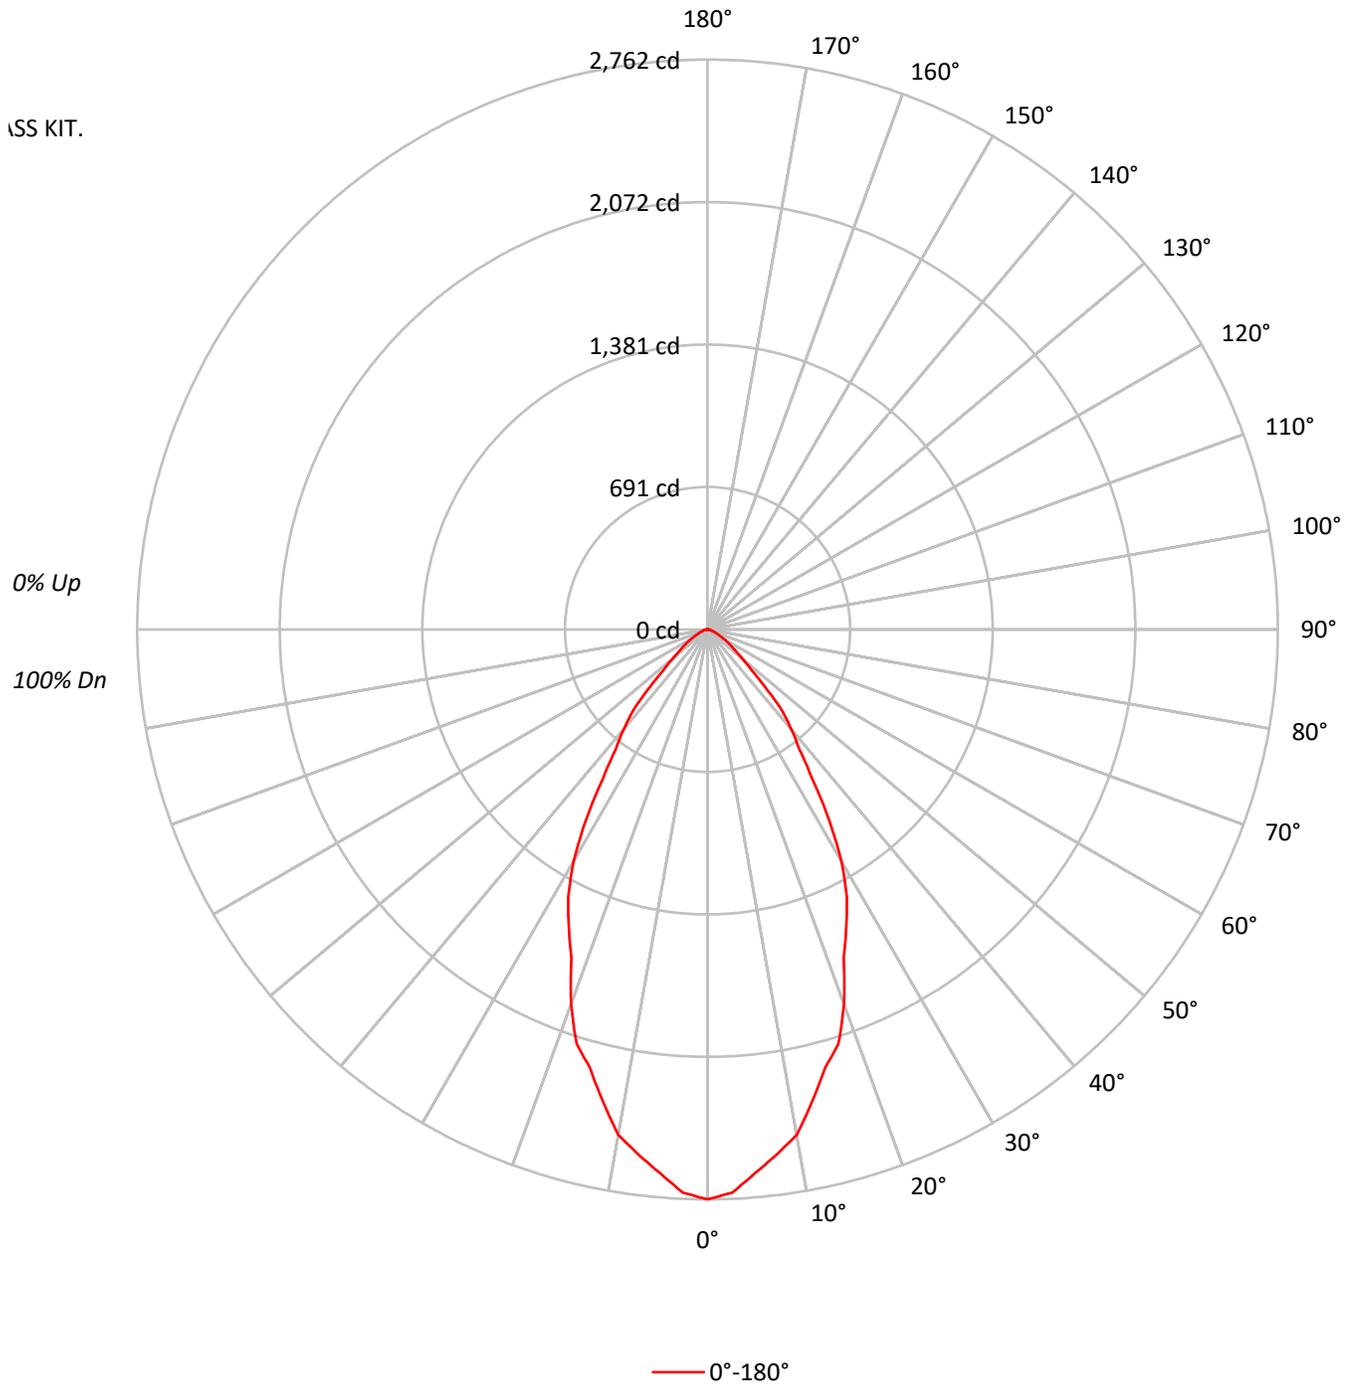

TEST NUMBER: P702654

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	180162
5°	173201
10°	164756
15°	148518
20°	134169
25°	114463
30°	97670
35°	70358
40°	53705
45°	36112
50°	22350
55°	16072
60°	11704
65°	7966
70°	6734
75°	5470
80°	5110
85°	4042

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 36112 cd/sqm

TEST NUMBER: P702654

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	247.7	9.2
10°-20°	620.2	23.0
20°-30°	731.1	27.1
30°-40°	568.4	21.1
40°-50°	311.8	11.6
50°-60°	130.0	4.8
60°-70°	55.0	2.0
70°-80°	23.6	0.9
80°-90°	6.7	0.2
90°-100°	2.9	0.1
100°-110°	1.8	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1599.0	59.2
0°-40°	2167.4	80.3
0°-60°	2609.2	96.7
0°-90°	2694.5	99.8
90°-120°	4.7	0.2
90°-150°	4.7	0.2
90°-180°	5.0	0.2
0°-180°	2699.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2762	
5°	2645	248
15°	2199	620
25°	1590	731
35°	883	568
45°	391	312
55°	141	130
65°	52	55
75°	22	24
85°	5	6
90°	3	1
95°	3	2
105°	3	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702654

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2761.5
2.5°	2731.6
5°	2644.7
7.5°	2565.8
10°	2487.0
12.5°	2343.0
15°	2198.9
17.5°	2106.5
20°	1932.5
22.5°	1723.2
25°	1590.1
27.5°	1459.6
30°	1296.5
32.5°	1098.1
35°	883.4
37.5°	728.4
40°	630.6
42.5°	535.5
45°	391.4
47.5°	282.7
50°	220.2
52.5°	174.0
55°	141.3
57.5°	114.2
60°	89.7
62.5°	65.2
65°	51.6
67.5°	43.5
70°	35.3
72.5°	27.2
75°	21.7
77.5°	16.3
80°	13.6
82.5°	8.2
85°	5.4
87.5°	2.7
90°	2.7
92.5°	2.7
95°	2.7
97.5°	2.7
100°	2.7
102.5°	2.7
105°	2.7
107.5°	0.0
110°	0.0

TEST NUMBER: P702654

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9027-4LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)