

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702685

Luminaire Tested: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702685
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-11)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.
Light Source: 2700K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2493.3 lumens
Efficiency: N/A
Efficacy: 61.7 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.71
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702685

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC

Luminous Intensity Polar Plot

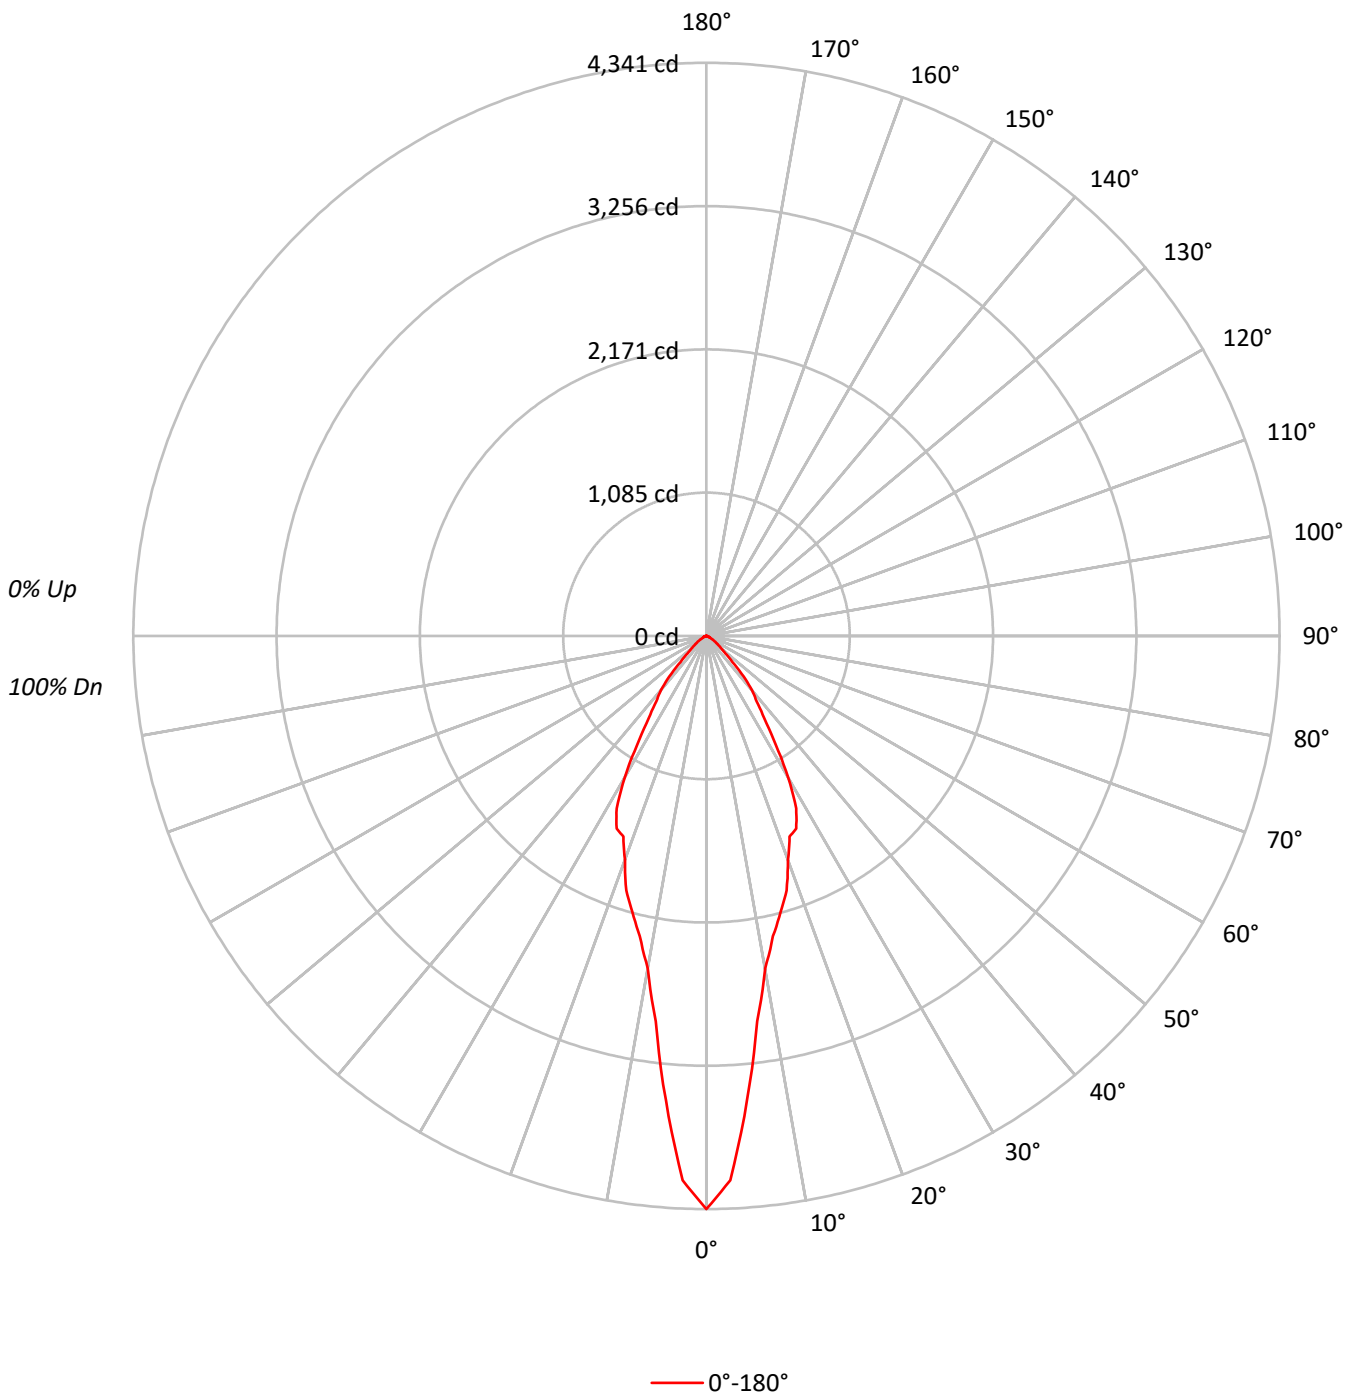

TEST NUMBER: P702685

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | | 50 | 30 | 10 | | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | | 106 | 106 | 106 | | 102 | 102 | 102 | 100 |
| 1 | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 100 | | 100 | 99 | 97 | | 97 | 96 | 94 | 93 |
| 2 | 107 | 102 | 98 | 94 | 105 | 100 | 96 | 93 | 97 | 94 | 91 | | 94 | 91 | 89 | | 91 | 89 | 87 | 85 |
| 3 | 101 | 95 | 89 | 85 | 99 | 93 | 88 | 84 | 90 | 86 | 83 | | 88 | 85 | 82 | | 86 | 83 | 80 | 79 |
| 4 | 96 | 88 | 82 | 78 | 94 | 87 | 81 | 77 | 85 | 80 | 76 | | 83 | 79 | 75 | | 81 | 77 | 74 | 73 |
| 5 | 91 | 82 | 76 | 71 | 89 | 81 | 75 | 71 | 79 | 74 | 70 | | 78 | 73 | 70 | | 76 | 72 | 69 | 68 |
| 6 | 86 | 77 | 71 | 66 | 85 | 76 | 70 | 66 | 74 | 69 | 65 | | 73 | 68 | 65 | | 72 | 68 | 64 | 63 |
| 7 | 82 | 72 | 66 | 61 | 80 | 71 | 65 | 61 | 70 | 65 | 61 | | 69 | 64 | 61 | | 68 | 63 | 60 | 59 |
| 8 | 78 | 68 | 62 | 57 | 76 | 67 | 61 | 57 | 66 | 61 | 57 | | 65 | 60 | 57 | | 64 | 60 | 56 | 55 |
| 9 | 74 | 64 | 58 | 54 | 73 | 63 | 58 | 54 | 62 | 57 | 53 | | 62 | 57 | 53 | | 61 | 56 | 53 | 52 |
| 10 | 70 | 60 | 54 | 50 | 69 | 60 | 54 | 50 | 59 | 54 | 50 | | 58 | 53 | 50 | | 58 | 53 | 50 | 49 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 283190 |
| 5° | 231225 |
| 10° | 169440 |
| 15° | 146316 |
| 20° | 125303 |
| 25° | 115831 |
| 30° | 93368 |
| 35° | 60617 |
| 40° | 45836 |
| 45° | 25576 |
| 50° | 14900 |
| 55° | 9896 |
| 60° | 6733 |
| 65° | 4199 |
| 70° | 3624 |
| 75° | 2748 |
| 80° | 2029 |
| 85° | 2021 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25576 cd/sqm

TEST NUMBER: P702685

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 305.3 | 12.2 |
| 10°-20° | 606.2 | 24.3 |
| 20°-30° | 716.6 | 28.7 |
| 30°-40° | 501.5 | 20.1 |
| 40°-50° | 234.0 | 9.4 |
| 50°-60° | 81.2 | 3.3 |
| 60°-70° | 30.8 | 1.2 |
| 70°-80° | 12.5 | 0.5 |
| 80°-90° | 2.9 | 0.1 |
| 90°-100° | 1.8 | 0.1 |
| 100°-110° | 1.1 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1628.1 | 65.3 |
| 0°-40° | 2129.6 | 85.4 |
| 0°-60° | 2444.8 | 98.1 |
| 0°-90° | 2491.1 | 99.9 |
| 90°-120° | 2.9 | 0.1 |
| 90°-150° | 2.9 | 0.1 |
| 90°-180° | 3.0 | 0.1 |
| 0°-180° | 2493.3 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|------|------|------|
| 0° | 4341 | |
| 5° | 3531 | 305 |
| 15° | 2166 | 606 |
| 25° | 1609 | 717 |
| 35° | 761 | 501 |
| 45° | 277 | 234 |
| 55° | 87 | 81 |
| 65° | 27 | 31 |
| 75° | 11 | 13 |
| 85° | 3 | 3 |
| 90° | 0 | 0 |
| 95° | 0 | 1 |
| 105° | 0 | 1 |
| 115° | 0 | 0 |
| 125° | 0 | 0 |
| 135° | 0 | 0 |
| 145° | 0 | 0 |
| 155° | 0 | 0 |
| 165° | 0 | 0 |
| 175° | 0 | 0 |
| 180° | 0 | 0 |

TEST NUMBER: P702685

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC

CANDELA DISTRIBUTION (FULL):

| 0° | |
|--------|--------|
| 0° | 4340.7 |
| 2.5° | 4126.0 |
| 5° | 3530.7 |
| 7.5° | 2943.6 |
| 10° | 2557.7 |
| 12.5° | 2329.4 |
| 15° | 2166.3 |
| 17.5° | 2019.5 |
| 20° | 1804.8 |
| 22.5° | 1644.4 |
| 25° | 1609.1 |
| 27.5° | 1473.2 |
| 30° | 1239.4 |
| 32.5° | 975.8 |
| 35° | 761.1 |
| 37.5° | 622.4 |
| 40° | 538.2 |
| 42.5° | 418.6 |
| 45° | 277.2 |
| 47.5° | 193.0 |
| 50° | 146.8 |
| 52.5° | 111.4 |
| 55° | 87.0 |
| 57.5° | 68.0 |
| 60° | 51.6 |
| 62.5° | 38.1 |
| 65° | 27.2 |
| 67.5° | 24.5 |
| 70° | 19.0 |
| 72.5° | 16.3 |
| 75° | 10.9 |
| 77.5° | 8.2 |
| 80° | 5.4 |
| 82.5° | 2.7 |
| 85° | 2.7 |
| 87.5° | 2.7 |
| 90° | 0.0 |
| 92.5° | 0.0 |
| 95° | 0.0 |
| 97.5° | 2.7 |
| 100° | 2.7 |
| 102.5° | 2.7 |
| 105° | 0.0 |
| 107.5° | 0.0 |
| 110° | 0.0 |

TEST NUMBER: P702685

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-CC

CANDELA DISTRIBUTION (continued):

| | 0° |
|--------|-----|
| 112.5° | 0.0 |
| 115° | 0.0 |
| 117.5° | 0.0 |
| 120° | 0.0 |
| 122.5° | 0.0 |
| 125° | 0.0 |
| 127.5° | 0.0 |
| 130° | 0.0 |
| 132.5° | 0.0 |
| 135° | 0.0 |
| 137.5° | 0.0 |
| 140° | 0.0 |
| 142.5° | 0.0 |
| 145° | 0.0 |
| 147.5° | 0.0 |
| 150° | 0.0 |
| 152.5° | 0.0 |
| 155° | 0.0 |
| 157.5° | 0.0 |
| 160° | 0.0 |
| 162.5° | 0.0 |
| 165° | 0.0 |
| 167.5° | 0.0 |
| 170° | 0.0 |
| 172.5° | 0.0 |
| 175° | 0.0 |
| 177.5° | 0.0 |
| 180° | 0.0 |

(END OF REPORT)