

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702689

Luminaire Tested: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P702689  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA  
Light Source: 2700K CCT, 97 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2699.2 lumens  
Efficiency: N/A  
Efficacy: 66.8 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 40.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P702689

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

### Luminous Intensity Polar Plot

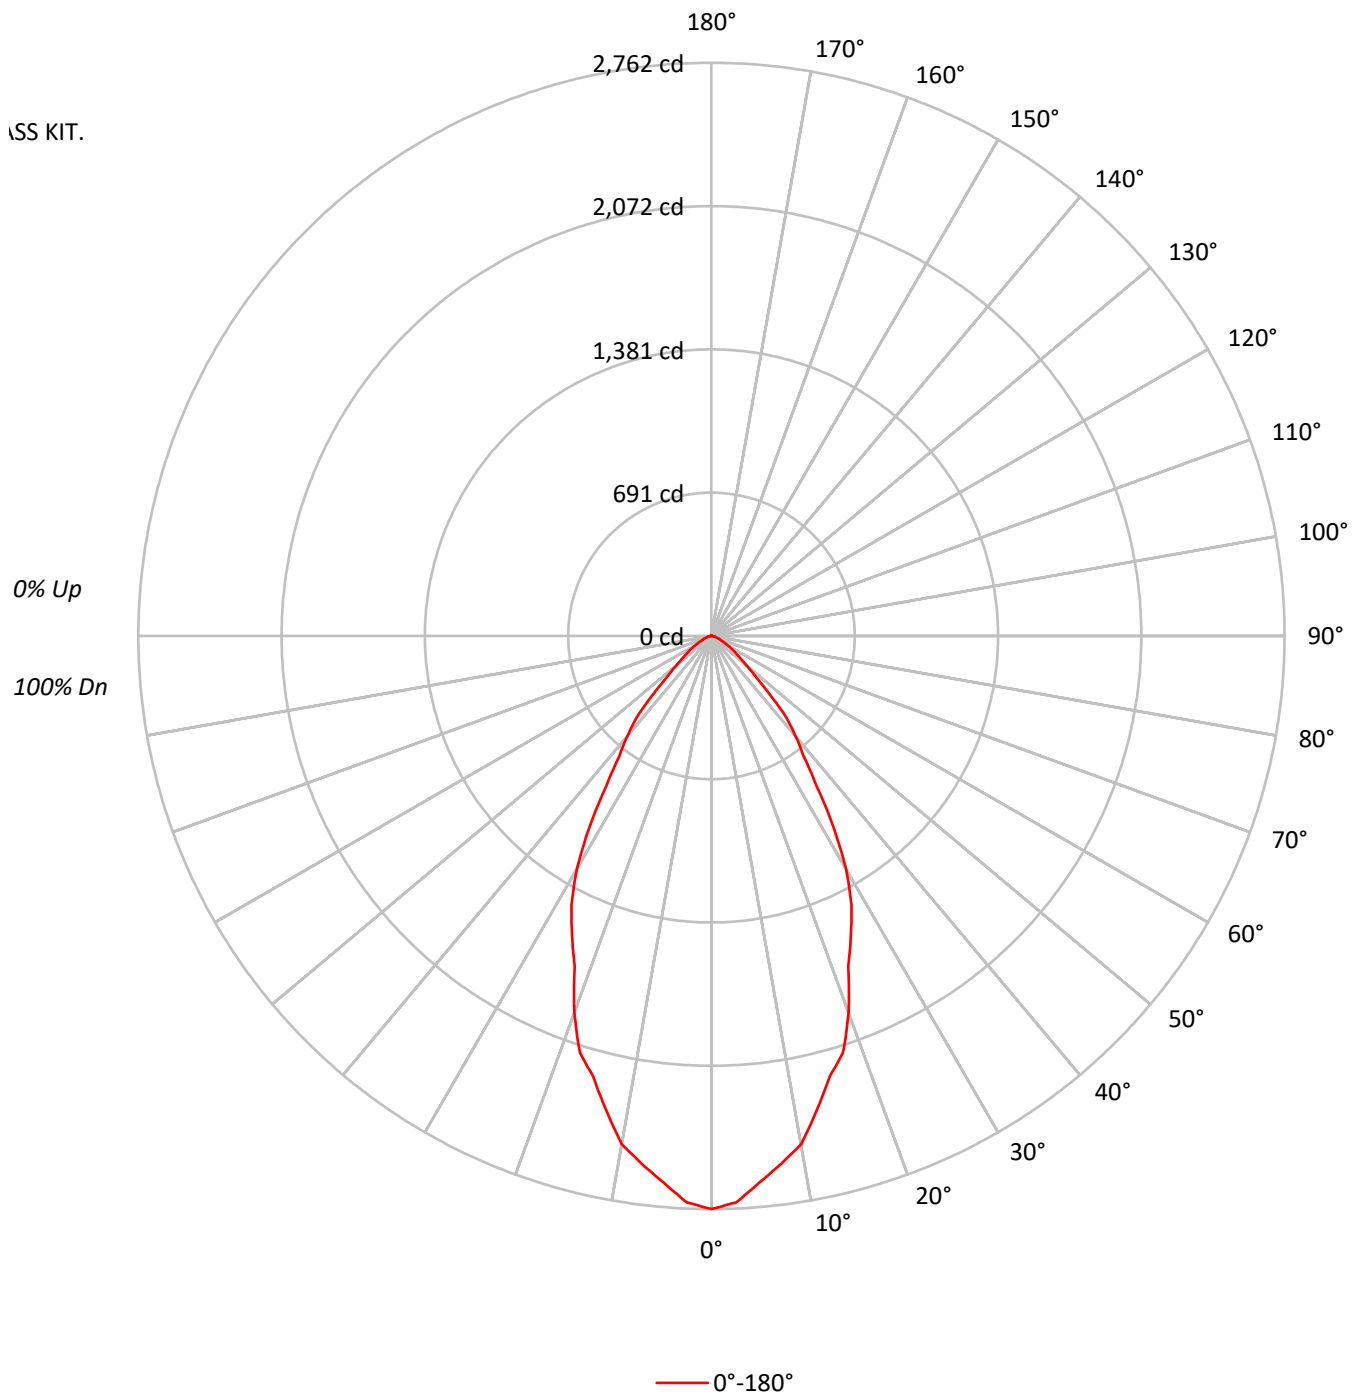

TEST NUMBER: P702689

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  | 0   |     |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 113 | 109 | 107 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99  |  | 99  | 98  | 96  |  | 96  | 95  | 93  | 92  |
| 2   | 106 | 101 | 96  | 92  | 104 | 99  | 95  | 91  | 95  | 92  | 89  |  | 92  | 90  | 87  |  | 90  | 87  | 85  | 83  |
| 3   | 100 | 93  | 87  | 83  | 98  | 91  | 86  | 82  | 88  | 84  | 81  |  | 86  | 82  | 79  |  | 84  | 81  | 78  | 76  |
| 4   | 94  | 86  | 79  | 75  | 92  | 84  | 79  | 74  | 82  | 77  | 73  |  | 80  | 76  | 72  |  | 78  | 74  | 71  | 70  |
| 5   | 89  | 79  | 73  | 68  | 87  | 78  | 72  | 68  | 76  | 71  | 67  |  | 75  | 70  | 66  |  | 73  | 69  | 66  | 64  |
| 6   | 84  | 74  | 67  | 62  | 82  | 73  | 67  | 62  | 71  | 66  | 62  |  | 70  | 65  | 61  |  | 69  | 64  | 61  | 59  |
| 7   | 79  | 69  | 62  | 58  | 78  | 68  | 62  | 57  | 67  | 61  | 57  |  | 66  | 60  | 57  |  | 64  | 60  | 56  | 55  |
| 8   | 75  | 64  | 58  | 53  | 74  | 64  | 58  | 53  | 63  | 57  | 53  |  | 62  | 56  | 53  |  | 61  | 56  | 52  | 51  |
| 9   | 71  | 60  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 53  | 49  |  | 58  | 53  | 49  |  | 57  | 52  | 49  | 48  |
| 10  | 67  | 57  | 51  | 46  | 66  | 56  | 50  | 46  | 56  | 50  | 46  |  | 55  | 50  | 46  |  | 54  | 49  | 46  | 44  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 180162 |
| 5°  | 173201 |
| 10° | 164756 |
| 15° | 148518 |
| 20° | 134169 |
| 25° | 114463 |
| 30° | 97670  |
| 35° | 70358  |
| 40° | 53705  |
| 45° | 36112  |
| 50° | 22350  |
| 55° | 16072  |
| 60° | 11704  |
| 65° | 7966   |
| 70° | 6734   |
| 75° | 5470   |
| 80° | 5110   |
| 85° | 4042   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 36112 cd/sqm

TEST NUMBER: P702689

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 247.7  | 9.2       |
| 10°-20°   | 620.2  | 23.0      |
| 20°-30°   | 731.1  | 27.1      |
| 30°-40°   | 568.4  | 21.1      |
| 40°-50°   | 311.8  | 11.6      |
| 50°-60°   | 130.0  | 4.8       |
| 60°-70°   | 55.0   | 2.0       |
| 70°-80°   | 23.6   | 0.9       |
| 80°-90°   | 6.7    | 0.2       |
| 90°-100°  | 2.9    | 0.1       |
| 100°-110° | 1.8    | 0.1       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1599.0 | 59.2      |
| 0°-40°    | 2167.4 | 80.3      |
| 0°-60°    | 2609.2 | 96.7      |
| 0°-90°    | 2694.5 | 99.8      |
| 90°-120°  | 4.7    | 0.2       |
| 90°-150°  | 4.7    | 0.2       |
| 90°-180°  | 5.0    | 0.2       |
| 0°-180°   | 2699.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | Flux |
|------|------|------|
| 0°   | 2762 |      |
| 5°   | 2645 | 248  |
| 15°  | 2199 | 620  |
| 25°  | 1590 | 731  |
| 35°  | 883  | 568  |
| 45°  | 391  | 312  |
| 55°  | 141  | 130  |
| 65°  | 52   | 55   |
| 75°  | 22   | 24   |
| 85°  | 5    | 6    |
| 90°  | 3    | 1    |
| 95°  | 3    | 2    |
| 105° | 3    | 2    |
| 115° | 0    | 0    |
| 125° | 0    | 0    |
| 135° | 0    | 0    |
| 145° | 0    | 0    |
| 155° | 0    | 0    |
| 165° | 0    | 0    |
| 175° | 0    | 0    |
| 180° | 0    | 0    |

TEST NUMBER: P702689

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

**CANDELA DISTRIBUTION (FULL):**

| 0°     |        |
|--------|--------|
| 0°     | 2761.5 |
| 2.5°   | 2731.6 |
| 5°     | 2644.7 |
| 7.5°   | 2565.8 |
| 10°    | 2487.0 |
| 12.5°  | 2343.0 |
| 15°    | 2198.9 |
| 17.5°  | 2106.5 |
| 20°    | 1932.5 |
| 22.5°  | 1723.2 |
| 25°    | 1590.1 |
| 27.5°  | 1459.6 |
| 30°    | 1296.5 |
| 32.5°  | 1098.1 |
| 35°    | 883.4  |
| 37.5°  | 728.4  |
| 40°    | 630.6  |
| 42.5°  | 535.5  |
| 45°    | 391.4  |
| 47.5°  | 282.7  |
| 50°    | 220.2  |
| 52.5°  | 174.0  |
| 55°    | 141.3  |
| 57.5°  | 114.2  |
| 60°    | 89.7   |
| 62.5°  | 65.2   |
| 65°    | 51.6   |
| 67.5°  | 43.5   |
| 70°    | 35.3   |
| 72.5°  | 27.2   |
| 75°    | 21.7   |
| 77.5°  | 16.3   |
| 80°    | 13.6   |
| 82.5°  | 8.2    |
| 85°    | 5.4    |
| 87.5°  | 2.7    |
| 90°    | 2.7    |
| 92.5°  | 2.7    |
| 95°    | 2.7    |
| 97.5°  | 2.7    |
| 100°   | 2.7    |
| 102.5° | 2.7    |
| 105°   | 2.7    |
| 107.5° | 0.0    |
| 110°   | 0.0    |

TEST NUMBER: P702689

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

**CANDELA DISTRIBUTION (continued):**

|        | 0°  |
|--------|-----|
| 112.5° | 0.0 |
| 115°   | 0.0 |
| 117.5° | 0.0 |
| 120°   | 0.0 |
| 122.5° | 0.0 |
| 125°   | 0.0 |
| 127.5° | 0.0 |
| 130°   | 0.0 |
| 132.5° | 0.0 |
| 135°   | 0.0 |
| 137.5° | 0.0 |
| 140°   | 0.0 |
| 142.5° | 0.0 |
| 145°   | 0.0 |
| 147.5° | 0.0 |
| 150°   | 0.0 |
| 152.5° | 0.0 |
| 155°   | 0.0 |
| 157.5° | 0.0 |
| 160°   | 0.0 |
| 162.5° | 0.0 |
| 165°   | 0.0 |
| 167.5° | 0.0 |
| 170°   | 0.0 |
| 172.5° | 0.0 |
| 175°   | 0.0 |
| 177.5° | 0.0 |
| 180°   | 0.0 |

(END OF REPORT)