

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702657

Luminaire Tested: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702657
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-11)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2592.5 lumens
Efficiency: N/A
Efficacy: 64.2 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.71
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702657

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC

Luminous Intensity Polar Plot

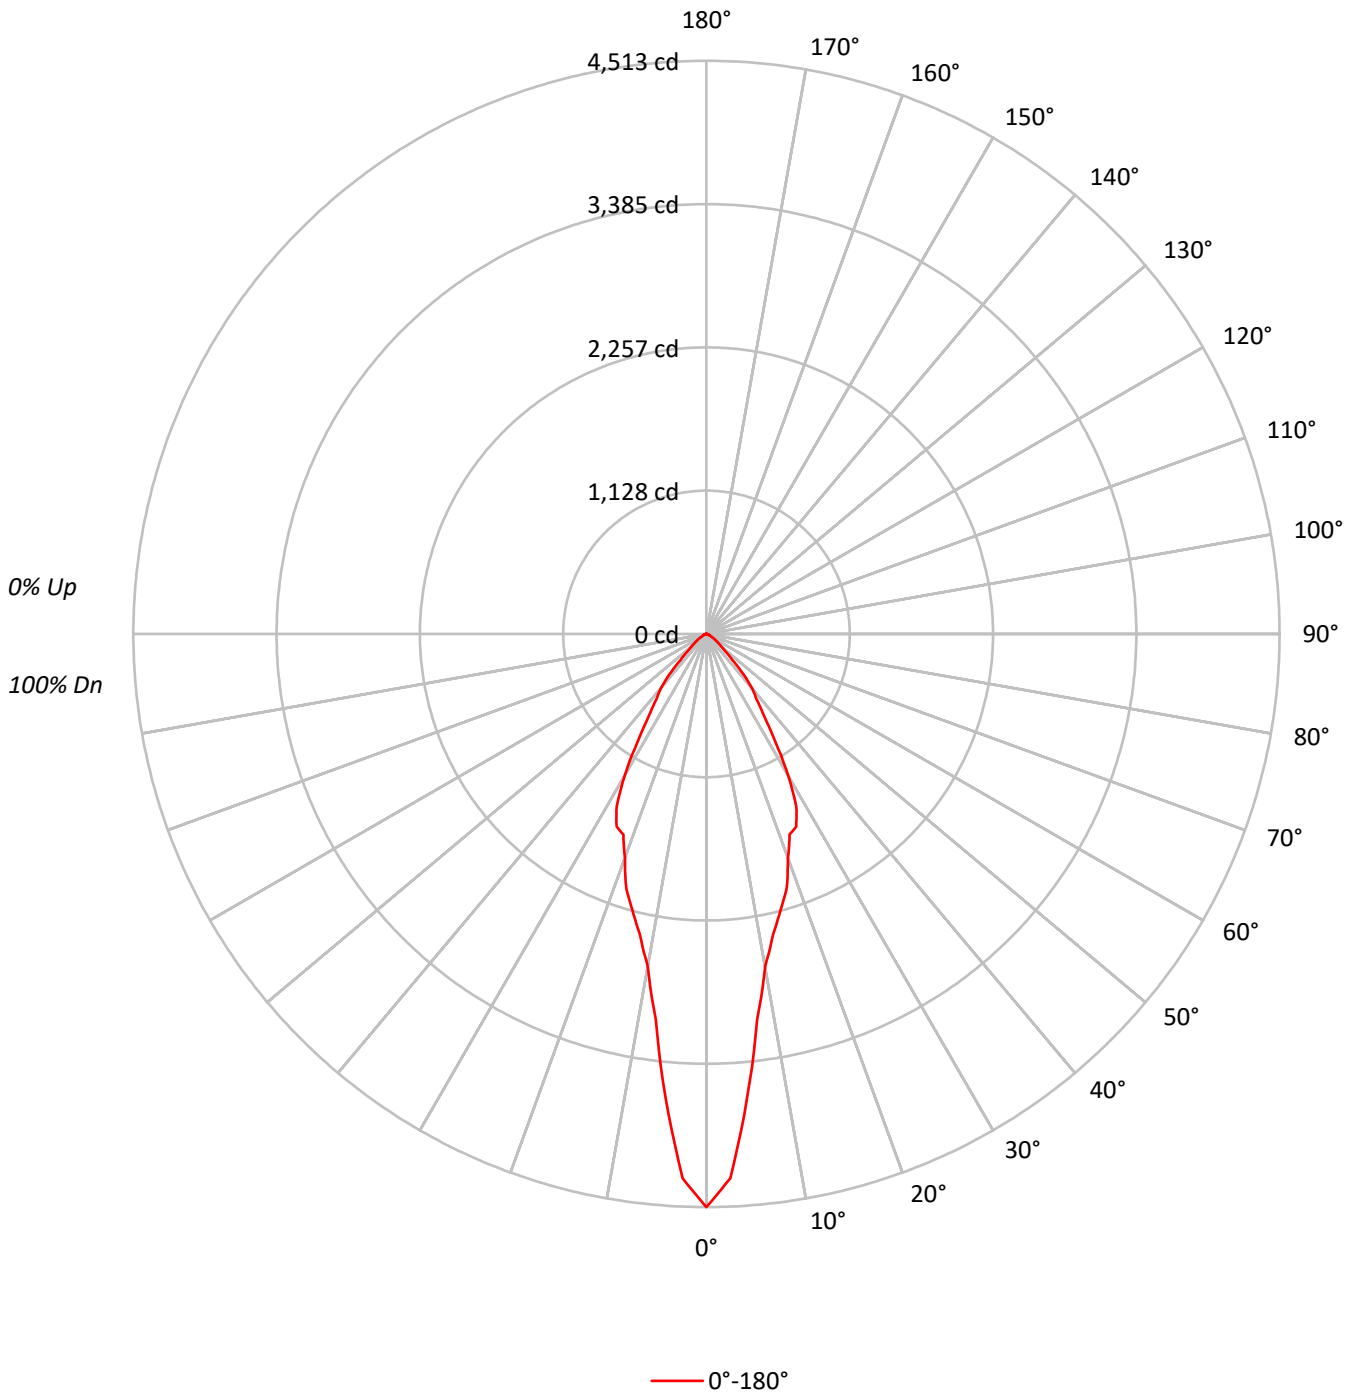

TEST NUMBER: P702657

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97	96	94	93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		86	83	80	79
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81	77	74	73
5	91	82	76	71	89	81	75	71	79	74	70		78	73	70		76	72	69	68
6	86	77	71	66	85	76	70	66	74	69	65		73	68	65		72	68	64	63
7	82	72	66	61	80	71	65	61	70	65	61		69	64	61		68	63	60	59
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64	60	56	55
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61	56	53	52
10	70	60	54	50	69	60	54	50	59	54	50		58	53	50		58	53	50	49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	294451
5°	240426
10°	176177
15°	152132
20°	130288
25°	120438
30°	97082
35°	63022
40°	47659
45°	26600
50°	15488
55°	10282
60°	7007
65°	4369
70°	3777
75°	2848
80°	2142
85°	2096

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26600 cd/sqm

TEST NUMBER: P702657

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	317.4	12.2
10°-20°	630.3	24.3
20°-30°	745.2	28.7
30°-40°	521.4	20.1
40°-50°	243.3	9.4
50°-60°	84.4	3.3
60°-70°	32.1	1.2
70°-80°	13.0	0.5
80°-90°	3.1	0.1
90°-100°	1.9	0.1
100°-110°	1.1	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1692.9	65.3
0°-40°	2214.3	85.4
0°-60°	2542.0	98.1
0°-90°	2590.2	99.9
90°-120°	3.0	0.1
90°-150°	3.0	0.1
90°-180°	3.0	0.1
0°-180°	2592.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4513	
5°	3671	317
15°	2252	630
25°	1673	745
35°	791	521
45°	288	243
55°	90	84
65°	28	32
75°	11	13
85°	3	3
90°	0	0
95°	0	1
105°	0	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702657

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC

CANDELA DISTRIBUTION (FULL):

0°	
0°	4513.3
2.5°	4290.1
5°	3671.2
7.5°	3060.7
10°	2659.4
12.5°	2422.0
15°	2252.4
17.5°	2099.8
20°	1876.6
22.5°	1709.8
25°	1673.1
27.5°	1531.8
30°	1288.7
32.5°	1014.6
35°	791.3
37.5°	647.2
40°	559.6
42.5°	435.2
45°	288.3
47.5°	200.7
50°	152.6
52.5°	115.9
55°	90.4
57.5°	70.7
60°	53.7
62.5°	39.6
65°	28.3
67.5°	25.4
70°	19.8
72.5°	17.0
75°	11.3
77.5°	8.5
80°	5.7
82.5°	2.8
85°	2.8
87.5°	2.8
90°	0.0
92.5°	0.0
95°	0.0
97.5°	2.8
100°	2.8
102.5°	2.8
105°	0.0
107.5°	0.0
110°	0.0

TEST NUMBER: P702657

CATALOG NUMBER: 340-6C-35-D010 / 340-EU4C-3040-9030-4LBW1LI-CC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)