

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702745

Luminaire Tested: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702745
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA
Light Source: 2700K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3130.6 lumens
Efficiency: N/A
Efficacy: 66.6 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702745

CATALOG NUMBER: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

Luminous Intensity Polar Plot

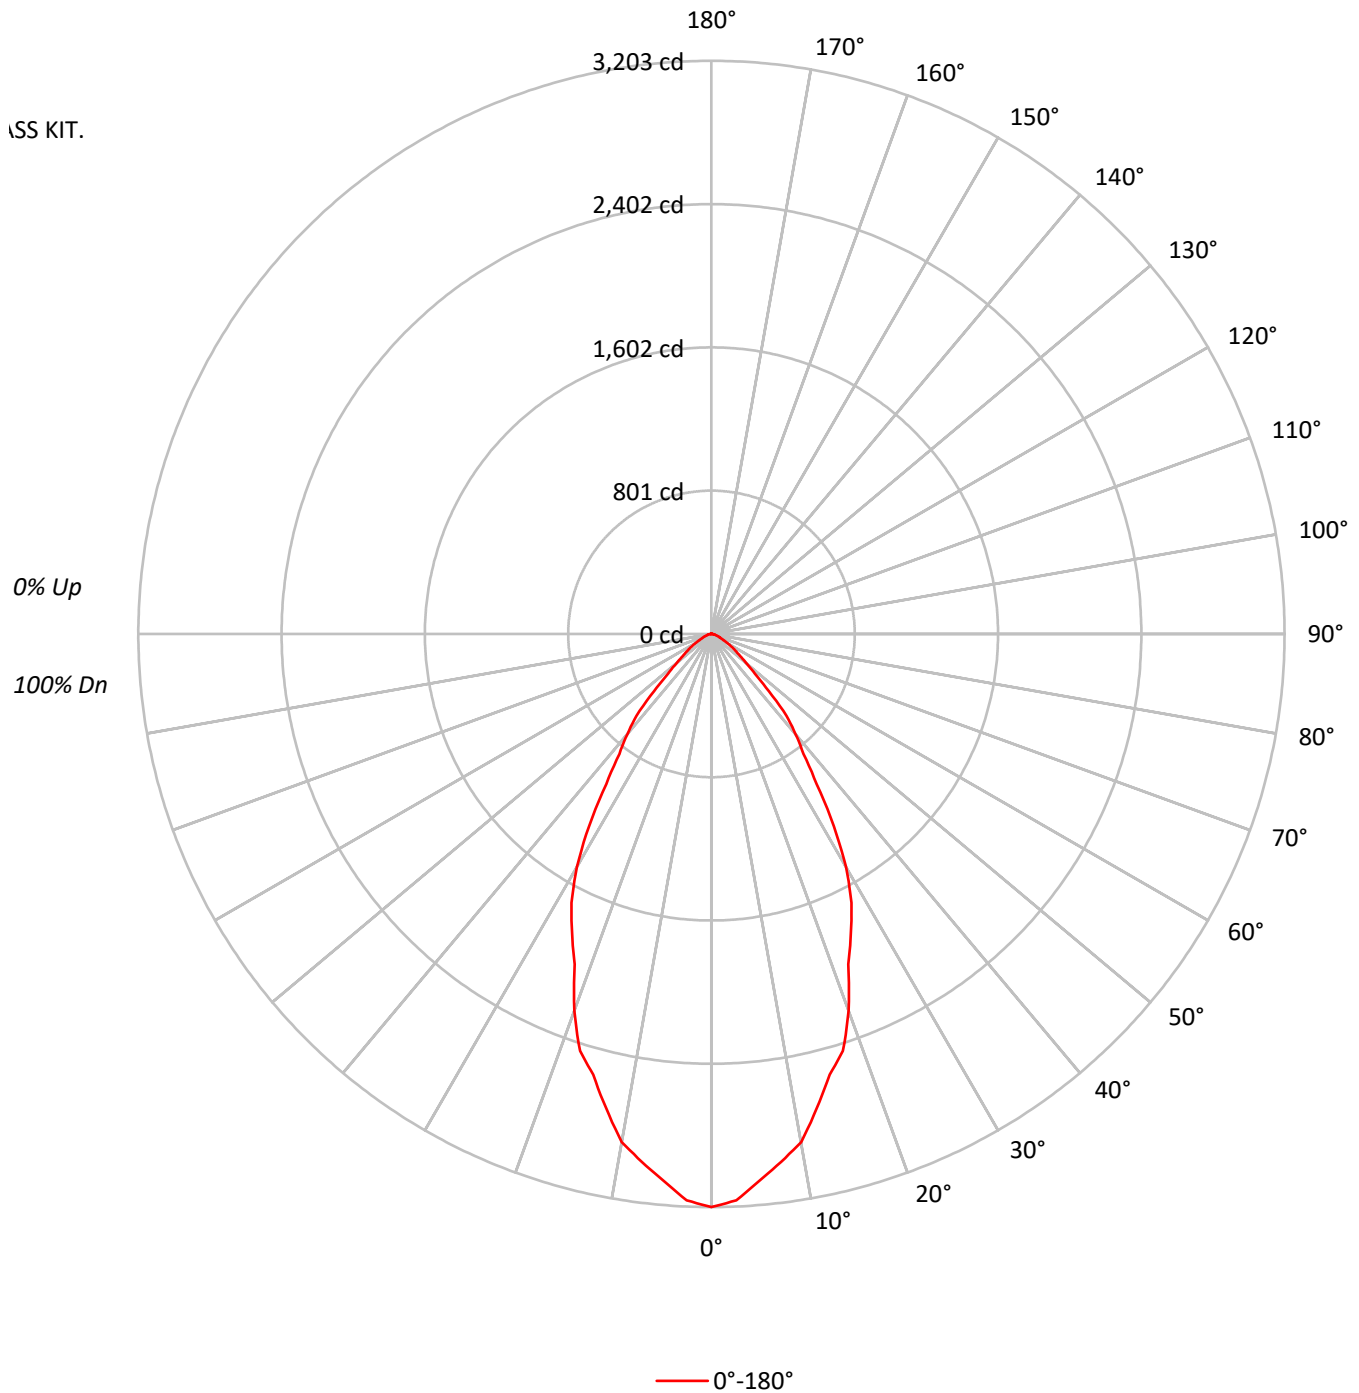

TEST NUMBER: P702745

CATALOG NUMBER: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	208946
5°	200870
10°	191076
15°	172246
20°	155608
25°	132748
30°	113271
35°	81595
40°	62282
45°	41879
50°	25912
55°	18643
60°	13570
65°	9247
70°	7821
75°	6352
80°	5936
85°	4716

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 41879 cd/sqm

TEST NUMBER: P702745

CATALOG NUMBER: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	287.3	9.2
10°-20°	719.3	23.0
20°-30°	847.9	27.1
30°-40°	659.2	21.1
40°-50°	361.6	11.6
50°-60°	150.7	4.8
60°-70°	63.8	2.0
70°-80°	27.4	0.9
80°-90°	7.8	0.2
90°-100°	3.5	0.1
100°-110°	2.1	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1854.5	59.2
0°-40°	2513.7	80.3
0°-60°	3026.0	96.7
0°-90°	3125.0	99.8
90°-120°	5.6	0.2
90°-150°	5.6	0.2
90°-180°	6.0	0.2
0°-180°	3130.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3203	
5°	3067	287
15°	2550	719
25°	1844	848
35°	1024	659
45°	454	362
55°	164	151
65°	60	64
75°	25	27
85°	6	7
90°	3	2
95°	3	3
105°	3	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702745

CATALOG NUMBER: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	3202.7
2.5°	3168.0
5°	3067.2
7.5°	2975.7
10°	2884.3
12.5°	2717.3
15°	2550.2
17.5°	2443.0
20°	2241.3
22.5°	1998.5
25°	1844.1
27.5°	1692.8
30°	1503.6
32.5°	1273.5
35°	1024.5
37.5°	844.8
40°	731.3
42.5°	621.0
45°	453.9
47.5°	327.8
50°	255.3
52.5°	201.7
55°	163.9
57.5°	132.4
60°	104.0
62.5°	75.7
65°	59.9
67.5°	50.4
70°	41.0
72.5°	31.5
75°	25.2
77.5°	18.9
80°	15.8
82.5°	9.5
85°	6.3
87.5°	3.2
90°	3.2
92.5°	3.2
95°	3.2
97.5°	3.2
100°	3.2
102.5°	3.2
105°	3.2
107.5°	0.0
110°	0.0

TEST NUMBER: P702745

CATALOG NUMBER: 340-6C-40-D010 / 340-EU4C-3040-9727-4LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)