

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702270

Luminaire Tested: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC

Issue Date: 8/30/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P702270  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/30/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, CLEAR OUTSIDE C  
KIT.  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 469.0 lumens  
Efficiency: N/A  
Efficacy: 65.1 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.74  
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P702270

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC

### Luminous Intensity Polar Plot

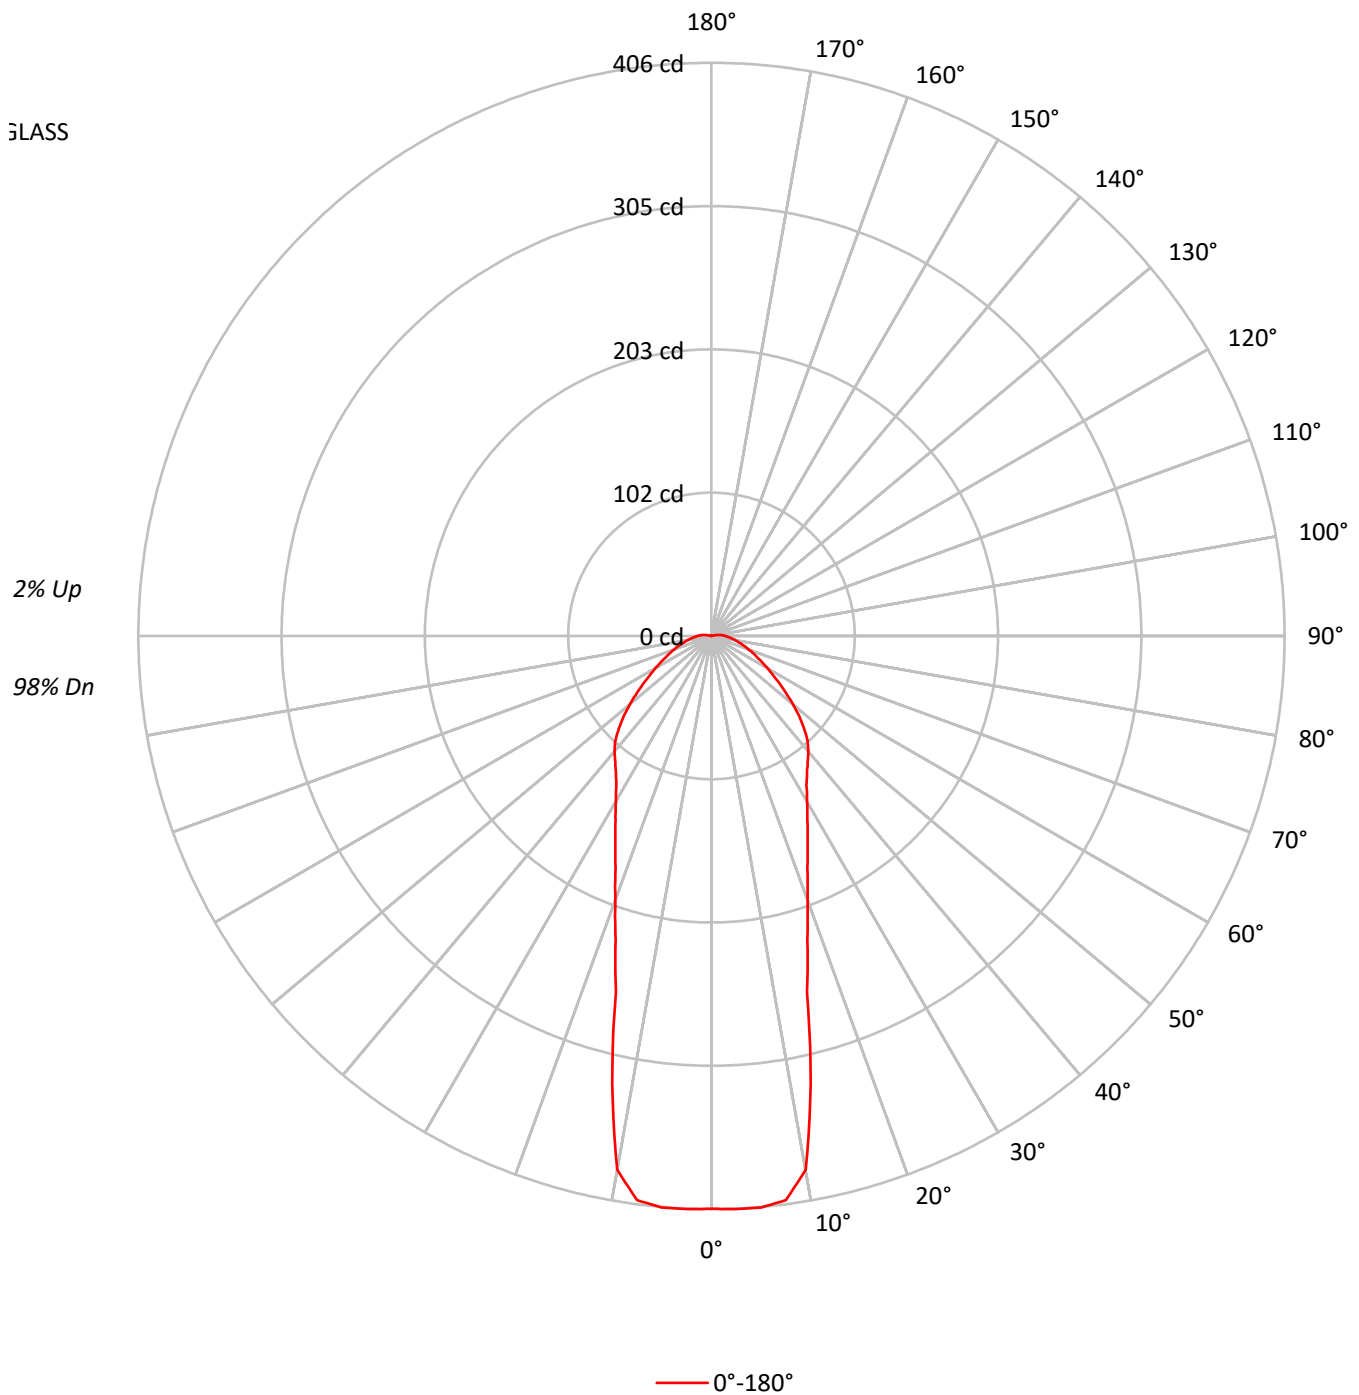

TEST NUMBER: P702270

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	97	106	102	99	96	98	95	92		94	91	89		90	88	86	84
2	101	93	87	82	98	91	86	81	88	83	79		84	80	77		81	78	75	73
3	93	84	76	71	91	82	75	70	79	73	69		76	71	67		73	69	66	64
4	86	76	68	62	84	74	67	61	72	65	60		69	64	60		67	62	59	57
5	81	69	61	55	78	68	60	55	66	59	54		64	58	53		62	57	53	51
6	75	63	55	50	73	62	55	49	60	54	49		59	53	48		57	52	48	46
7	71	58	51	45	69	58	50	45	56	49	44		54	49	44		53	48	44	42
8	66	54	47	41	65	54	46	41	52	46	41		51	45	41		50	44	40	38
9	63	51	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	40	35	58	47	40	35	46	39	35		45	39	35		44	38	35	33

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	26475
5°	23779
10°	20513
15°	12935
20°	9237
25°	7092
30°	5714
35°	4810
40°	4244
45°	3628
50°	2912
55°	2269
60°	1785
65°	1407
70°	1140
75°	909
80°	737
85°	579

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3628 cd/sqm

TEST NUMBER: P702270

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	38.2	8.1
10°-20°	75.4	16.1
20°-30°	74.7	15.9
30°-40°	74.5	15.9
40°-50°	71.1	15.2
50°-60°	53.0	11.3
60°-70°	35.9	7.7
70°-80°	23.5	5.0
80°-90°	14.2	3.0
90°-100°	7.4	1.6
100°-110°	1.0	0.2
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	188.3	40.2
0°-40°	262.8	56.0
0°-60°	386.9	82.5
0°-90°	460.6	98.2
90°-120°	8.4	1.8
90°-150°	8.4	1.8
90°-180°	8.0	1.7
0°-180°	469.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	406	
5°	406	38
15°	261	75
25°	161	75
35°	118	74
45°	93	71
55°	59	53
65°	36	36
75°	22	23
85°	13	11
90°	10	5
95°	7	5
105°	0	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702270

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	405.8
2.5°	406.3
5°	406.3
7.5°	403.1
10°	383.9
12.5°	324.8
15°	261.3
17.5°	225.6
20°	198.9
22.5°	177.6
25°	161.0
27.5°	147.2
30°	135.4
32.5°	125.3
35°	117.9
37.5°	112.0
40°	106.7
42.5°	100.8
45°	92.8
47.5°	84.3
50°	75.2
52.5°	66.7
55°	58.7
57.5°	51.7
60°	45.9
62.5°	40.5
65°	35.7
67.5°	32.0
70°	28.3
72.5°	25.1
75°	21.9
77.5°	19.2
80°	17.1
82.5°	14.9
85°	12.8
87.5°	11.2
90°	9.6
92.5°	8.5
95°	6.9
97.5°	5.3
100°	3.2
102.5°	1.6
105°	0.5
107.5°	0.0
110°	0.0

TEST NUMBER: P702270

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9030-4LBW1LI-GFC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)