

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702275

Luminaire Tested: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702275
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-10)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF
Description: FARALLON 6" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 430.9 lumens
Efficiency: N/A
Efficacy: 59.8 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.81
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702275

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF

Luminous Intensity Polar Plot

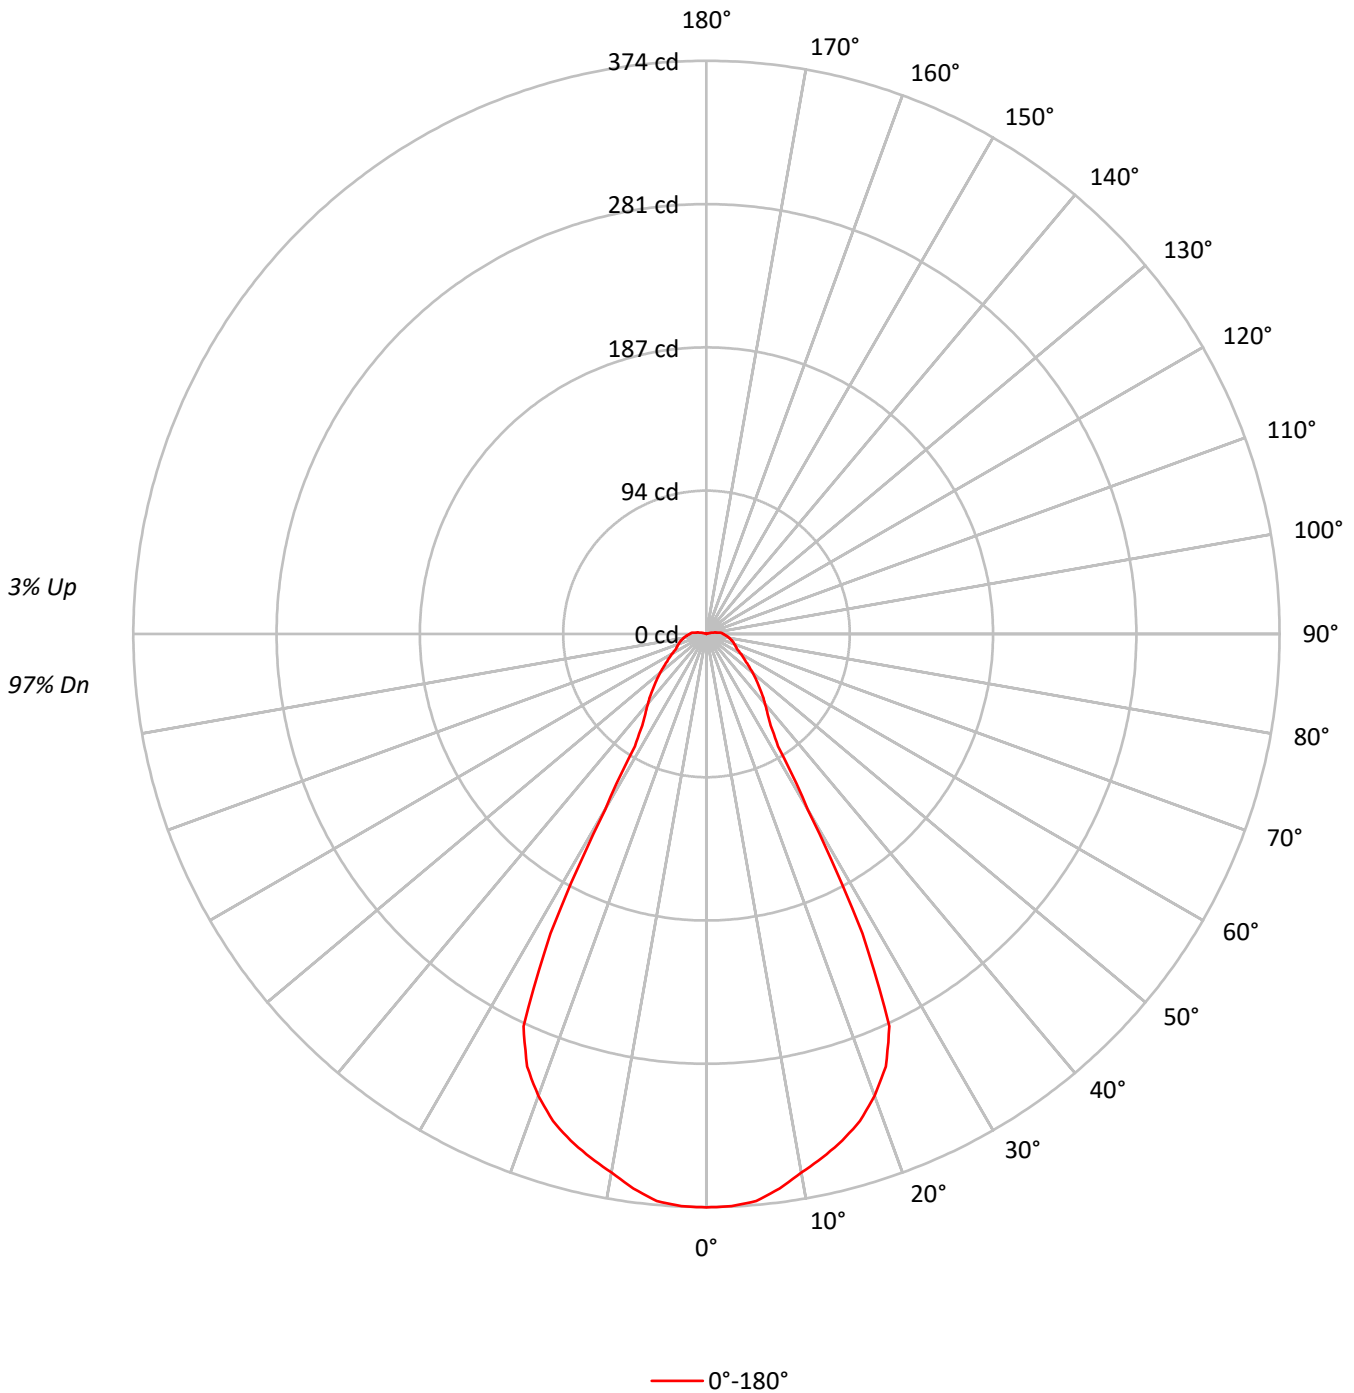

TEST NUMBER: P702275

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	110	110	110		104	104	104		99	99	99	97
1	110	106	102	99	107	103	100	97	99	96	93		94	92	90		90	89	87	85
2	102	96	90	86	100	94	89	84	90	86	82		86	83	80		83	80	78	76
3	96	87	81	76	93	86	80	75	83	77	73		80	75	72		77	73	70	68
4	90	80	73	68	88	79	72	67	76	71	66		74	69	65		71	67	64	62
5	85	74	67	62	83	73	66	61	71	65	61		69	64	60		67	62	59	57
6	80	69	62	57	78	68	61	56	66	60	56		64	59	55		63	58	54	53
7	75	64	57	52	74	64	57	52	62	56	52		60	55	51		59	54	51	49
8	71	60	53	49	70	60	53	48	58	52	48		57	52	48		56	51	47	46
9	68	57	50	45	66	56	50	45	55	49	45		54	48	45		53	48	44	43
10	64	54	47	43	63	53	47	42	52	46	42		51	46	42		50	45	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	24413
5°	21742
10°	19070
15°	16945
20°	14893
25°	12439
30°	5583
35°	2974
40°	2363
45°	1900
50°	1526
55°	1210
60°	1007
65°	851
70°	781
75°	718
80°	651
85°	588

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1900 cd/sqm

TEST NUMBER: P702275

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.0	8.1
10°-20°	96.2	22.3
20°-30°	117.3	27.2
30°-40°	49.7	11.5
40°-50°	37.7	8.7
50°-60°	28.5	6.6
60°-70°	21.8	5.1
70°-80°	18.3	4.2
80°-90°	14.1	3.3
90°-100°	9.4	2.2
100°-110°	2.8	0.7
110°-120°	0.2	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	248.4	57.7
0°-40°	298.1	69.2
0°-60°	364.3	84.5
0°-90°	418.5	97.1
90°-120°	12.4	2.9
90°-150°	12.4	2.9
90°-180°	12.0	2.8
0°-180°	430.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	374	
5°	372	35
15°	342	96
25°	282	117
35°	73	50
45°	49	38
55°	31	29
65°	22	22
75°	17	18
85°	13	11
90°	11	6
95°	9	7
105°	2	3
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702275

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF

CANDELA DISTRIBUTION (FULL):

0°	
0°	374.2
2.5°	373.7
5°	371.5
7.5°	365.0
10°	356.9
12.5°	349.9
15°	342.3
17.5°	333.2
20°	320.7
22.5°	305.6
25°	282.4
27.5°	220.3
30°	132.3
32.5°	86.9
35°	72.9
37.5°	65.3
40°	59.4
42.5°	54.0
45°	48.6
47.5°	43.7
50°	39.4
52.5°	35.1
55°	31.3
57.5°	28.6
60°	25.9
62.5°	23.2
65°	21.6
67.5°	20.5
70°	19.4
72.5°	18.4
75°	17.3
77.5°	16.2
80°	15.1
82.5°	14.0
85°	13.0
87.5°	11.9
90°	10.8
92.5°	10.3
95°	9.2
97.5°	7.0
100°	5.4
102.5°	3.8
105°	2.2
107.5°	1.6
110°	0.5

TEST NUMBER: P702275

CATALOG NUMBER: 340-6C-05-D010 / 340-EU4C-1020-9035-4LBW1LI-FF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.5
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)