

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702318

Luminaire Tested: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702318
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE, CLEAR OUTSIDE GLA
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 684.5 lumens
Efficiency: N/A
Efficacy: 69.1 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702318

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

Luminous Intensity Polar Plot

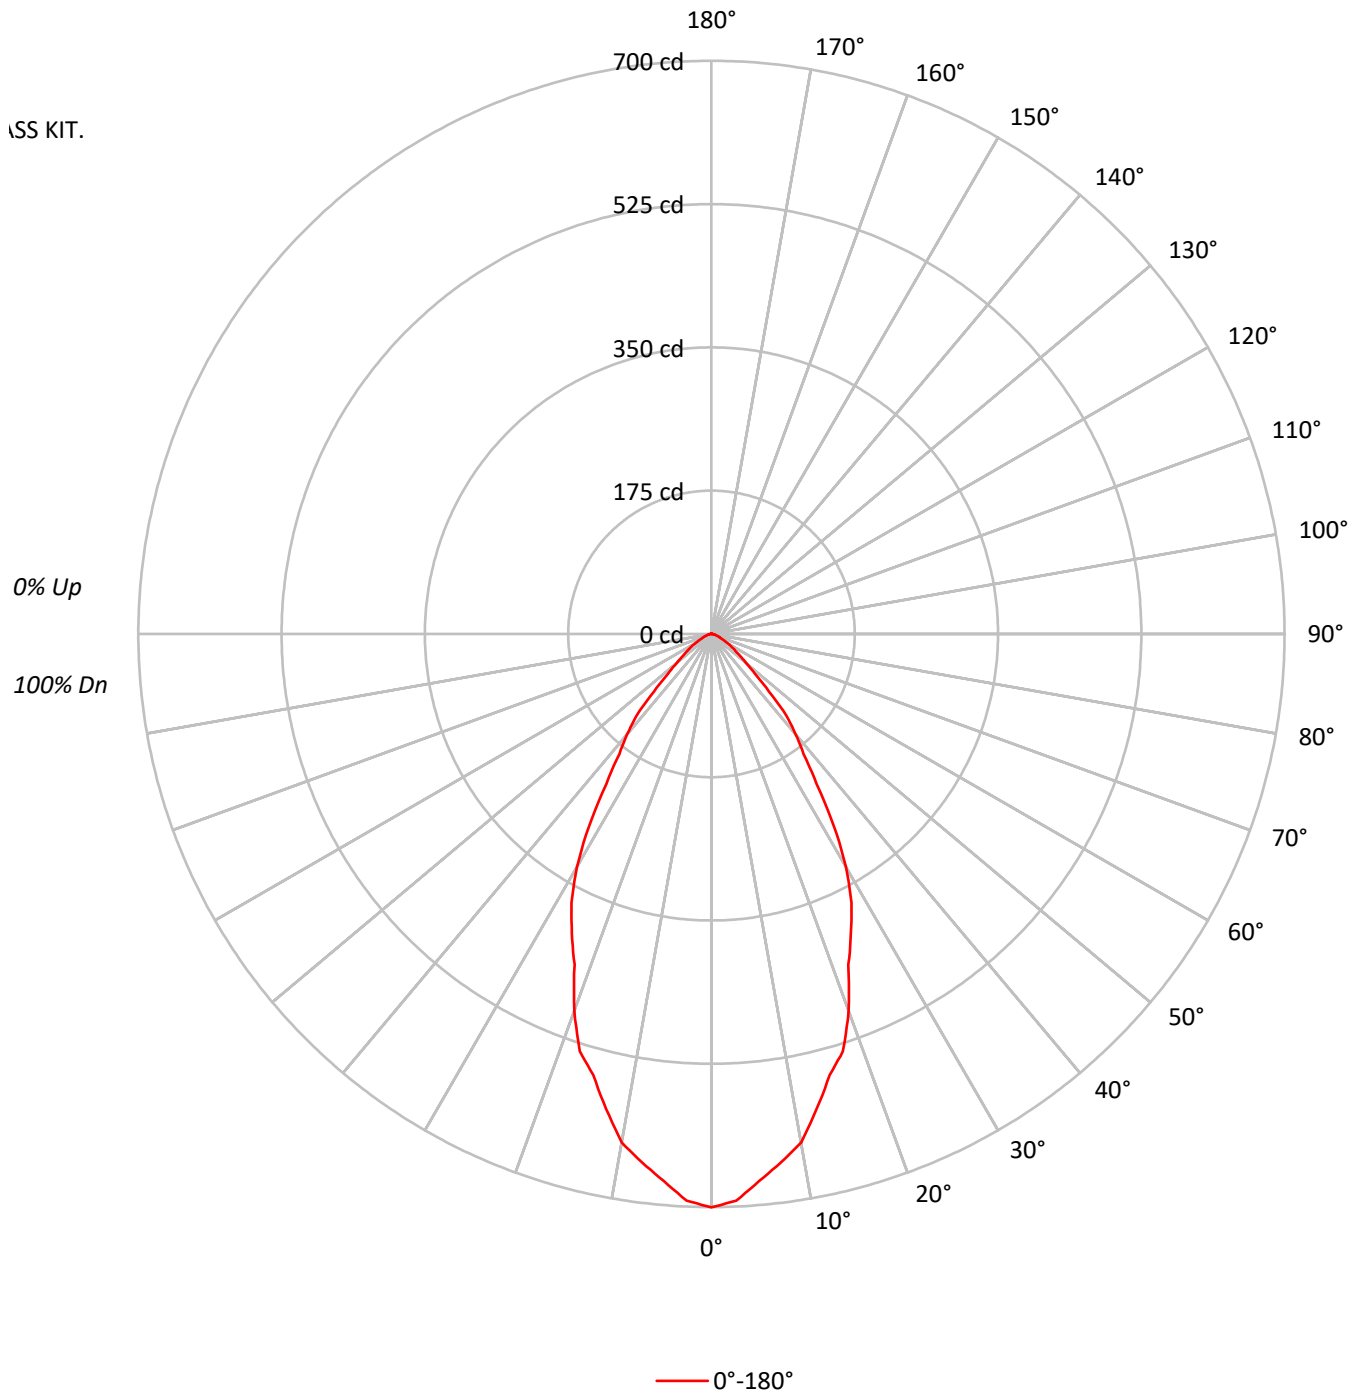

TEST NUMBER: P702318

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45688
5°	43917
10°	41782
15°	37661
20°	34026
25°	29024
30°	24770
35°	17840
40°	13618
45°	9162
50°	5663
55°	4072
60°	2962
65°	2022
70°	1717
75°	1386
80°	1277
85°	1048

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9162 cd/sqm

TEST NUMBER: P702318

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.8	9.2
10°-20°	157.3	23.0
20°-30°	185.4	27.1
30°-40°	144.1	21.1
40°-50°	79.1	11.6
50°-60°	32.9	4.8
60°-70°	13.9	2.0
70°-80°	6.0	0.9
80°-90°	1.7	0.2
90°-100°	0.8	0.1
100°-110°	0.5	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	405.5	59.2
0°-40°	549.6	80.3
0°-60°	661.6	96.7
0°-90°	683.3	99.8
90°-120°	1.2	0.2
90°-150°	1.2	0.2
90°-180°	1.0	0.1
0°-180°	684.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	700	
5°	671	63
15°	558	157
25°	403	185
35°	224	144
45°	99	79
55°	36	33
65°	13	14
75°	6	6
85°	1	2
90°	1	0
95°	1	1
105°	1	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702318

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	700.3
2.5°	692.7
5°	670.6
7.5°	650.7
10°	630.7
12.5°	594.1
15°	557.6
17.5°	534.2
20°	490.1
22.5°	437.0
25°	403.2
27.5°	370.1
30°	328.8
32.5°	278.5
35°	224.0
37.5°	184.7
40°	159.9
42.5°	135.8
45°	99.3
47.5°	71.7
50°	55.8
52.5°	44.1
55°	35.8
57.5°	28.9
60°	22.7
62.5°	16.5
65°	13.1
67.5°	11.0
70°	9.0
72.5°	6.9
75°	5.5
77.5°	4.1
80°	3.4
82.5°	2.1
85°	1.4
87.5°	0.7
90°	0.7
92.5°	0.7
95°	0.7
97.5°	0.7
100°	0.7
102.5°	0.7
105°	0.7
107.5°	0.0
110°	0.0

TEST NUMBER: P702318

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9027-4LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)