

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P702337

Luminaire Tested: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

Issue Date: 8/30/2023

Test Information

Test Method: LM-79-2019
Report Number: P702337
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-13)
Test Lab: INNOVATION CENTER
Issue Date: 8/30/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: SHAPER
Catalog Number: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ
Description: FARALLON 6" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 623.7 lumens
Efficiency: N/A
Efficacy: 63.0 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.54
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P702337

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

Luminous Intensity Polar Plot

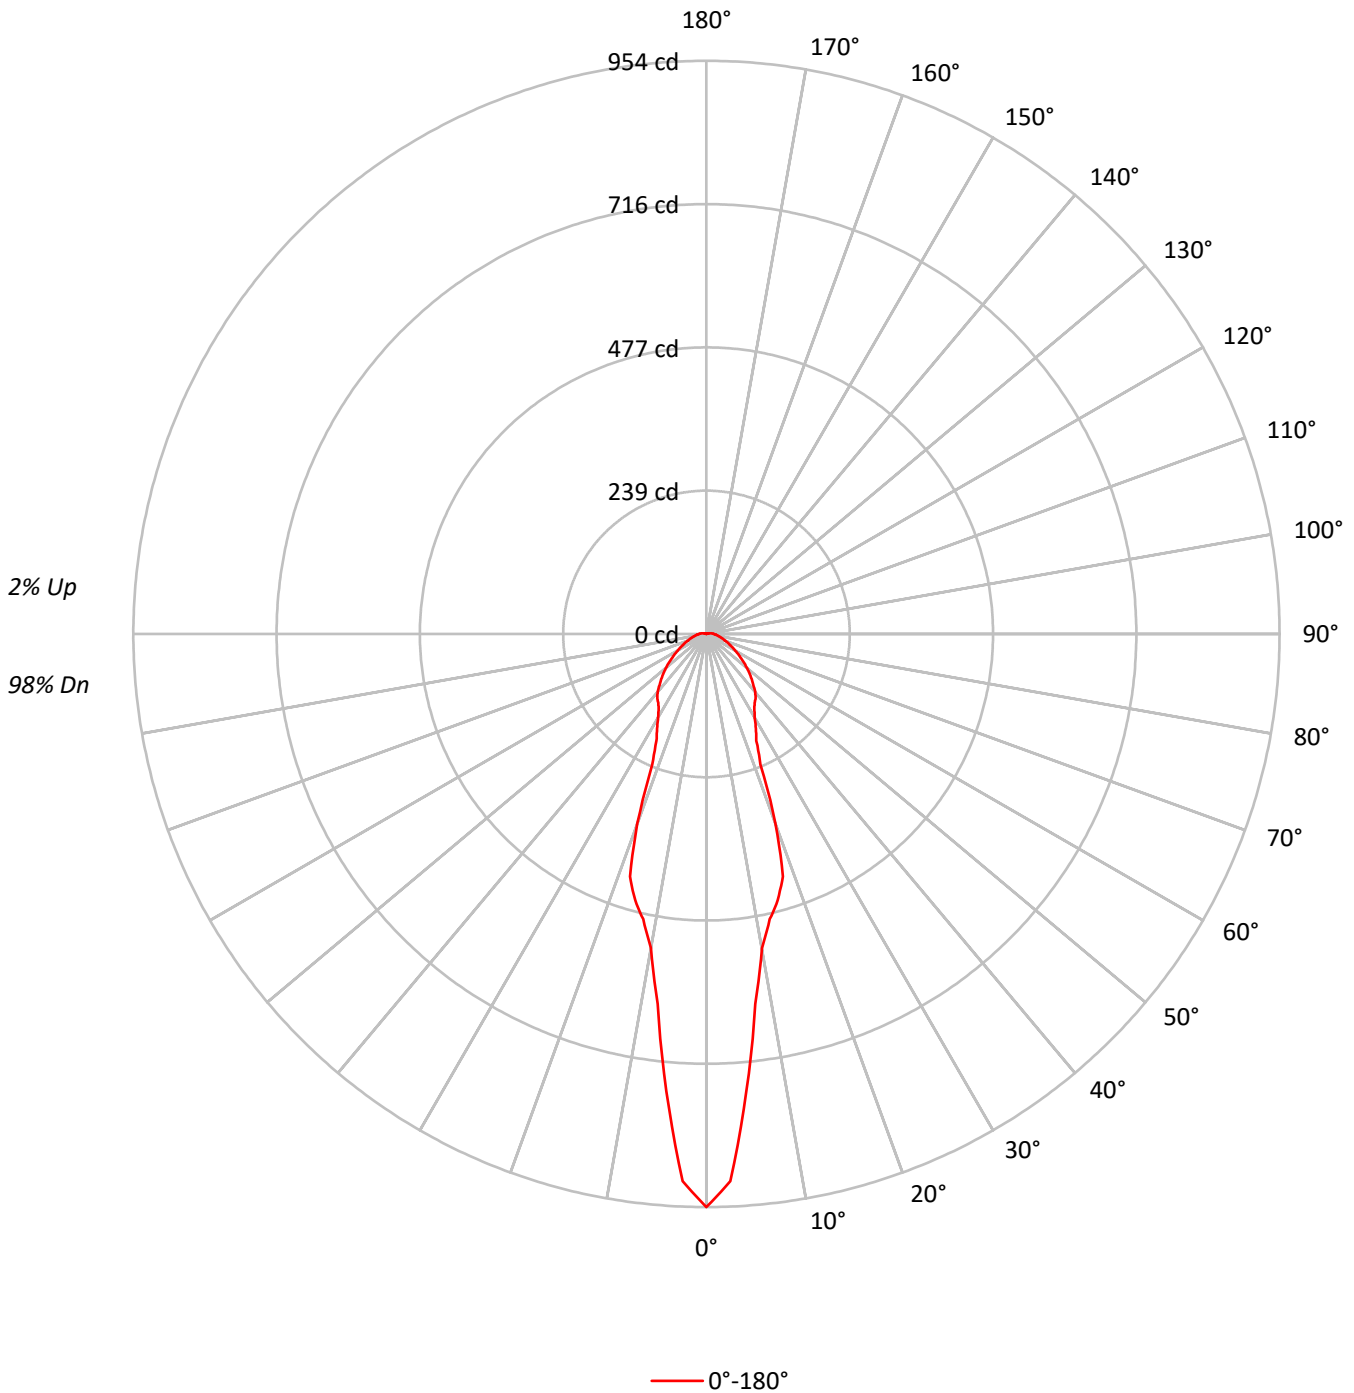

TEST NUMBER: P702337

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93		94	92	90		90	89	87	85
2	102	95	89	84	99	93	87	83	89	84	81		85	82	78		82	79	76	74
3	95	86	79	73	92	84	78	72	81	75	71		78	73	70		75	71	68	66
4	88	78	71	65	86	77	70	64	74	68	63		72	67	62		69	65	61	59
5	83	72	64	58	81	71	63	58	68	62	57		66	61	57		64	60	56	54
6	78	66	59	53	76	65	58	53	63	57	52		62	56	52		60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48		58	52	48		56	51	47	46
8	69	58	50	45	68	57	50	45	55	49	45		54	48	44		53	48	44	42
9	66	54	47	42	64	53	47	42	52	46	42		51	45	41		50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39		48	43	39		47	42	39	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62240
5°	44708
10°	28368
15°	22712
20°	15622
25°	8660
30°	6790
35°	5703
40°	5012
45°	4156
50°	3412
55°	2702
60°	2150
65°	1695
70°	1349
75°	1087
80°	880
85°	724

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4156 cd/sqm

TEST NUMBER: P702337

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.3	10.5
10°-20°	125.3	20.1
20°-30°	97.2	15.6
30°-40°	88.5	14.2
40°-50°	82.1	13.2
50°-60°	63.2	10.1
60°-70°	43.2	6.9
70°-80°	28.1	4.5
80°-90°	17.5	2.8
90°-100°	10.1	1.6
100°-110°	3.2	0.5
110°-120°	0.1	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	287.8	46.1
0°-40°	376.3	60.3
0°-60°	521.5	83.6
0°-90°	610.3	97.8
90°-120°	13.4	2.2
90°-150°	13.4	2.2
90°-180°	13.0	2.1
0°-180°	623.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	954	
5°	764	65
15°	459	125
25°	197	97
35°	140	88
45°	106	82
55°	70	63
65°	43	43
75°	26	28
85°	16	14
90°	12	7
95°	10	7
105°	3	3
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P702337

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

CANDELA DISTRIBUTION (FULL):

0°	
0°	954.0
2.5°	911.7
5°	763.9
7.5°	621.2
10°	530.9
12.5°	486.4
15°	458.8
17.5°	423.1
20°	336.4
22.5°	235.2
25°	196.6
27.5°	177.7
30°	160.9
32.5°	147.8
35°	139.8
37.5°	134.7
40°	126.0
42.5°	115.8
45°	106.3
47.5°	96.9
50°	88.1
52.5°	78.6
55°	69.9
57.5°	62.6
60°	55.3
62.5°	48.8
65°	43.0
67.5°	38.6
70°	33.5
72.5°	29.9
75°	26.2
77.5°	23.3
80°	20.4
82.5°	18.2
85°	16.0
87.5°	13.8
90°	11.7
92.5°	10.9
95°	9.5
97.5°	8.0
100°	5.8
102.5°	4.4
105°	2.9
107.5°	1.5
110°	0.7

TEST NUMBER: P702337

CATALOG NUMBER: 340-6C-08-D010 / 340-EU4C-1020-9040-4LBW1LI-CQ

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)