

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: SHAPER

Report Number: P600694

Luminaire Tested: 215-90-30K-LL7-UNV-STD-X-X-WHHR-BR-X

Issue Date: 7/6/2022

**Test Information**

Test Method: LM-79-2019  
Report Number: P600694  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2203-582-13)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/6/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: SHAPER  
Catalog Number: 215-90-30K-LL7-UNV-STD-X-X-WHHR-BR-X  
Description: SHAPER PrentaLux 200 SERIES 3D PRINTED LUMINAIRE  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4851.0 lumens  
Efficiency: N/A  
Efficacy: 87.6 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.85  
Luminous Opening: Circular (Dia: 1' x H: 0')  
CIE Type: Direct

Input Watts (W): 55.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P600694  
CATALOG NUMBER: 215-90-30K-LL7-UNV-STD-X-X-WHHR-BR-X

### Luminous Intensity Polar Plot

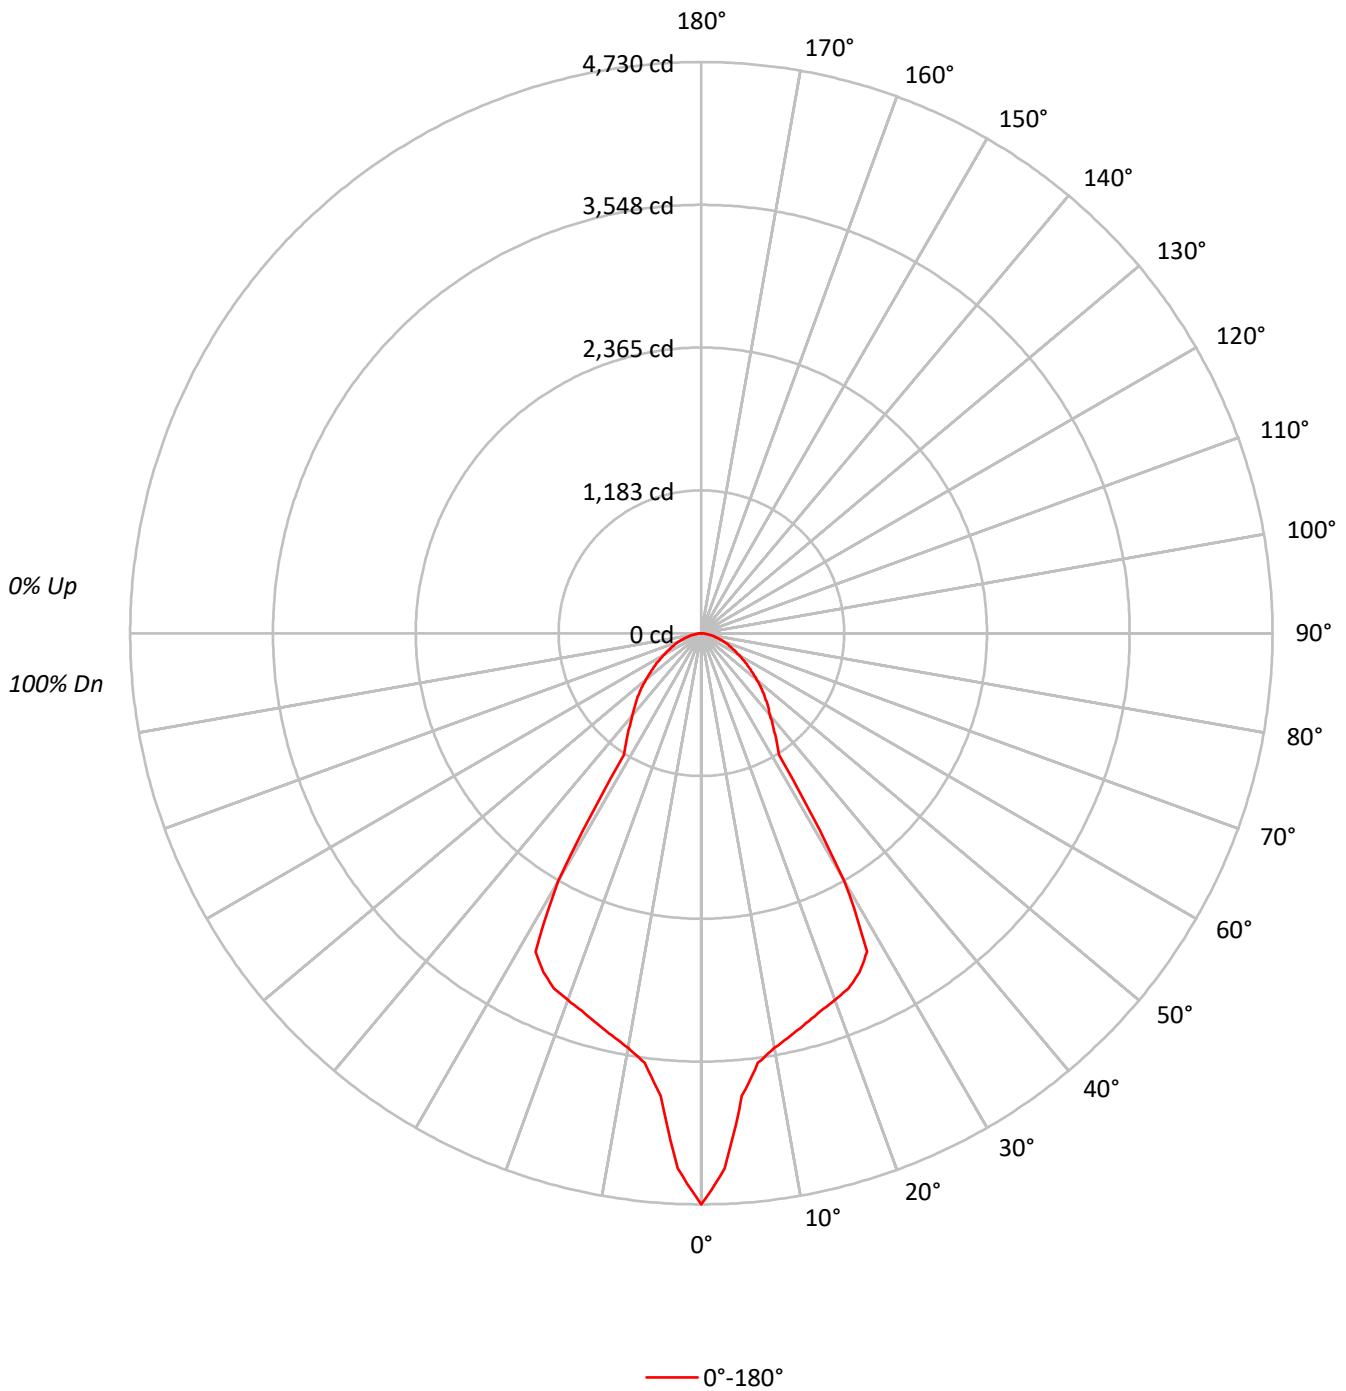



TEST NUMBER: P600694

CATALOG NUMBER: 215-90-30K-LL7-UNV-STD-X-X-WHHR-BR-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100	
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	95	93	92	90			90	
2	104	98	93	89	102	96	92	87	93	89	86	90	87	84	87	84	82	80			80	
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	72			72	
4	91	82	75	70	89	81	74	69	78	73	68	76	71	67	74	70	67	65			65	
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59			59	
6	80	70	62	57	79	69	62	57	67	61	56	66	60	56	64	59	56	54			54	
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51	50			50	
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	47	46			46	
9	68	56	49	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43			43	
10	64	53	46	42	63	52	46	42	51	46	42	51	45	41	50	45	41	40			40	

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	64830
5°	52922
10°	48521
15°	47465
20°	47136
25°	46826
30°	37446
35°	18079
40°	15844
45°	14387
50°	12771
55°	11223
60°	9818
65°	8584
70°	7497
75°	6322
80°	4396
85°	1572

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14387 cd/sqm



TEST NUMBER: P600694

CATALOG NUMBER: 215-90-30K-LL7-UNV-STD-X-X-WHHR-BR-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	360.1	7.4
10°-20°	945.8	19.5
20°-30°	1385.4	28.6
30°-40°	753.0	15.5
40°-50°	571.5	11.8
50°-60°	422.6	8.7
60°-70°	265.6	5.5
70°-80°	126.9	2.6
80°-90°	20.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2691.4	55.5
0°-40°	3444.4	71.0
0°-60°	4438.5	91.5
0°-90°	4851.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4851.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4730	
5°	3847	360
15°	3345	946
25°	3097	1385
35°	1081	753
45°	742	571
55°	470	423
65°	265	266
75°	119	127
85°	10	20
90°	0	



TEST NUMBER: P600694

CATALOG NUMBER: 215-90-30K-LL7-UNV-STD-X-X-WHHR-BR-X

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4730.4
2.5°	4437.9
5°	3846.8
7.5°	3588.1
10°	3486.6
12.5°	3413.0
15°	3345.3
17.5°	3281.7
20°	3231.9
22.5°	3184.1
25°	3096.6
27.5°	2973.2
30°	2366.2
32.5°	1194.1
35°	1080.6
37.5°	977.1
40°	885.6
42.5°	812.0
45°	742.3
47.5°	670.7
50°	599.0
52.5°	533.3
55°	469.7
57.5°	411.9
60°	358.2
62.5°	310.5
65°	264.7
67.5°	226.9
70°	187.1
72.5°	153.2
75°	119.4
77.5°	87.6
80°	55.7
82.5°	31.8
85°	10.0
87.5°	4.0
90°	0.0

(END OF REPORT)