

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P148565

Luminaire Tested: **AVM-F03-LED-E-U-5XQ**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P148565
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33676)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVM-F03-LED-E-U-5XQ
Description: VISION SITE MEDIUM LED LUMINAIRE
(3) LIGHTBARS WITH AccuLED OPTICS - TYPE 5 SQUARE EXTRA WIDE
Light Source: (21) 4000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7876.4 lumens
Efficiency: N/A
Efficacy: 100.6 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type V - Short - Non-Cutoff
BUG Rating: B3 - U0 - G2


Input Watts (W): 78.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P148565
 CATALOG NUMBER: AVM-F03-LED-E-U-5XQ

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

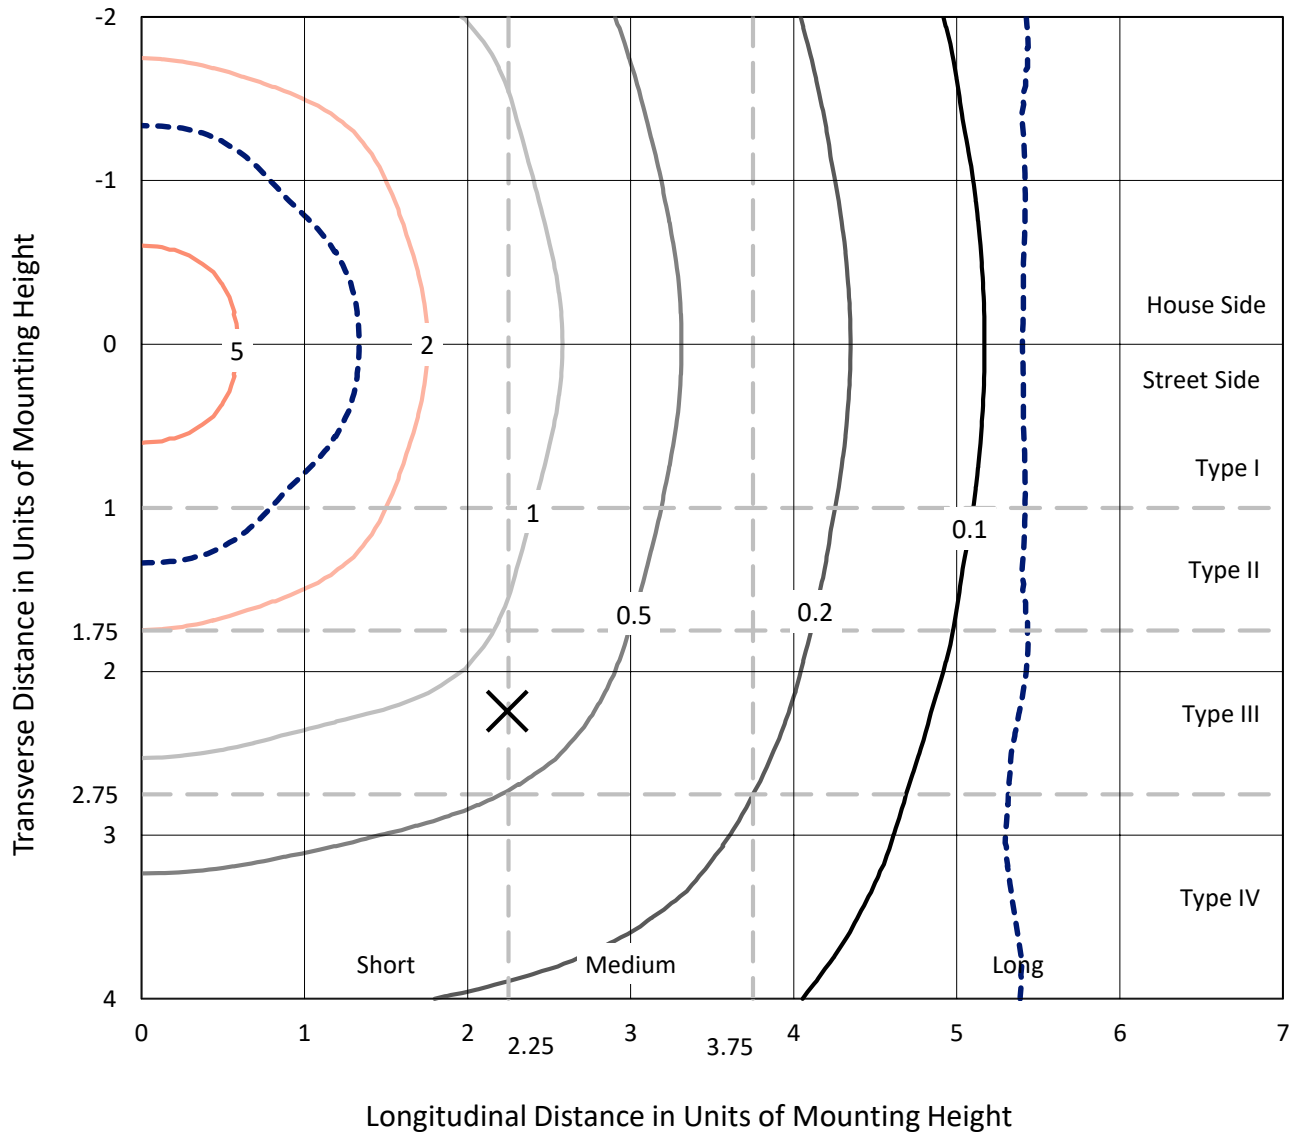


Based on 10 foot mounting height. Maximum calculated value = 7.5 fc
 Type V - Short - Non-Cutoff

REPORT NUMBER: P148565

CATALOG NUMBER: AVM-F03-LED-E-U-5XQ

Luminous Intensity Polar Plot

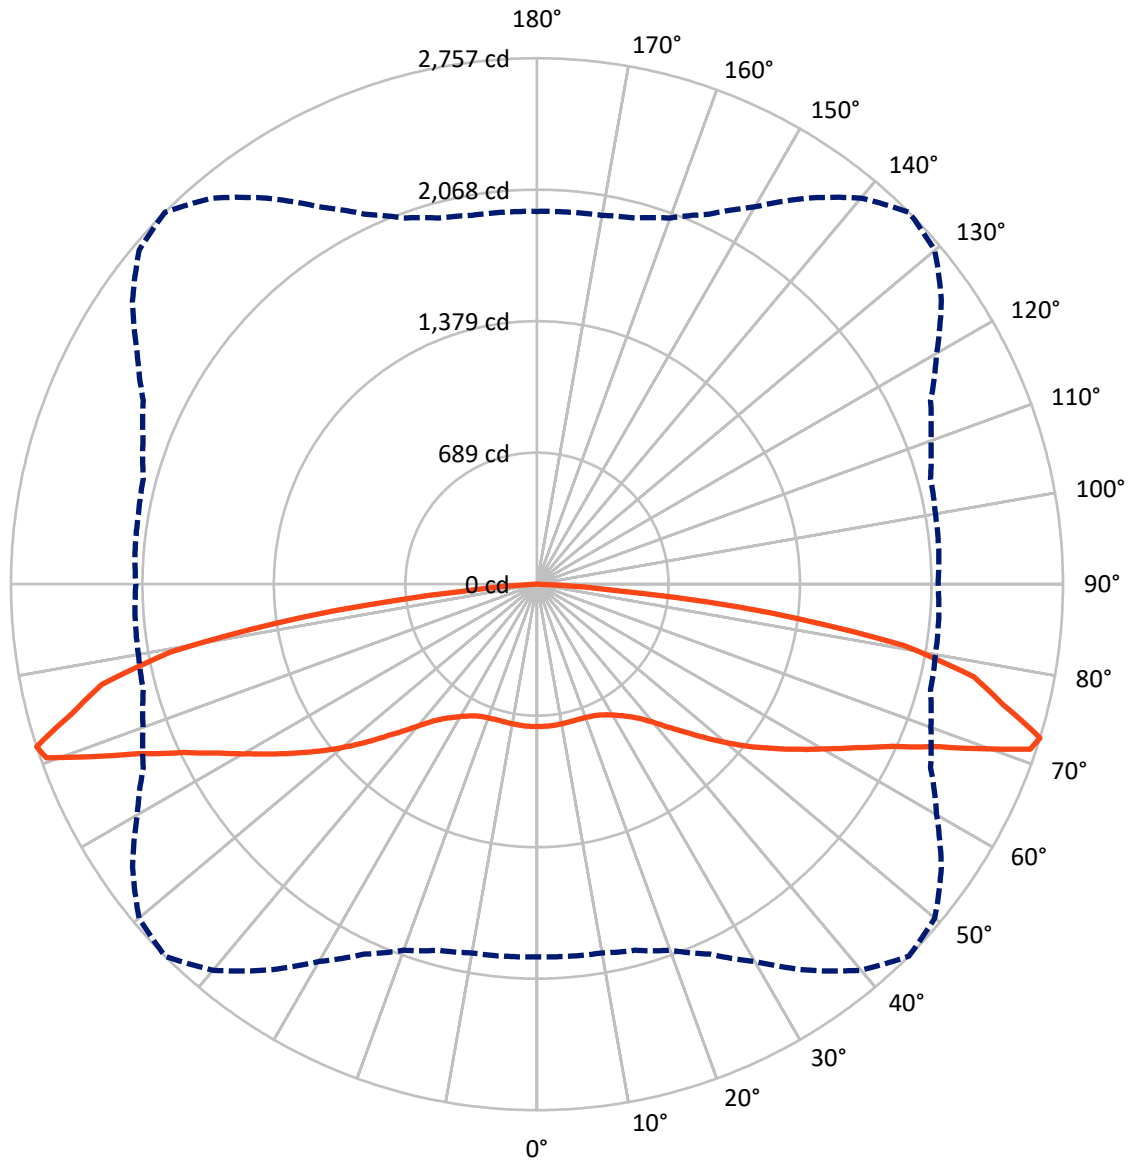

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 72.5-Deg Vertical

REPORT NUMBER: P148565

CATALOG NUMBER: AVM-F03-LED-E-U-5XQ

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3938.2	0.0	3938.2
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	3938.2	0.0	3938.2
	% Fixture	50.0	0.0	50.0
Total	Lumens	7876.4	0.0	7876.4
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.1	0.9
10°-20°	210.4	2.7
20°-30°	352.3	4.5
30°-40°	537.1	6.8
40°-50°	857.6	10.9
50°-60°	1318.6	16.7
60°-70°	1920.0	24.4
70°-80°	2162.8	27.5
80°-90°	446.5	5.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	7876.4	100.0
0°-180°	7876.4	100.0



REPORT NUMBER: P148565


CATALOG NUMBER: AVM-F03-LED-E-U-5XQ

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	316.9	4.0			
FM (30°-60°)	1356.7	17.2			
FH (60°-80°)	2041.4	25.9			G2/5000
FVH (80°-90°)	223.2	2.8			G2/225
BL (0°-30°)	316.9	4.0	B1/500		
BM (30°-60°)	1356.7	17.2	B2/2500		
BH (60°-80°)	2041.4	25.9	B3/2500		G2/5000
BVH (80°-90°)	223.2	2.8			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G2

Type V Short

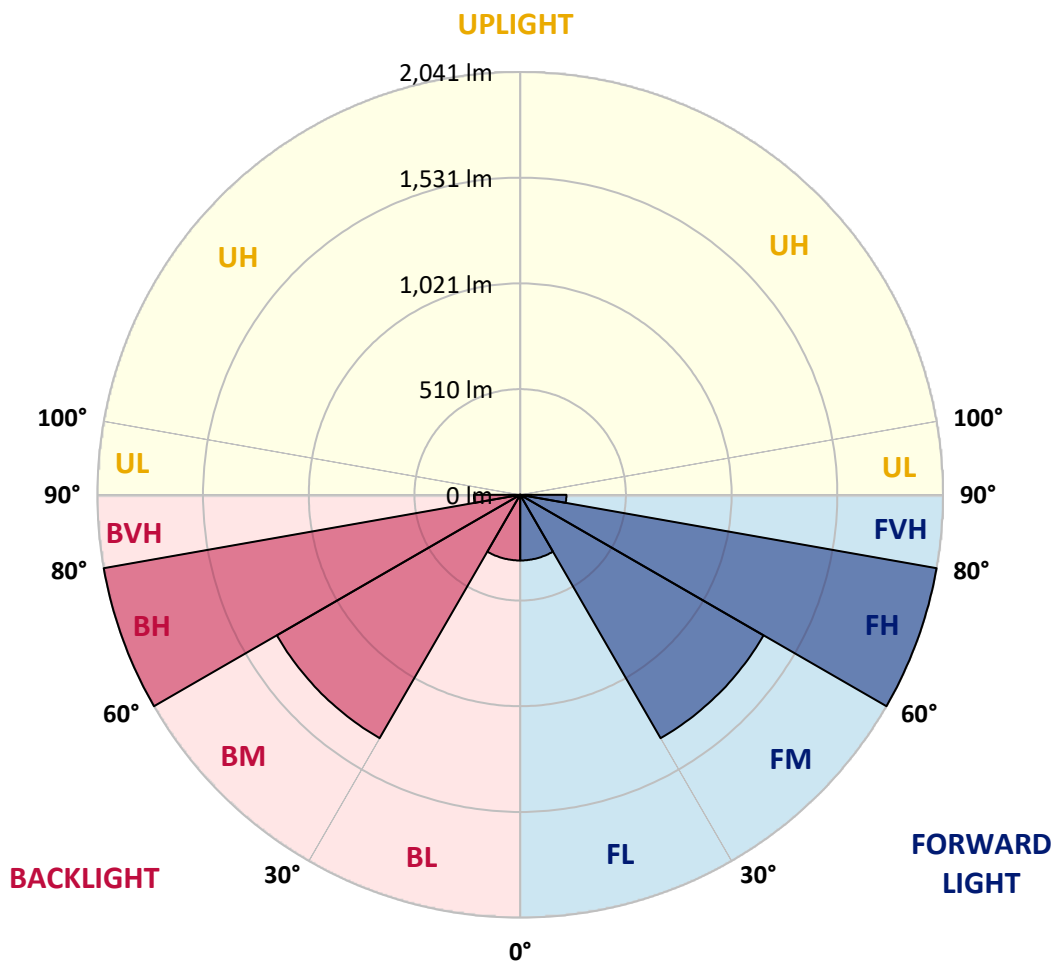



REPORT NUMBER: P148565

CATALOG NUMBER: AVM-F03-LED-E-U-5XQ

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	746.3	746.3	746.3	746.3	746.3	746.3	746.3	746.3	746.3	746.3	746.3
2.5°	747.6	747.9	747.8	747.3	747.5	747.3	746.9	746.7	745.2	746.1	747.3
5°	747.5	747.1	746.9	746.7	746.7	747.3	746.7	746.1	745.8	746.3	745.7
7.5°	747.1	746.3	745.8	745.6	745.8	746.1	745.4	744.6	745.2	744.6	743.8
10°	745.9	745.2	745.4	744.6	744.8	744.6	743.8	743.2	743.6	743.0	741.9
12.5°	746.3	745.2	745.1	744.6	744.4	744.2	743.2	742.2	742.3	742.0	740.9
15°	746.3	745.7	745.4	744.6	744.4	744.0	742.8	742.3	742.4	741.7	740.5
17.5°	746.7	746.3	746.3	745.2	744.8	744.6	743.2	742.5	743.2	741.9	741.1
20°	747.9	747.5	747.7	747.1	746.3	746.3	745.2	744.8	745.0	744.8	742.6
22.5°	750.4	750.4	750.8	750.6	750.4	750.6	749.8	749.8	750.0	750.0	748.1
25°	757.4	757.2	757.6	757.6	757.8	759.3	758.7	758.4	759.5	759.5	757.6
27.5°	770.6	770.2	770.7	771.1	772.1	773.9	773.5	774.1	775.8	775.4	773.7
30°	785.9	785.5	786.5	787.8	788.6	791.5	790.2	793.3	794.8	796.0	794.8
32.5°	808.2	808.2	810.0	810.9	812.8	815.6	816.1	818.5	820.4	822.4	821.0
35°	837.9	837.5	839.0	840.4	842.6	845.3	846.4	849.7	852.6	854.0	851.3
37.5°	883.3	881.0	883.7	884.6	886.4	887.0	889.9	894.0	897.1	896.8	894.9
40°	944.8	944.4	943.4	942.1	945.0	946.0	946.0	951.6	956.6	955.8	955.5
42.5°	1016.6	1014.8	1013.5	1013.5	1015.2	1015.6	1022.0	1026.1	1029.6	1030.4	1029.6
45°	1093.8	1091.9	1092.4	1091.6	1092.1	1094.8	1098.6	1106.2	1112.8	1113.0	1109.5
47.5°	1176.8	1171.0	1175.5	1169.2	1173.1	1175.2	1184.4	1195.6	1207.1	1209.2	1206.1
50°	1261.0	1260.4	1260.0	1258.7	1260.6	1265.1	1276.5	1294.0	1305.1	1312.6	1307.6
52.5°	1353.0	1349.9	1348.5	1346.4	1348.3	1357.2	1373.0	1388.4	1408.3	1416.8	1410.0
55°	1442.6	1441.6	1436.2	1436.0	1439.9	1453.7	1471.1	1489.9	1511.6	1521.0	1518.6
57.5°	1534.6	1528.6	1527.0	1524.5	1532.4	1545.4	1566.6	1600.5	1623.0	1633.7	1627.5
60°	1624.6	1620.1	1616.6	1615.8	1621.1	1639.3	1669.8	1710.5	1738.3	1752.4	1742.5
62.5°	1721.2	1718.3	1714.2	1709.4	1720.8	1744.1	1782.1	1827.1	1868.2	1885.5	1870.4
65°	1841.4	1835.3	1830.8	1824.8	1834.1	1863.4	1911.1	1974.4	2029.6	2049.8	2039.0
67.5°	1968.0	1962.5	1962.9	1959.2	1975.7	2016.4	2077.8	2163.9	2237.8	2272.2	2252.0
70°	2078.6	2081.8	2082.6	2097.6	2126.2	2188.0	2290.4	2425.2	2537.2	2589.8	2568.2
71°	2046.0	2052.9	2063.4	2079.1	2128.2	2201.5	2341.2	2504.4	2638.2	2727.3	2697.4
72.5°	1953.6	1957.7	1963.1	1987.0	2042.6	2139.5	2283.4	2470.0	2641.9	2757.3	2722.6
75°	1819.8	1823.8	1825.6	1842.4	1892.9	1977.6	2109.2	2274.7	2426.4	2524.6	2515.0
77.5°	1618.0	1618.6	1633.1	1658.9	1715.6	1812.4	1951.1	2122.8	2265.4	2341.8	2293.3
80°	1162.0	1154.1	1168.9	1202.1	1272.3	1383.4	1525.4	1721.4	1879.7	1951.2	1876.0
82.5°	442.1	466.0	503.8	558.6	582.4	705.9	838.3	953.5	1086.8	1235.8	1198.5
85°	47.5	53.4	67.0	83.2	105.0	145.3	200.8	274.1	337.8	397.1	352.5
87.5°	17.8	18.2	20.2	23.3	23.8	24.8	26.4	30.8	28.7	24.8	20.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P148565

CATALOG NUMBER: AVM-F03-LED-E-U-5XQ

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	746.3	746.3	746.3	746.3	746.3	746.3	746.3	746.3
2.5°	746.3	746.5	746.3	746.5	746.5	745.7	745.9	745.4
5°	746.1	745.4	745.6	745.9	745.6	746.1	745.5	745.9
7.5°	745.0	743.8	744.2	744.2	743.8	744.4	744.0	743.8
10°	743.0	741.3	742.2	741.7	741.5	741.7	741.7	741.8
12.5°	741.1	740.1	740.2	740.1	739.8	740.5	740.3	740.5
15°	740.7	739.0	738.8	738.4	738.6	739.0	739.0	739.7
17.5°	740.3	738.2	738.0	737.6	737.8	738.6	738.8	738.4
20°	741.5	739.8	739.5	739.0	738.8	739.8	739.6	739.7
22.5°	747.3	745.2	745.0	743.4	742.8	743.3	743.0	743.0
25°	756.6	754.1	753.3	751.0	749.4	749.4	748.8	748.4
27.5°	773.3	769.6	768.8	766.9	764.7	765.1	763.8	763.6
30°	792.7	789.4	786.5	783.8	781.2	780.1	778.7	778.4
32.5°	818.1	814.4	810.9	807.6	803.8	802.4	799.9	798.7
35°	849.2	844.3	840.2	837.9	834.2	832.3	830.7	832.6
37.5°	892.8	886.8	884.8	882.0	879.6	876.7	877.3	876.7
40°	953.1	947.7	945.6	940.9	940.3	937.0	939.0	937.0
42.5°	1027.6	1017.7	1016.2	1012.5	1011.3	1009.4	1010.2	1008.8
45°	1108.7	1099.8	1098.2	1092.2	1092.4	1088.0	1089.7	1089.7
47.5°	1199.9	1190.6	1183.0	1178.6	1177.0	1174.3	1175.8	1175.6
50°	1294.0	1281.4	1273.0	1264.5	1260.8	1261.8	1258.9	1263.8
52.5°	1395.1	1376.4	1364.4	1356.4	1349.4	1350.8	1351.2	1352.6
55°	1499.8	1475.8	1458.5	1448.0	1441.6	1442.0	1443.9	1445.5
57.5°	1605.0	1575.1	1551.6	1535.9	1531.8	1533.6	1533.6	1533.4
60°	1714.2	1678.3	1648.0	1630.2	1626.5	1625.5	1633.5	1630.8
62.5°	1831.4	1788.3	1756.9	1734.2	1728.8	1732.6	1739.8	1738.1
65°	1986.8	1927.2	1886.7	1864.2	1855.2	1858.9	1868.6	1868.2
67.5°	2187.2	2103.8	2050.4	2021.5	2014.9	2019.4	2024.8	2030.0
70°	2486.9	2367.8	2291.4	2228.9	2202.1	2196.9	2202.3	2202.5
71°	2592.3	2455.5	2334.0	2257.6	2213.7	2195.1	2196.5	2187.2
72.5°	2588.0	2419.4	2277.2	2197.4	2136.3	2121.4	2114.2	2103.0
75°	2413.6	2261.7	2138.4	2051.2	1992.4	1974.9	1962.1	1961.4
77.5°	2188.9	2076.8	1940.8	1848.6	1776.9	1747.8	1734.8	1734.4
80°	1759.6	1591.8	1492.3	1436.8	1350.4	1325.4	1299.0	1289.0
82.5°	1064.1	831.5	676.1	600.8	559.1	460.4	413.2	390.9
85°	247.8	176.1	121.4	79.7	57.4	45.6	35.1	31.0
87.5°	16.7	13.2	11.8	9.5	7.2	7.0	4.4	3.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)