

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: STREETWORKS

Report Number: P148592

Luminaire Tested: **AVM-E06-LED-E-U-5XQ-7060**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P148592  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33676)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: STREETWORKS  
Catalog Number: AVM-E06-LED-E-U-5XQ-7060  
Description: VISION SITE MEDIUM LED LUMINAIRE  
(6) LIGHTBARS WITH AccuLED OPTICS - TYPE 5 SQUARE EXTRA WIDE  
Light Source: (126) 5700K CCT, 70 CRI LEDs  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 19580.4 lumens  
Efficiency: N/A  
Efficacy: 130.1 lumens/watt  
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')  
IES Classification: Type V - Short - Non-Cutoff  
BUG Rating: B5 - U0 - G4


Input Watts (W): 150.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P148592  
 CATALOG NUMBER: AVM-E06-LED-E-U-5XQ-7060

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

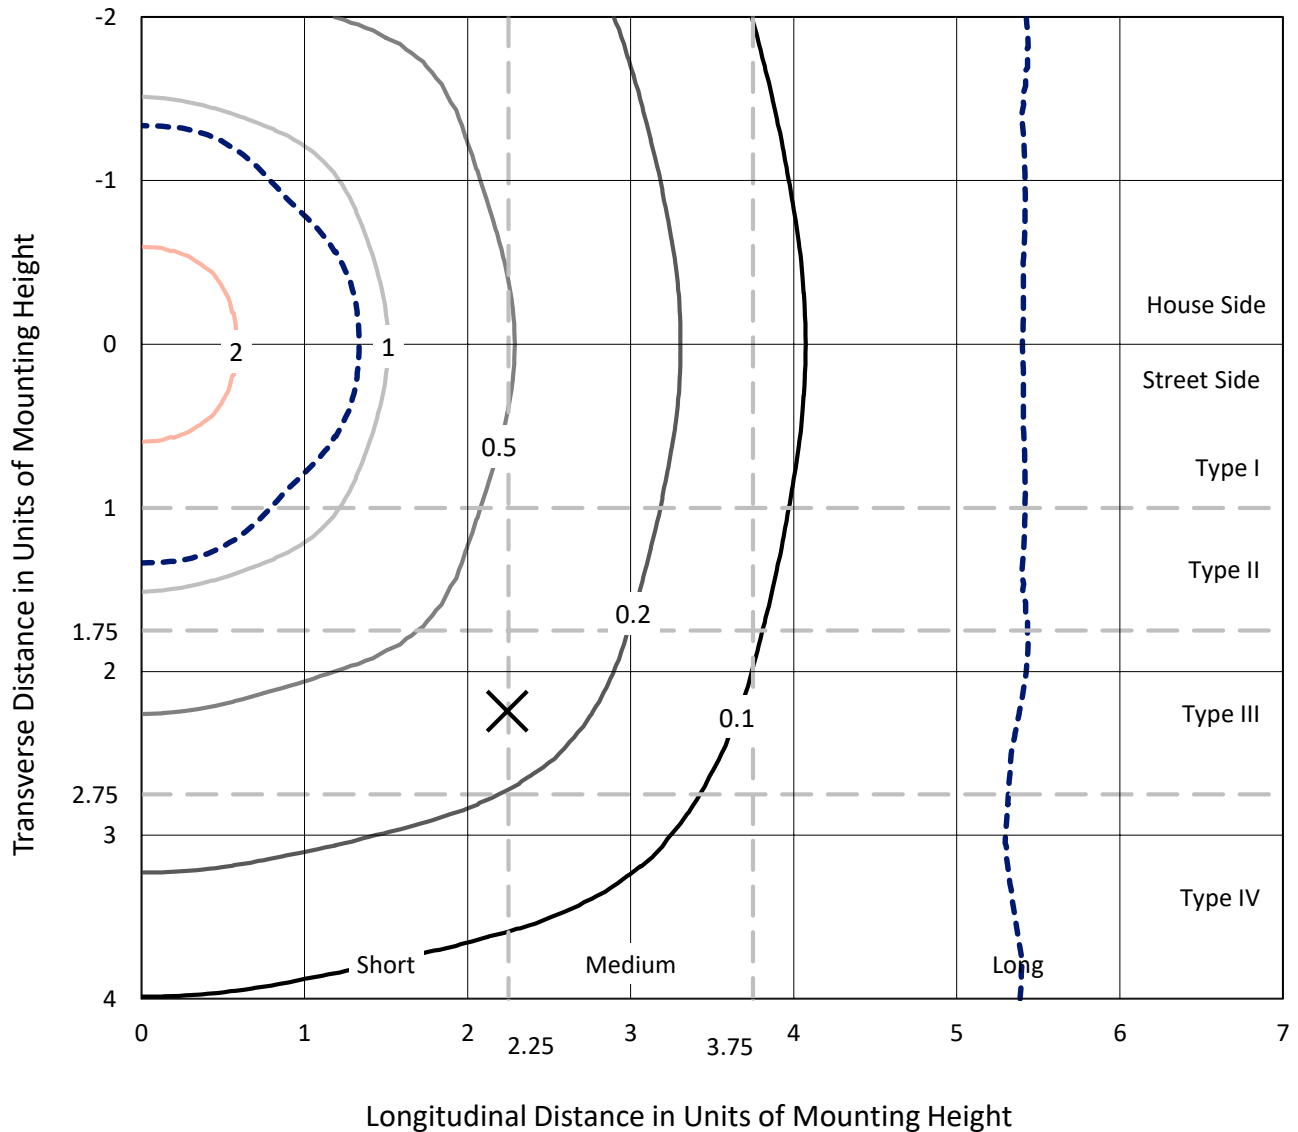

Based on 25 foot mounting height. Maximum calculated value = 3 fc  
 Type V - Short - Non-Cutoff

REPORT NUMBER: P148592  
CATALOG NUMBER: AVM-E06-LED-E-U-5XQ-7060

### Luminous Intensity Polar Plot

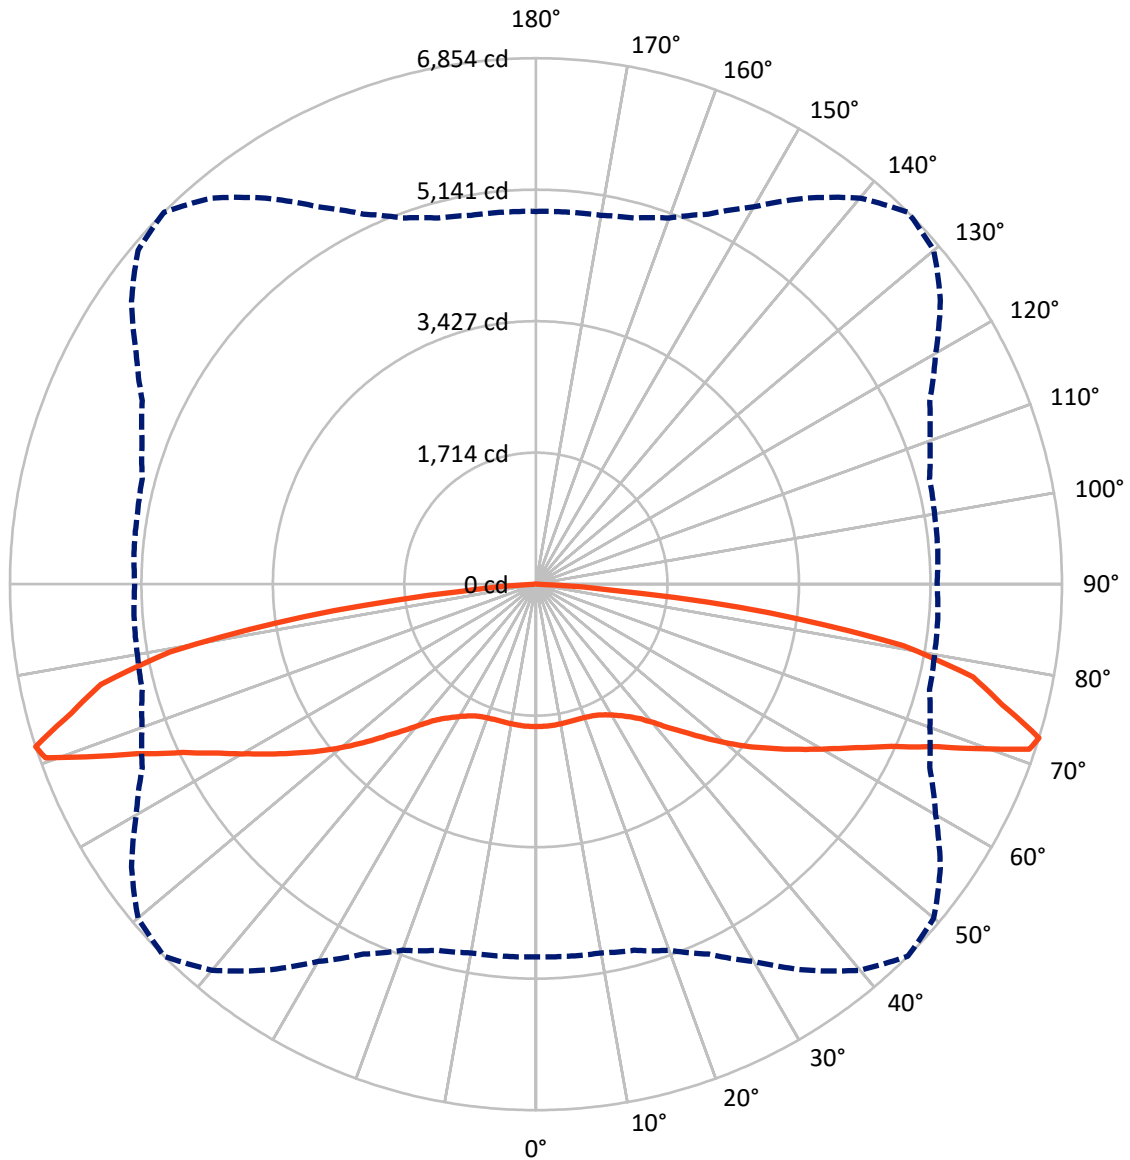

— Vertical Plane Through 45-Deg Lateral    - - - Horizontal Cone Through 72.5-Deg Vertical

REPORT NUMBER: P148592

CATALOG NUMBER: AVM-E06-LED-E-U-5XQ-7060

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	9790.2	0.0	9790.2
	% Fixture	50.0	0.0	50.0
<b>Street Side</b>	Lumens	9790.2	0.0	9790.2
	% Fixture	50.0	0.0	50.0
<b>Total</b>	Lumens	19580.4	0.0	19580.4
	% Fixture	100.0	0.0	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	176.8	0.9
10°-20°	523.0	2.7
20°-30°	875.8	4.5
30°-40°	1335.2	6.8
40°-50°	2132.0	10.9
50°-60°	3278.1	16.7
60°-70°	4772.9	24.4
70°-80°	5376.7	27.5
80°-90°	1109.9	5.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	19580.4	100.0
0°-180°	19580.4	100.0



REPORT NUMBER: P148592


CATALOG NUMBER: AVM-E06-LED-E-U-5XQ-7060

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	787.8	4.0			
FM	(30°-60°)	3372.6	17.2			
FH	(60°-80°)	5074.8	25.9			G3/7500
FVH	(80°-90°)	555.0	2.8			G4/750
BL	(0°-30°)	787.8	4.0	B2/1000		
BM	(30°-60°)	3372.6	17.2	B3/5000		
BH	(60°-80°)	5074.8	25.9	B5		G3/7500
BVH	(80°-90°)	555.0	2.8			G4/750
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B5-U0-G4**

Type V Short

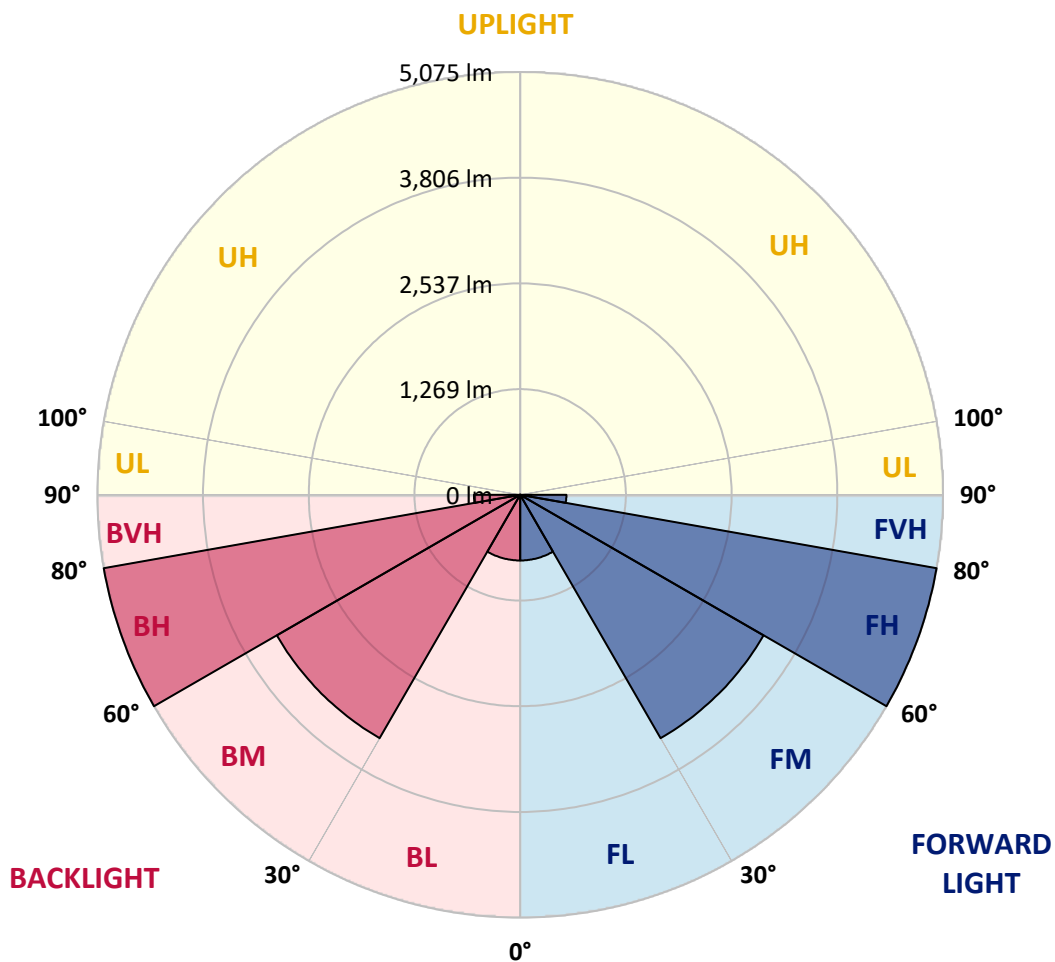



REPORT NUMBER: P148592

CATALOG NUMBER: AVM-E06-LED-E-U-5XQ-7060

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2
2.5°	1858.3	1859.3	1858.8	1857.8	1858.3	1857.8	1856.8	1856.2	1852.6	1854.7	1857.8
5°	1858.2	1857.2	1856.7	1856.2	1856.2	1857.8	1856.2	1854.7	1854.2	1855.2	1853.7
7.5°	1857.2	1855.2	1854.2	1853.7	1854.2	1854.7	1853.1	1851.1	1852.6	1851.1	1849.0
10°	1854.2	1852.6	1853.2	1851.1	1851.6	1851.1	1849.0	1847.5	1848.5	1847.0	1844.4
12.5°	1855.2	1852.6	1852.2	1851.1	1850.6	1850.1	1847.5	1845.0	1845.4	1844.4	1841.9
15°	1855.2	1853.6	1853.2	1851.1	1850.6	1849.6	1846.5	1845.4	1845.4	1843.9	1840.8
17.5°	1856.2	1855.2	1855.2	1852.6	1851.6	1851.1	1847.5	1846.0	1847.5	1844.4	1842.4
20°	1859.3	1858.3	1858.8	1857.2	1855.2	1855.2	1852.6	1851.6	1852.1	1851.6	1846.0
22.5°	1865.4	1865.4	1866.5	1866.0	1865.4	1866.0	1863.9	1863.9	1864.4	1864.4	1859.8
25°	1883.0	1882.4	1883.4	1883.4	1884.0	1887.5	1886.0	1885.5	1888.0	1888.0	1883.4
27.5°	1915.7	1914.7	1915.8	1916.8	1919.4	1924.0	1922.9	1924.4	1928.6	1927.5	1923.4
30°	1953.7	1952.7	1955.2	1958.4	1960.4	1967.6	1964.5	1972.2	1975.8	1978.8	1975.8
32.5°	2009.2	2009.1	2013.7	2015.8	2020.4	2027.6	2028.6	2034.8	2039.4	2044.5	2040.9
35°	2083.0	2082.0	2085.6	2089.2	2094.8	2101.5	2104.0	2112.2	2119.4	2123.0	2116.3
37.5°	2195.9	2190.2	2196.9	2199.0	2203.6	2205.1	2212.3	2222.5	2230.2	2229.2	2224.6
40°	2348.8	2347.7	2345.2	2342.0	2349.3	2351.8	2351.8	2365.7	2378.0	2375.9	2375.4
42.5°	2527.3	2522.7	2519.6	2519.6	2523.7	2524.8	2540.6	2550.9	2559.6	2561.7	2559.6
45°	2719.2	2714.6	2715.6	2713.5	2715.0	2721.8	2731.0	2750.0	2766.4	2766.9	2758.2
47.5°	2925.4	2911.0	2922.3	2906.4	2916.2	2921.3	2944.4	2972.1	3000.8	3006.0	2998.3
50°	3134.8	3133.2	3132.2	3129.1	3133.7	3145.0	3173.2	3216.9	3244.6	3263.0	3250.7
52.5°	3363.6	3355.9	3352.3	3347.2	3351.8	3373.8	3413.3	3451.3	3501.1	3522.1	3505.2
55°	3586.2	3583.7	3570.3	3569.8	3579.6	3614.0	3657.0	3703.8	3757.6	3781.2	3775.0
57.5°	3815.0	3800.2	3796.0	3789.9	3809.4	3841.7	3894.6	3978.7	4034.6	4061.3	4046.0
60°	4038.8	4027.4	4018.7	4016.7	4030.0	4075.2	4151.1	4252.2	4321.4	4356.3	4331.7
62.5°	4278.9	4271.7	4261.4	4249.6	4277.8	4335.8	4430.2	4542.0	4644.2	4687.2	4649.8
65°	4577.5	4562.6	4551.3	4536.4	4559.5	4632.3	4750.9	4908.4	5045.4	5095.7	5069.0
67.5°	4892.5	4878.6	4879.6	4870.4	4911.4	5012.5	5165.4	5379.4	5563.0	5648.7	5598.4
70°	5167.4	5175.2	5177.2	5214.6	5285.5	5439.4	5693.8	6028.9	6307.5	6438.3	6384.4
71°	5086.4	5103.3	5129.5	5168.5	5290.6	5472.8	5820.0	6225.9	6558.4	6780.0	6705.6
72.5°	4856.6	4866.8	4880.2	4939.7	5077.7	5318.8	5676.4	6140.2	6567.6	6854.4	6768.2
75°	4524.1	4533.8	4538.5	4580.0	4705.7	4916.0	5243.4	5654.9	6032.0	6276.2	6252.0
77.5°	4022.4	4023.8	4059.8	4123.9	4265.0	4505.6	4850.4	5277.2	5631.8	5821.6	5701.0
80°	2888.5	2869.0	2905.9	2988.5	3163.0	3439.0	3792.0	4279.4	4672.9	4850.4	4663.6
82.5°	1099.0	1158.5	1252.4	1388.9	1447.8	1754.6	2084.0	2370.3	2701.7	3072.2	2979.3
85°	118.0	132.9	166.7	206.8	261.2	361.2	499.2	681.3	839.8	987.1	876.3
87.5°	44.2	45.2	50.3	58.0	59.0	61.6	65.7	76.4	71.3	61.6	49.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P148592

CATALOG NUMBER: AVM-E06-LED-E-U-5XQ-7060

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2	1855.2
2.5°	1855.2	1855.7	1855.2	1855.7	1855.7	1853.7	1854.2	1853.2
5°	1854.7	1853.2	1853.7	1854.2	1853.7	1854.7	1853.2	1854.2
7.5°	1852.1	1849.0	1850.1	1850.1	1849.0	1850.6	1849.6	1849.0
10°	1847.0	1842.9	1845.0	1843.9	1843.4	1843.9	1843.9	1843.9
12.5°	1842.4	1839.8	1840.3	1839.8	1839.3	1840.8	1840.3	1840.8
15°	1841.4	1837.2	1836.7	1835.7	1836.2	1837.2	1837.2	1838.8
17.5°	1840.3	1835.2	1834.7	1833.6	1834.2	1836.2	1836.7	1835.7
20°	1843.4	1839.3	1838.3	1837.2	1836.7	1839.3	1838.8	1838.8
22.5°	1857.8	1852.6	1852.1	1848.0	1846.5	1848.0	1847.0	1847.0
25°	1880.9	1874.7	1872.6	1867.0	1862.9	1862.9	1861.4	1860.3
27.5°	1922.4	1913.2	1911.1	1906.5	1900.8	1901.9	1898.8	1898.3
30°	1970.6	1962.4	1955.2	1948.6	1941.9	1939.4	1935.8	1935.2
32.5°	2033.7	2024.5	2015.8	2007.6	1998.3	1994.8	1988.6	1985.5
35°	2111.2	2098.9	2088.6	2083.0	2073.8	2069.2	2065.1	2069.6
37.5°	2219.5	2204.6	2199.4	2192.8	2186.6	2179.4	2181.0	2179.4
40°	2369.2	2355.9	2350.8	2339.0	2337.4	2329.2	2334.4	2329.3
42.5°	2554.5	2529.9	2526.3	2517.0	2513.9	2509.4	2511.4	2507.8
45°	2756.1	2734.1	2730.0	2715.0	2715.6	2704.8	2708.9	2709.0
47.5°	2982.9	2959.8	2940.8	2930.0	2926.0	2919.3	2922.9	2922.4
50°	3216.8	3185.5	3164.5	3143.5	3134.2	3136.8	3129.6	3141.9
52.5°	3468.2	3421.6	3391.8	3371.8	3354.4	3357.9	3359.0	3362.5
55°	3728.3	3668.8	3625.7	3599.6	3583.6	3584.7	3589.4	3593.4
57.5°	3990.0	3915.6	3857.2	3818.1	3807.9	3812.5	3812.5	3812.0
60°	4261.4	4172.2	4096.7	4052.6	4043.4	4040.8	4060.8	4054.2
62.5°	4552.8	4445.6	4367.6	4311.2	4297.8	4307.1	4325.0	4320.9
65°	4939.1	4790.9	4690.4	4634.4	4611.8	4621.0	4645.2	4644.2
67.5°	5437.4	5230.1	5097.2	5025.4	5008.9	5020.2	5033.6	5046.4
70°	6182.3	5886.2	5696.4	5541.0	5474.3	5461.4	5474.8	5475.3
71°	6444.5	6104.3	5802.1	5612.3	5503.0	5456.8	5460.4	5437.4
72.5°	6433.7	6014.5	5661.0	5462.5	5310.6	5273.7	5255.7	5228.0
75°	6000.2	5622.6	5315.8	5099.2	4953.0	4909.4	4877.6	4876.0
77.5°	5441.4	5162.8	4824.7	4595.4	4417.4	4345.0	4312.7	4311.7
80°	4374.3	3957.2	3709.9	3571.8	3356.9	3294.8	3229.1	3204.5
82.5°	2645.3	2067.1	1680.8	1493.5	1389.9	1144.6	1027.2	971.8
85°	616.2	437.6	301.7	198.0	142.6	113.4	87.2	77.0
87.5°	41.6	32.8	29.2	23.6	18.0	17.4	10.8	9.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)