

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P150891

Luminaire Tested: **AVS-E02-LED-E-U-SL3-HSS-7050**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P150891
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33727)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E02-LED-E-U-SL3-HSS-7050
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 3 W/ SPILL LIGHT CONTROL AND HOUSE SIDE SHIELD
Light Source: (42) 5000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3558.2 lumens
Efficiency: N/A
Efficacy: 68.3 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type III - Short - Non-Cutoff
BUG Rating: B0 - U0 - G1


Input Watts (W): 52.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P150891
 CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

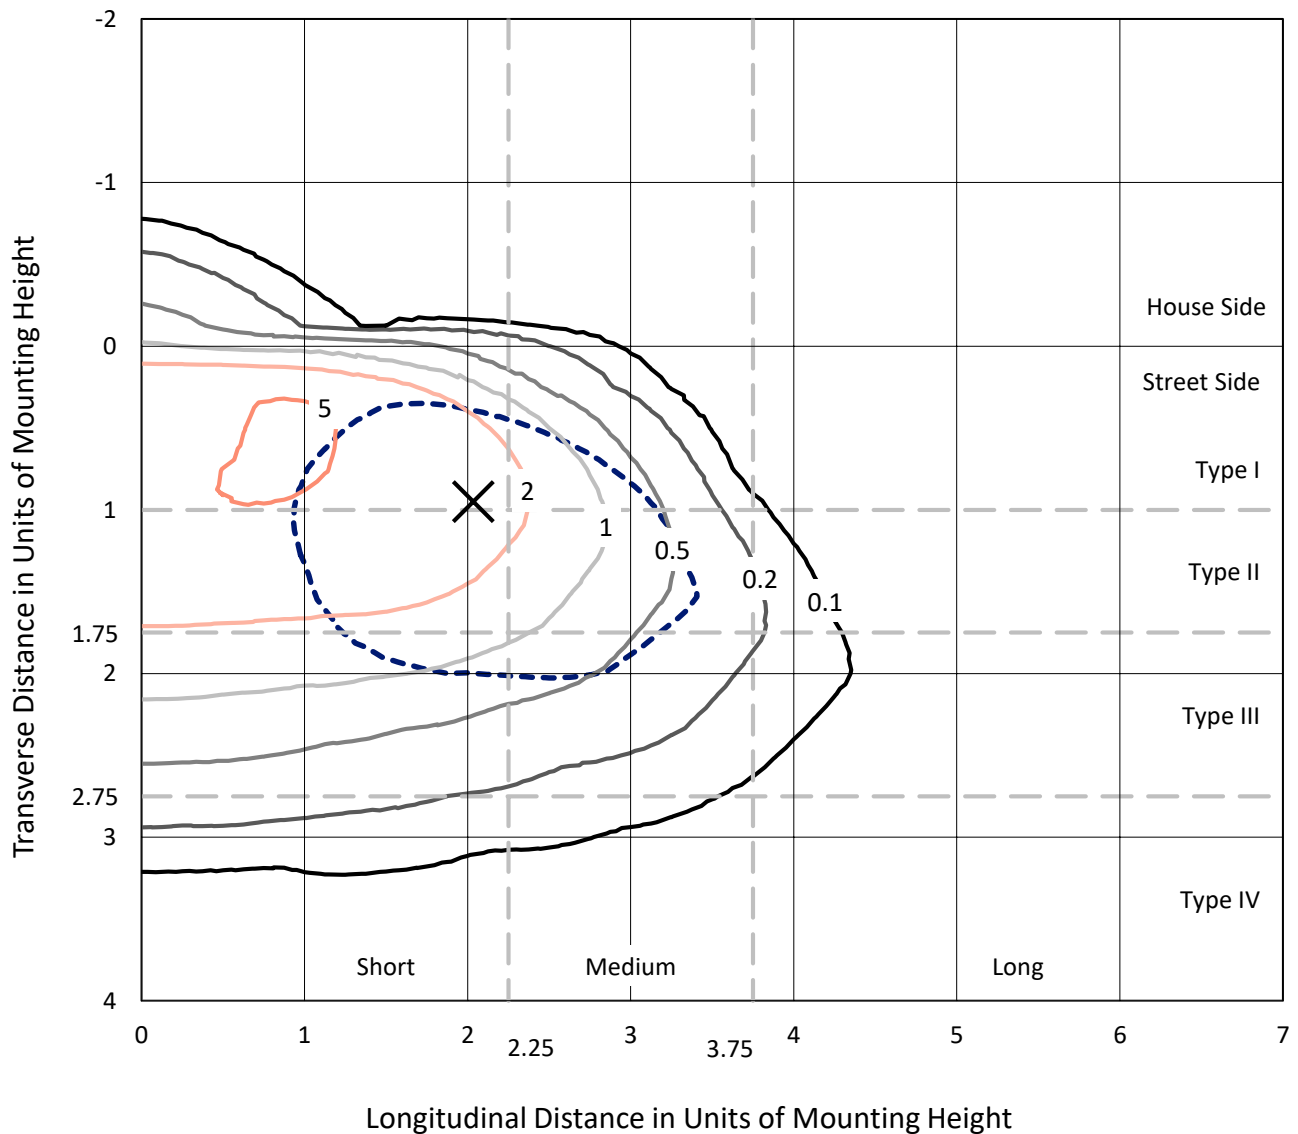

Based on 10 foot mounting height. Maximum calculated value = 5.9 fc
 Type III - Short - Non-Cutoff

REPORT NUMBER: P150891
CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

Luminous Intensity Polar Plot

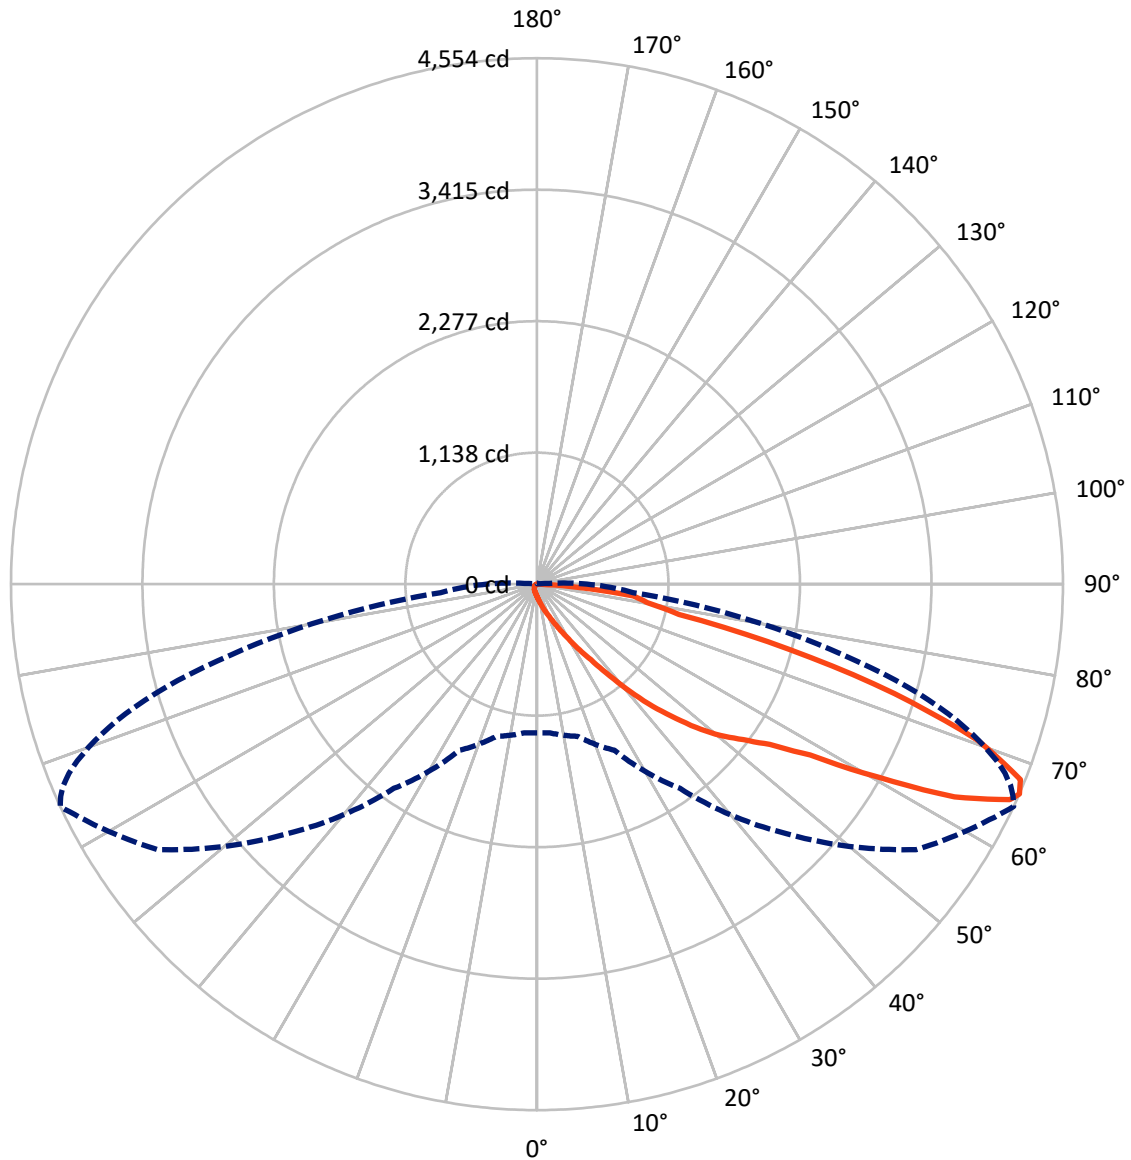

— Vertical Plane Through 65-Deg Lateral - - - Horizontal Cone Through 66-Deg Vertical

REPORT NUMBER: P150891

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	77.1	0.0	77.1
	% Fixture	2.2	0.0	2.2
Street Side	Lumens	3481.1	0.0	3481.1
	% Fixture	97.8	0.0	97.8
Total	Lumens	3558.2	0.0	3558.2
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.0	0.3
10°-20°	51.0	1.4
20°-30°	109.9	3.1
30°-40°	234.8	6.6
40°-50°	519.3	14.6
50°-60°	880.0	24.7
60°-70°	1174.3	33.0
70°-80°	517.3	14.5
80°-90°	59.6	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3558.2	100.0
0°-180°	3558.2	100.0

Coefficient of Utilization

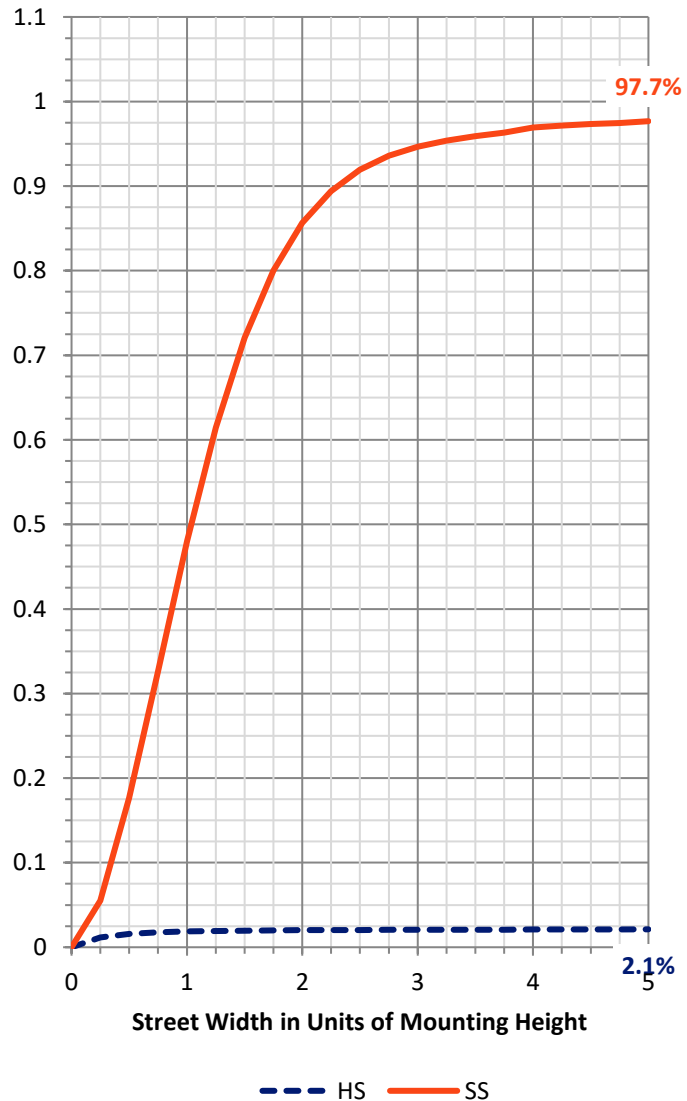

REPORT NUMBER: P150891


CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	148.6	4.2			
FM	(30°-60°)	1600.2	45.0			
FH	(60°-80°)	1675.0	47.1			G1/1800
FVH	(80°-90°)	57.2	1.6			G1/100
BL	(0°-30°)	24.3	0.7	B0/110		
BM	(30°-60°)	33.9	1.0	B0/220		
BH	(60°-80°)	16.5	0.5	B0/110		G0/110
BVH	(80°-90°)	2.4	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type III Short

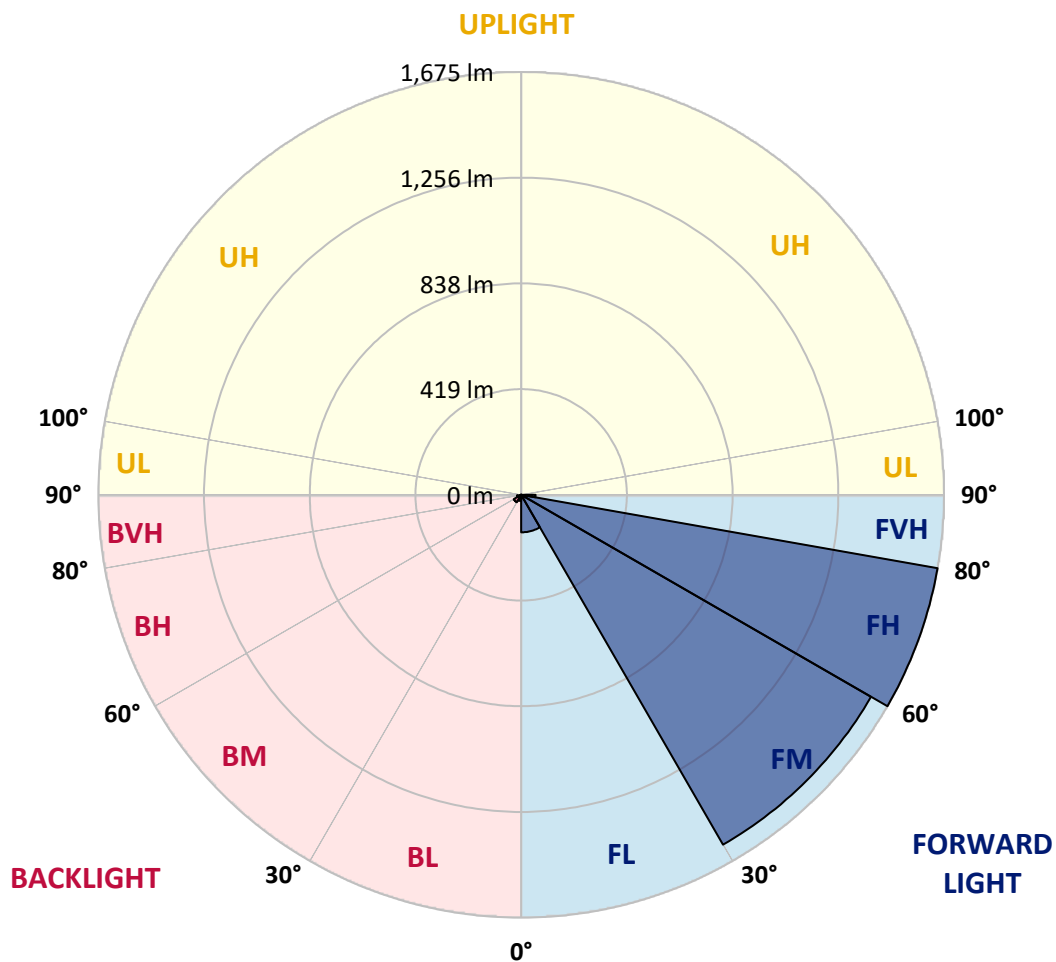



REPORT NUMBER: P150891

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	66°	67°	68°
0°	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4
2.5°	135.4	134.7	132.0	132.0	127.9	125.2	121.8	118.3	118.3	117.6	117.0
5°	179.3	175.1	174.4	166.9	160.7	151.8	143.6	132.7	131.3	129.9	129.3
7.5°	227.8	227.2	220.9	212.0	199.8	183.3	166.9	149.1	146.4	145.0	142.3
10°	290.8	287.4	279.1	264.0	245.6	223.7	197.0	169.0	165.6	162.8	161.5
12.5°	350.9	344.8	340.0	320.8	297.6	265.4	233.3	193.0	190.2	186.7	181.2
15°	407.0	401.6	393.4	376.9	350.9	310.6	273.0	223.7	216.9	212.0	208.0
17.5°	450.8	447.4	437.8	419.4	391.3	355.8	310.6	255.1	249.6	243.5	236.0
20°	492.5	487.8	472.6	447.4	417.3	389.9	355.0	296.2	288.7	281.1	273.0
22.5°	532.2	527.5	502.8	461.0	428.9	417.3	405.0	342.7	331.1	325.0	316.7
25°	587.6	577.3	539.1	472.6	429.6	438.4	459.7	402.9	392.0	383.1	370.1
27.5°	662.2	648.5	588.3	489.8	432.3	461.8	522.6	476.1	464.5	454.2	439.9
30°	746.3	737.4	665.6	530.9	452.1	496.0	593.1	569.1	555.4	543.1	526.0
32.5°	831.2	818.9	747.7	608.8	505.5	562.3	681.3	677.2	659.5	647.8	629.3
35°	905.7	899.6	846.8	736.8	627.3	678.5	799.0	803.8	788.1	775.8	755.2
37.5°	956.4	956.4	946.1	874.2	820.9	859.2	972.0	972.7	957.0	929.0	918.8
40°	982.3	989.8	1026.8	1040.5	1037.7	1086.9	1199.2	1186.8	1173.9	1159.5	1125.3
42.5°	1035.6	1042.5	1121.1	1215.5	1277.2	1342.2	1419.5	1415.3	1399.6	1373.6	1342.2
45°	1126.0	1134.9	1228.6	1378.4	1505.0	1597.3	1646.5	1627.4	1611.7	1587.0	1570.7
47.5°	1240.9	1258.0	1364.0	1549.4	1702.0	1854.5	1905.8	1855.2	1841.6	1822.4	1795.6
50°	1363.3	1379.8	1492.6	1704.7	1877.1	2059.1	2144.6	2059.1	2039.2	2033.1	2003.0
52.5°	1469.4	1483.1	1591.8	1824.5	2011.2	2224.6	2349.1	2236.3	2221.9	2201.3	2179.5
55°	1532.3	1543.2	1645.2	1881.9	2102.2	2373.7	2546.8	2447.6	2426.4	2418.2	2386.7
57.5°	1553.6	1564.5	1656.2	1889.4	2151.4	2509.8	2786.9	2790.4	2765.0	2735.6	2726.0
60°	1553.6	1565.8	1643.1	1870.9	2199.3	2654.9	3107.0	3392.3	3337.6	3332.1	3297.2
62.5°	1489.2	1500.8	1578.9	1814.2	2263.6	2850.6	3553.1	4056.6	4040.8	4005.2	3947.8
65°	1349.6	1356.5	1433.2	1669.1	2239.0	3030.5	3939.6	4498.4	4473.2	4403.3	4329.4
66°	1286.7	1292.2	1364.0	1586.3	2158.2	3055.0	4008.0	4553.9	4512.1	4453.3	4369.8
67.5°	1195.8	1205.3	1256.0	1432.4	1964.7	2969.5	3964.9	4514.8	4478.7	4407.5	4324.0
70°	798.3	791.5	970.1	1099.3	1496.8	2419.6	3557.2	4053.8	4054.5	4020.9	3987.5
72.5°	379.0	383.1	435.0	676.6	979.6	1616.5	2831.4	3235.6	3282.2	3222.0	3180.2
75°	272.2	278.4	309.8	413.9	584.1	970.1	1835.3	2262.9	2264.2	2157.5	2062.5
77.5°	79.4	82.8	116.3	255.1	437.8	654.6	1054.2	1258.0	1228.6	1152.0	1080.1
80°	32.8	32.8	34.2	81.5	175.9	444.7	737.4	968.6	965.2	935.9	893.4
82.5°	12.3	13.0	16.4	33.5	41.8	109.4	491.8	840.7	838.7	796.9	766.8
85°	1.3	1.3	4.1	14.4	15.8	20.5	98.5	370.8	368.7	370.8	325.0
87.5°	0.0	0.0	0.7	1.3	2.1	2.7	4.1	14.4	15.8	15.0	13.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150891
 CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

CANDELA DISTRIBUTION (continued):

	69°	70°	71°	72°	73°	74°	75°	76°	77°	78°	79°
0°	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4
2.5°	117.0	115.6	115.6	114.9	114.9	114.9	114.2	113.6	113.6	112.8	112.2
5°	127.9	126.5	125.9	124.5	123.8	123.1	121.8	121.0	119.7	119.1	118.3
7.5°	140.9	138.1	137.5	135.4	133.4	132.0	130.7	128.6	127.3	124.5	123.8
10°	157.3	153.9	151.2	148.4	146.4	143.0	140.9	138.1	135.4	133.4	131.3
12.5°	178.5	173.8	169.6	166.9	162.2	158.0	153.9	151.8	146.4	143.6	140.2
15°	201.8	196.4	191.5	186.1	182.7	175.9	170.4	164.1	161.5	156.7	151.2
17.5°	231.9	223.0	215.4	210.1	203.2	196.4	190.2	184.0	175.9	170.4	163.5
20°	264.0	256.5	246.2	236.7	228.5	220.3	211.4	203.2	195.6	186.7	178.5
22.5°	305.1	294.2	281.9	272.2	261.3	252.4	240.1	229.1	216.9	205.2	195.6
25°	357.1	342.7	331.1	317.4	304.5	290.8	275.6	262.0	246.2	235.3	218.9
27.5°	421.3	407.7	392.0	374.2	361.1	340.6	320.8	303.7	285.3	268.2	249.6
30°	503.5	483.6	467.3	450.2	424.1	404.2	381.0	357.7	332.4	315.3	287.4
32.5°	602.0	580.7	556.2	531.5	507.6	479.5	450.8	422.1	394.0	362.6	333.8
35°	722.4	697.1	669.0	642.4	605.4	575.3	539.1	499.4	467.9	431.6	395.4
37.5°	881.8	840.0	815.4	787.4	737.4	696.4	656.1	616.4	560.9	522.6	471.3
40°	1081.6	1056.9	1016.5	971.4	926.2	872.2	817.5	764.8	700.5	647.2	587.6
42.5°	1316.2	1279.9	1238.9	1173.9	1128.1	1064.5	1002.2	932.4	853.7	785.3	715.5
45°	1536.4	1493.4	1461.9	1396.9	1349.0	1273.8	1198.4	1124.7	1033.7	945.4	864.7
47.5°	1774.5	1738.9	1686.9	1634.2	1585.7	1500.8	1419.5	1329.8	1234.1	1129.4	1024.8
50°	1983.8	1955.8	1920.2	1856.6	1802.5	1731.4	1635.6	1537.8	1416.7	1312.7	1193.7
52.5°	2161.7	2139.8	2089.8	2044.7	1996.2	1929.1	1843.5	1749.8	1619.2	1505.0	1369.5
55°	2371.7	2356.0	2312.1	2284.1	2241.0	2176.7	2096.7	2009.8	1871.6	1747.2	1593.9
57.5°	2715.8	2703.4	2665.2	2653.5	2611.1	2555.0	2456.5	2363.4	2202.1	2047.5	1872.3
60°	3285.6	3260.9	3204.9	3176.2	3086.5	3011.3	2883.3	2755.4	2560.5	2363.4	2152.7
62.5°	3895.8	3826.7	3720.0	3628.3	3501.0	3370.4	3199.4	3003.7	2775.2	2541.3	2299.2
65°	4224.8	4107.2	3972.4	3826.7	3661.9	3469.6	3254.1	3019.5	2773.9	2526.9	2271.1
66°	4262.5	4129.7	3986.7	3824.7	3641.3	3436.8	3217.8	2971.6	2716.5	2475.6	2219.8
67.5°	4215.2	4076.4	3925.2	3745.3	3546.9	3334.8	3105.0	2849.1	2603.5	2359.4	2110.4
70°	3884.9	3746.6	3611.9	3422.4	3211.0	2997.6	2780.1	2494.1	2261.6	2037.2	1815.5
72.5°	3102.3	3008.5	2875.1	2713.1	2507.2	2256.8	2075.4	1819.6	1617.8	1400.3	1228.6
75°	1938.7	1806.6	1641.8	1435.1	1277.8	1074.7	968.6	774.4	659.5	558.9	461.8
77.5°	991.2	892.0	776.4	660.1	548.6	437.8	338.7	239.4	161.5	112.2	83.4
80°	818.9	731.3	635.5	529.4	431.0	334.5	240.8	164.1	104.7	68.4	53.4
82.5°	676.6	602.7	517.2	418.7	333.2	262.7	182.7	119.1	73.9	47.9	37.6
85°	288.0	261.3	201.8	160.1	120.4	88.9	62.3	41.8	29.4	23.9	21.9
87.5°	12.3	13.7	13.0	10.3	7.6	7.6	6.8	5.5	5.5	5.5	5.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150891

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

CANDELA DISTRIBUTION (continued):

	80°	81°	82°	83°	84°	85°	95°	105°	115°	125°	135°
0°	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4	107.4
2.5°	112.2	111.5	110.8	110.8	110.2	109.4	105.4	102.0	97.8	95.1	92.3
5°	117.0	116.3	114.9	114.2	112.8	112.2	103.3	95.8	89.6	84.9	81.5
7.5°	121.8	121.0	119.1	117.0	116.3	114.9	100.5	91.0	82.8	77.3	73.9
10°	127.9	125.9	123.8	121.0	119.1	117.0	97.8	85.5	76.6	71.8	68.4
12.5°	136.8	133.4	129.9	126.5	123.8	120.4	96.5	80.7	71.8	66.3	62.9
15°	147.0	142.3	138.1	134.1	129.3	125.9	93.7	76.6	67.8	62.3	58.1
17.5°	156.7	151.2	145.0	138.9	134.1	129.3	91.0	72.5	63.6	58.1	54.1
20°	170.4	162.2	154.6	147.0	140.2	134.1	86.8	68.4	60.2	54.1	49.9
22.5°	185.4	175.9	166.2	156.0	147.0	138.9	83.4	65.0	56.8	50.6	45.8
25°	204.6	193.0	179.9	166.9	156.7	145.7	80.0	61.6	53.4	47.2	42.4
27.5°	231.2	214.8	200.4	184.0	168.3	156.0	77.3	58.9	49.9	43.7	39.0
30°	267.5	243.5	220.9	203.2	184.7	166.9	74.6	55.4	47.2	40.3	34.9
32.5°	307.9	279.8	253.8	227.2	203.8	183.3	71.8	52.6	43.7	36.9	32.1
35°	357.7	322.2	287.4	256.5	228.5	201.1	69.1	49.9	41.0	33.5	28.7
37.5°	429.6	385.2	339.3	299.6	263.3	227.2	67.0	47.2	37.6	30.1	25.3
40°	528.1	470.7	414.5	360.5	313.3	268.2	64.4	44.5	34.9	27.4	22.6
42.5°	634.8	565.1	491.2	430.3	365.3	308.5	61.6	41.8	32.1	24.7	19.8
45°	767.6	680.6	591.1	508.3	428.9	355.8	58.9	39.0	28.7	21.9	17.1
47.5°	912.5	801.8	700.5	596.5	502.1	414.5	55.4	36.9	26.0	19.2	15.0
50°	1061.7	944.7	816.8	698.4	586.2	473.4	52.0	33.5	23.2	17.1	12.3
52.5°	1222.4	1084.2	953.6	806.5	675.9	550.7	48.6	30.8	21.2	15.0	10.3
55°	1426.9	1272.3	1119.2	954.3	796.9	640.3	45.2	27.4	18.4	13.0	8.2
57.5°	1684.1	1500.8	1312.7	1126.6	935.9	757.9	42.4	23.9	15.8	11.0	6.8
60°	1927.0	1713.0	1485.1	1271.0	1055.5	848.3	38.3	21.2	13.7	8.9	6.8
62.5°	2052.8	1808.7	1563.1	1327.0	1097.2	880.4	34.2	17.8	11.6	7.6	6.1
65°	2022.1	1773.2	1535.0	1297.0	1071.9	859.9	30.1	15.8	10.3	6.8	6.1
66°	1977.6	1731.4	1491.9	1265.5	1050.8	838.0	28.1	15.0	9.5	6.8	5.5
67.5°	1880.5	1642.5	1414.0	1203.3	992.5	796.3	25.3	13.7	8.9	6.1	5.5
70°	1606.2	1390.1	1207.4	1020.0	848.3	671.1	20.5	11.6	7.6	5.5	5.5
72.5°	1063.0	916.0	794.2	683.4	571.2	443.3	17.1	9.5	6.1	5.5	4.8
75°	400.8	362.6	311.3	279.8	244.2	214.1	13.7	6.1	4.8	4.8	4.8
77.5°	71.2	65.7	58.1	53.4	49.2	45.2	11.0	4.1	4.1	4.8	4.8
80°	47.9	44.5	40.3	36.9	34.2	30.8	7.6	3.4	4.1	4.1	4.8
82.5°	34.2	32.1	30.1	27.4	25.3	22.6	4.8	3.4	4.1	4.1	4.1
85°	20.5	19.2	17.8	16.4	14.4	13.7	3.4	3.4	3.4	4.1	4.1
87.5°	5.5	4.8	5.5	5.5	4.1	4.8	2.7	2.7	2.7	3.4	3.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150891

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7050

CANDELA DISTRIBUTION (continued):

	145°	155°	165°	175°	180°
0°	107.4	107.4	107.4	107.4	107.4
2.5°	91.0	91.0	89.6	91.7	91.7
5°	78.7	78.7	78.0	78.7	78.7
7.5°	71.8	71.2	71.2	71.2	71.8
10°	65.7	65.0	65.0	65.0	65.0
12.5°	60.2	59.5	58.9	59.5	59.5
15°	55.4	54.1	54.1	54.1	54.1
17.5°	51.3	49.9	49.2	49.2	49.2
20°	47.2	45.2	45.2	45.2	45.2
22.5°	43.1	41.0	41.0	41.0	41.0
25°	39.0	36.9	36.9	36.9	36.9
27.5°	35.5	33.5	33.5	33.5	33.5
30°	31.5	30.1	30.1	30.8	30.1
32.5°	28.7	26.6	26.6	27.4	27.4
35°	25.3	23.9	23.9	23.9	23.9
37.5°	21.9	20.5	20.5	20.5	20.5
40°	19.2	17.8	17.1	17.8	17.8
42.5°	16.4	15.0	14.4	14.4	14.4
45°	14.4	12.3	11.6	12.3	12.3
47.5°	11.6	10.3	10.3	11.0	11.0
50°	8.9	8.9	9.5	11.0	11.0
52.5°	8.2	8.2	9.5	11.0	11.0
55°	7.6	8.2	9.5	10.3	11.0
57.5°	6.8	8.2	9.5	10.3	10.3
60°	6.8	7.6	8.9	10.3	10.3
62.5°	6.1	6.8	8.2	9.5	9.5
65°	6.1	6.8	8.2	9.5	9.5
66°	6.1	6.8	8.2	9.5	9.5
67.5°	6.1	6.8	8.2	9.5	9.5
70°	6.1	6.8	8.2	8.9	8.9
72.5°	5.5	6.1	7.6	8.9	8.9
75°	5.5	6.1	7.6	8.9	8.9
77.5°	5.5	6.1	7.6	8.9	8.9
80°	5.5	6.1	7.6	8.2	8.9
82.5°	4.8	6.1	6.8	8.2	8.2
85°	4.8	5.5	6.8	7.6	8.2
87.5°	4.1	4.8	5.5	6.8	6.8
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)