

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P150888

Luminaire Tested: **AVS-E02-LED-E-U-SL3-HSS-8030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P150888
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33727)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E02-LED-E-U-SL3-HSS-8030
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 3 W/ SPILL LIGHT CONTROL AND HOUSE SIDE SHIELD
Light Source: (42) 3000K CCT, 80 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2926.7 lumens
Efficiency: N/A
Efficacy: 56.2 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type III - Short - Non-Cutoff
BUG Rating: B0 - U0 - G1


Input Watts (W): 52.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P150888
 CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

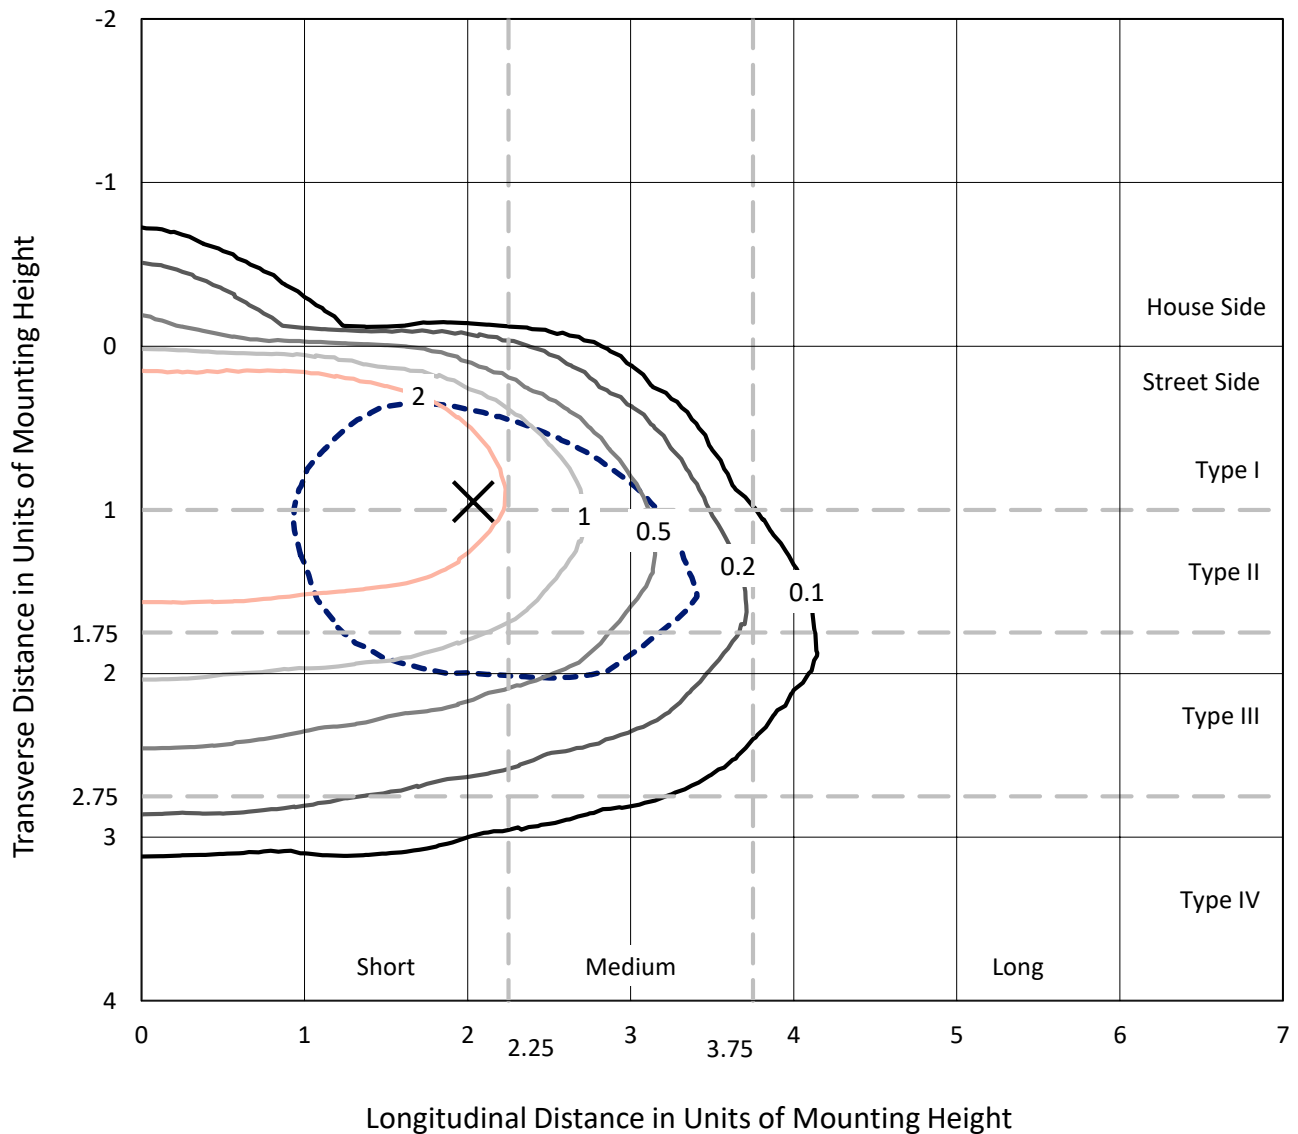

Based on 10 foot mounting height. Maximum calculated value = 4.8 fc
 Type III - Short - Non-Cutoff

REPORT NUMBER: P150888
CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

Luminous Intensity Polar Plot

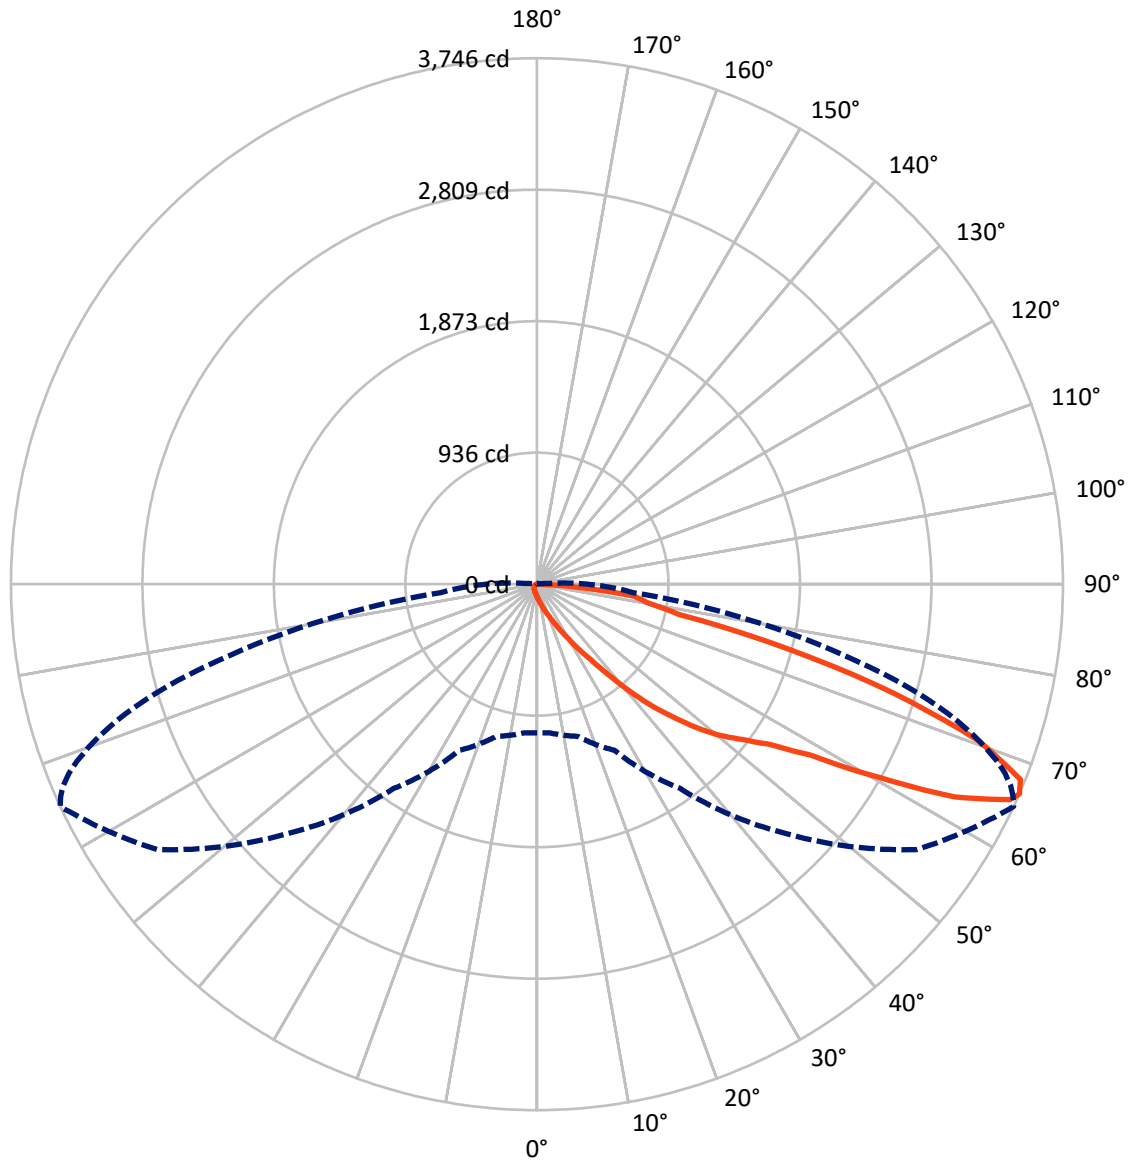

— Vertical Plane Through 65-Deg Lateral - - - Horizontal Cone Through 66-Deg Vertical

REPORT NUMBER: P150888

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	63.4	0.0	63.4
	% Fixture	2.2	0.0	2.2
Street Side	Lumens	2863.2	0.0	2863.2
	% Fixture	97.8	0.0	97.8
Total	Lumens	2926.7	0.0	2926.7
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	9.9	0.3
10°-20°	41.9	1.4
20°-30°	90.4	3.1
30°-40°	193.1	6.6
40°-50°	427.1	14.6
50°-60°	723.8	24.7
60°-70°	965.9	33.0
70°-80°	425.5	14.5
80°-90°	49.0	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2926.7	100.0
0°-180°	2926.7	100.0



REPORT NUMBER: P150888


CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	122.2	4.2			
FM	(30°-60°)	1316.2	45.0			
FH	(60°-80°)	1377.7	47.1			G1/1800
FVH	(80°-90°)	47.1	1.6			G1/100
BL	(0°-30°)	20.0	0.7	B0/110		
BM	(30°-60°)	27.8	1.0	B0/220		
BH	(60°-80°)	13.6	0.5	B0/110		G0/110
BVH	(80°-90°)	2.0	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type III Short

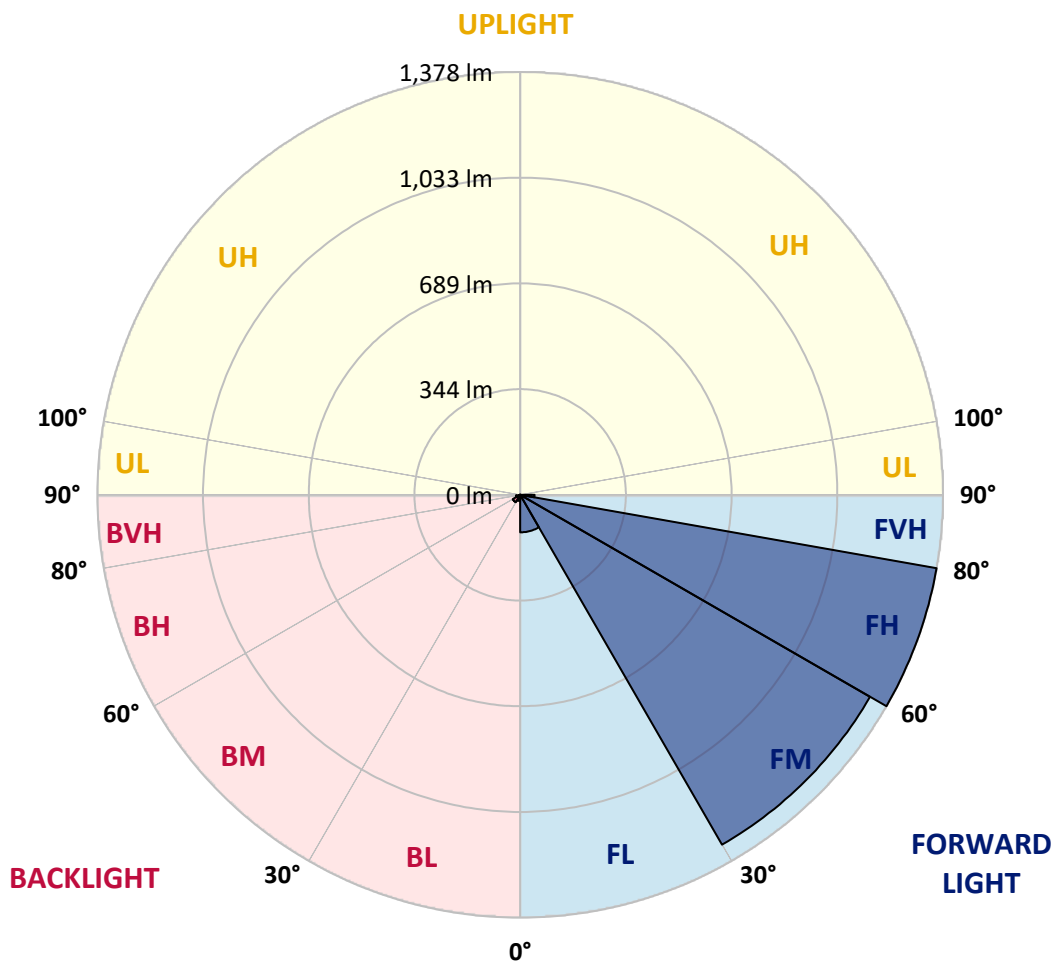



REPORT NUMBER: P150888

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	66°	67°	68°
0°	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
2.5°	111.4	110.9	108.6	108.6	105.2	103.0	100.1	97.3	97.3	96.8	96.2
5°	147.5	144.0	143.5	137.3	132.2	124.9	118.1	109.1	108.0	106.9	106.3
7.5°	187.4	186.8	181.8	174.4	164.2	150.8	137.3	122.7	120.4	119.3	117.0
10°	239.2	236.3	229.5	217.2	202.0	184.0	162.1	139.0	136.2	133.9	132.7
12.5°	288.6	283.6	279.7	263.9	244.8	218.3	191.9	158.7	156.4	153.6	149.1
15°	334.8	330.3	323.5	310.1	288.6	255.4	224.5	184.0	178.3	174.4	171.1
17.5°	370.8	368.0	360.1	344.9	321.9	292.5	255.4	209.8	205.4	200.3	194.1
20°	405.1	401.1	388.8	368.0	343.2	320.7	292.0	243.6	237.4	231.3	224.5
22.5°	437.7	433.8	413.6	379.3	352.7	343.2	333.1	281.9	272.3	267.3	260.5
25°	483.3	474.9	443.4	388.8	353.4	360.6	378.1	331.4	322.4	315.1	304.4
27.5°	544.7	533.4	483.9	402.9	355.6	379.8	429.8	391.6	382.1	373.6	361.8
30°	613.9	606.5	547.5	436.6	371.9	408.0	487.9	468.1	456.9	446.7	432.6
32.5°	683.6	673.5	615.0	500.7	415.9	462.5	560.4	557.0	542.4	532.8	517.6
35°	745.0	739.9	696.6	606.0	516.0	558.1	657.2	661.1	648.2	638.0	621.1
37.5°	786.6	786.6	778.1	719.1	675.2	706.7	799.6	800.1	787.2	764.0	755.6
40°	808.0	814.2	844.6	855.9	853.6	894.1	986.3	976.2	965.5	953.7	925.6
42.5°	851.9	857.5	922.2	999.9	1050.5	1103.9	1167.6	1164.1	1151.2	1129.8	1103.9
45°	926.1	933.5	1010.6	1133.8	1237.8	1313.8	1354.3	1338.5	1325.6	1305.4	1291.9
47.5°	1020.6	1034.7	1122.0	1274.4	1399.9	1525.4	1567.6	1525.9	1514.7	1499.0	1477.0
50°	1121.3	1134.9	1227.8	1402.2	1543.9	1693.6	1763.9	1693.6	1677.3	1672.2	1647.5
52.5°	1208.6	1219.9	1309.3	1500.6	1654.2	1829.7	1932.2	1839.4	1827.6	1810.7	1792.6
55°	1260.3	1269.3	1353.2	1547.9	1729.0	1952.4	2094.8	2013.2	1995.8	1989.0	1963.1
57.5°	1277.8	1286.8	1362.2	1554.1	1769.5	2064.4	2292.2	2295.1	2274.3	2250.1	2242.2
60°	1277.8	1288.0	1351.5	1538.9	1808.9	2183.7	2555.6	2790.3	2745.2	2740.7	2712.0
62.5°	1224.9	1234.5	1298.7	1492.1	1861.9	2344.6	2922.5	3336.6	3323.6	3294.4	3247.2
65°	1110.2	1115.8	1178.8	1372.8	1841.6	2492.5	3240.3	3700.1	3679.3	3621.9	3561.0
66°	1058.3	1062.9	1122.0	1304.8	1775.2	2512.8	3296.6	3745.6	3711.3	3662.9	3594.3
67.5°	983.5	991.4	1033.1	1178.2	1616.0	2442.5	3261.1	3713.6	3683.7	3625.2	3556.6
70°	656.6	651.0	797.8	904.1	1231.1	1990.2	2925.8	3334.3	3334.9	3307.4	3279.8
72.5°	311.7	315.1	357.8	556.5	805.7	1329.5	2328.8	2661.3	2699.7	2650.2	2615.9
75°	223.9	229.0	254.9	340.4	480.5	797.8	1509.6	1861.2	1862.4	1774.6	1696.4
77.5°	65.3	68.1	95.6	209.8	360.1	538.4	867.0	1034.7	1010.6	947.6	888.4
80°	27.0	27.0	28.1	66.9	144.6	365.7	606.5	796.7	793.9	769.7	734.8
82.5°	10.2	10.7	13.5	27.6	34.3	90.1	404.6	691.5	689.8	655.5	630.8
85°	1.1	1.1	3.4	11.8	13.0	16.9	81.0	305.0	303.3	305.0	267.3
87.5°	0.0	0.0	0.5	1.1	1.7	2.3	3.4	11.8	13.0	12.3	11.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150888

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (continued):

	69°	70°	71°	72°	73°	74°	75°	76°	77°	78°	79°
0°	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
2.5°	96.2	95.1	95.1	94.5	94.5	94.5	94.0	93.4	93.4	92.8	92.2
5°	105.2	104.0	103.5	102.4	101.9	101.2	100.1	99.6	98.4	97.9	97.3
7.5°	116.0	113.7	113.1	111.4	109.7	108.6	107.5	105.8	104.7	102.4	101.9
10°	129.4	126.6	124.4	122.1	120.4	117.6	116.0	113.7	111.4	109.7	108.0
12.5°	146.8	142.9	139.6	137.3	133.4	129.9	126.6	124.9	120.4	118.1	115.3
15°	166.0	161.5	157.5	153.1	150.3	144.6	140.1	135.0	132.7	128.8	124.4
17.5°	190.8	183.4	177.2	172.7	167.2	161.5	156.4	151.4	144.6	140.1	134.5
20°	217.2	211.0	202.6	194.7	188.0	181.1	173.9	167.2	160.9	153.6	146.8
22.5°	251.0	242.0	231.8	223.9	214.9	207.7	197.5	188.5	178.3	168.8	160.9
25°	293.7	281.9	272.3	261.0	250.4	239.2	226.7	215.5	202.6	193.6	180.0
27.5°	346.6	335.3	322.4	307.8	297.1	280.2	263.9	249.8	234.6	220.5	205.4
30°	414.1	397.8	384.2	370.3	348.8	332.5	313.4	294.3	273.5	259.4	236.3
32.5°	495.1	477.7	457.4	437.2	417.5	394.4	370.8	347.2	324.0	298.2	274.6
35°	594.2	573.4	550.3	528.3	497.9	473.2	443.4	410.8	384.9	355.0	325.2
37.5°	725.3	691.0	670.7	647.7	606.5	572.7	539.6	506.9	461.3	429.8	387.7
40°	889.5	869.3	836.1	799.0	761.9	717.4	672.3	629.0	576.2	532.2	483.3
42.5°	1082.6	1052.7	1019.0	965.5	927.9	875.5	824.2	766.9	702.2	645.9	588.5
45°	1263.7	1228.3	1202.4	1148.9	1109.5	1047.7	985.8	925.0	850.2	777.6	711.2
47.5°	1459.6	1430.3	1387.6	1344.1	1304.2	1234.5	1167.6	1093.8	1015.0	928.9	842.9
50°	1631.7	1608.6	1579.4	1527.0	1482.6	1424.1	1345.3	1264.9	1165.3	1079.8	981.9
52.5°	1778.0	1760.0	1719.0	1681.8	1641.9	1586.7	1516.4	1439.3	1331.8	1237.8	1126.4
55°	1950.8	1937.8	1901.8	1878.8	1843.3	1790.4	1724.6	1653.1	1539.5	1437.0	1311.0
57.5°	2233.8	2223.6	2192.1	2182.6	2147.7	2101.6	2020.5	1944.0	1811.2	1684.0	1540.0
60°	2702.5	2682.2	2636.1	2612.4	2538.8	2476.8	2371.6	2266.4	2106.0	1944.0	1770.7
62.5°	3204.4	3147.6	3059.8	2984.4	2879.7	2772.2	2631.6	2470.7	2282.7	2090.3	1891.1
65°	3475.0	3378.2	3267.4	3147.6	3011.9	2853.8	2676.6	2483.6	2281.6	2078.4	1868.1
66°	3505.9	3396.8	3279.2	3145.8	2995.0	2826.8	2646.7	2444.2	2234.3	2036.3	1825.8
67.5°	3467.2	3352.8	3228.5	3080.5	2917.4	2743.0	2553.9	2343.5	2141.5	1940.6	1735.9
70°	3195.3	3081.7	2970.9	2815.0	2641.1	2465.6	2286.6	2051.5	1860.2	1675.6	1493.3
72.5°	2551.7	2474.6	2364.9	2231.5	2062.2	1856.2	1707.2	1496.7	1330.7	1151.8	1010.6
75°	1594.6	1486.0	1350.4	1180.4	1051.1	883.9	796.7	636.9	542.4	459.7	379.8
77.5°	815.3	733.7	638.7	543.0	451.3	360.1	278.5	196.9	132.7	92.2	68.6
80°	673.5	601.5	522.7	435.5	354.5	275.1	198.0	135.0	86.1	56.3	43.9
82.5°	556.5	495.8	425.4	344.4	274.0	216.1	150.3	97.9	60.7	39.4	31.0
85°	236.9	214.9	166.0	131.7	99.1	73.2	51.2	34.3	24.1	19.7	18.0
87.5°	10.2	11.3	10.7	8.4	6.2	6.2	5.6	4.5	4.5	4.5	4.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150888

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (continued):

	80°	81°	82°	83°	84°	85°	95°	105°	115°	125°	135°
0°	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
2.5°	92.2	91.7	91.2	91.2	90.6	90.1	86.6	83.8	80.4	78.2	76.0
5°	96.2	95.6	94.5	94.0	92.8	92.2	85.0	78.8	73.7	69.7	66.9
7.5°	100.1	99.6	97.9	96.2	95.6	94.5	82.7	74.8	68.1	63.6	60.7
10°	105.2	103.5	101.9	99.6	97.9	96.2	80.4	70.4	63.0	59.1	56.3
12.5°	112.5	109.7	106.9	104.0	101.9	99.1	79.4	66.4	59.1	54.6	51.8
15°	120.9	117.0	113.7	110.3	106.3	103.5	77.1	63.0	55.8	51.2	47.9
17.5°	128.8	124.4	119.3	114.2	110.3	106.3	74.8	59.7	52.3	47.9	44.5
20°	140.1	133.4	127.2	120.9	115.3	110.3	71.5	56.3	49.5	44.5	41.0
22.5°	152.4	144.6	136.7	128.3	120.9	114.2	68.6	53.5	46.7	41.7	37.7
25°	168.2	158.7	148.0	137.3	128.8	119.9	65.8	50.7	43.9	38.9	34.9
27.5°	190.2	176.7	164.9	151.4	138.4	128.3	63.6	48.4	41.0	36.0	32.0
30°	220.0	200.3	181.8	167.2	151.9	137.3	61.3	45.6	38.9	33.2	28.7
32.5°	253.2	230.2	208.7	186.8	167.7	150.8	59.1	43.3	36.0	30.4	26.4
35°	294.3	265.0	236.3	211.0	188.0	165.4	56.8	41.0	33.8	27.6	23.6
37.5°	353.4	316.8	279.1	246.4	216.6	186.8	55.1	38.9	31.0	24.8	20.8
40°	434.4	387.2	340.9	296.5	257.7	220.5	52.8	36.6	28.7	22.5	18.5
42.5°	522.2	464.8	404.0	353.9	300.4	253.8	50.7	34.3	26.4	20.2	16.3
45°	631.3	559.9	486.1	418.0	352.7	292.5	48.4	32.0	23.6	18.0	14.1
47.5°	750.6	659.5	576.2	490.7	413.0	340.9	45.6	30.4	21.3	15.8	12.3
50°	873.3	777.0	671.8	574.5	482.2	389.3	42.8	27.6	19.2	14.1	10.2
52.5°	1005.5	891.8	784.4	663.4	556.0	453.0	40.0	25.3	17.4	12.3	8.4
55°	1173.7	1046.5	920.5	784.9	655.5	526.6	37.1	22.5	15.2	10.7	6.7
57.5°	1385.3	1234.5	1079.8	926.7	769.7	623.4	34.9	19.7	13.0	9.0	5.6
60°	1585.0	1408.9	1221.6	1045.4	868.2	697.7	31.5	17.4	11.3	7.4	5.6
62.5°	1688.5	1487.7	1285.7	1091.6	902.5	724.1	28.1	14.6	9.5	6.2	5.1
65°	1663.2	1458.4	1262.6	1066.8	881.7	707.3	24.8	13.0	8.4	5.6	5.1
66°	1626.6	1424.1	1227.2	1040.9	864.2	689.2	23.1	12.3	7.9	5.6	4.5
67.5°	1546.7	1351.0	1163.0	989.7	816.4	654.9	20.8	11.3	7.4	5.1	4.5
70°	1321.1	1143.3	993.1	839.0	697.7	552.0	16.9	9.5	6.2	4.5	4.5
72.5°	874.4	753.4	653.3	562.1	469.8	364.6	14.1	7.9	5.1	4.5	3.9
75°	329.7	298.2	256.1	230.2	200.8	176.1	11.3	5.1	3.9	3.9	3.9
77.5°	58.5	54.0	47.9	43.9	40.5	37.1	9.0	3.4	3.4	3.9	3.9
80°	39.4	36.6	33.2	30.4	28.1	25.3	6.2	2.8	3.4	3.4	3.9
82.5°	28.1	26.4	24.8	22.5	20.8	18.5	3.9	2.8	3.4	3.4	3.4
85°	16.9	15.8	14.6	13.5	11.8	11.3	2.8	2.8	2.8	3.4	3.4
87.5°	4.5	3.9	4.5	4.5	3.4	3.9	2.3	2.3	2.3	2.8	2.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150888

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (continued):

	145°	155°	165°	175°	180°
0°	88.3	88.3	88.3	88.3	88.3
2.5°	74.8	74.8	73.7	75.4	75.4
5°	64.7	64.7	64.1	64.7	64.7
7.5°	59.1	58.5	58.5	58.5	59.1
10°	54.0	53.5	53.5	53.5	53.5
12.5°	49.5	48.9	48.4	48.9	48.9
15°	45.6	44.5	44.5	44.5	44.5
17.5°	42.2	41.0	40.5	40.5	40.5
20°	38.9	37.1	37.1	37.1	37.1
22.5°	35.4	33.8	33.8	33.8	33.8
25°	32.0	30.4	30.4	30.4	30.4
27.5°	29.2	27.6	27.6	27.6	27.6
30°	25.9	24.8	24.8	25.3	24.8
32.5°	23.6	22.0	22.0	22.5	22.5
35°	20.8	19.7	19.7	19.7	19.7
37.5°	18.0	16.9	16.9	16.9	16.9
40°	15.8	14.6	14.1	14.6	14.6
42.5°	13.5	12.3	11.8	11.8	11.8
45°	11.8	10.2	9.5	10.2	10.2
47.5°	9.5	8.4	8.4	9.0	9.0
50°	7.4	7.4	7.9	9.0	9.0
52.5°	6.7	6.7	7.9	9.0	9.0
55°	6.2	6.7	7.9	8.4	9.0
57.5°	5.6	6.7	7.9	8.4	8.4
60°	5.6	6.2	7.4	8.4	8.4
62.5°	5.1	5.6	6.7	7.9	7.9
65°	5.1	5.6	6.7	7.9	7.9
66°	5.1	5.6	6.7	7.9	7.9
67.5°	5.1	5.6	6.7	7.9	7.9
70°	5.1	5.6	6.7	7.4	7.4
72.5°	4.5	5.1	6.2	7.4	7.4
75°	4.5	5.1	6.2	7.4	7.4
77.5°	4.5	5.1	6.2	7.4	7.4
80°	4.5	5.1	6.2	6.7	7.4
82.5°	3.9	5.1	5.6	6.7	6.7
85°	3.9	4.5	5.6	6.2	6.7
87.5°	3.4	3.9	4.5	5.6	5.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)