

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P152033

Luminaire Tested: **AVS-F02-LED-E-U-SL4-HSS-8030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P152033
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33728)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-F02-LED-E-U-SL4-HSS-8030
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 4 W/ SPILL LIGHT CONTROL AND HOUSE SIDE SHIELD
Light Source: (14) 3000K CCT, 80 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2835.4 lumens
Efficiency: N/A
Efficacy: 51.6 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type IV - Short - Semi-Cutoff
BUG Rating: B0 - U0 - G1


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P152033
 CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

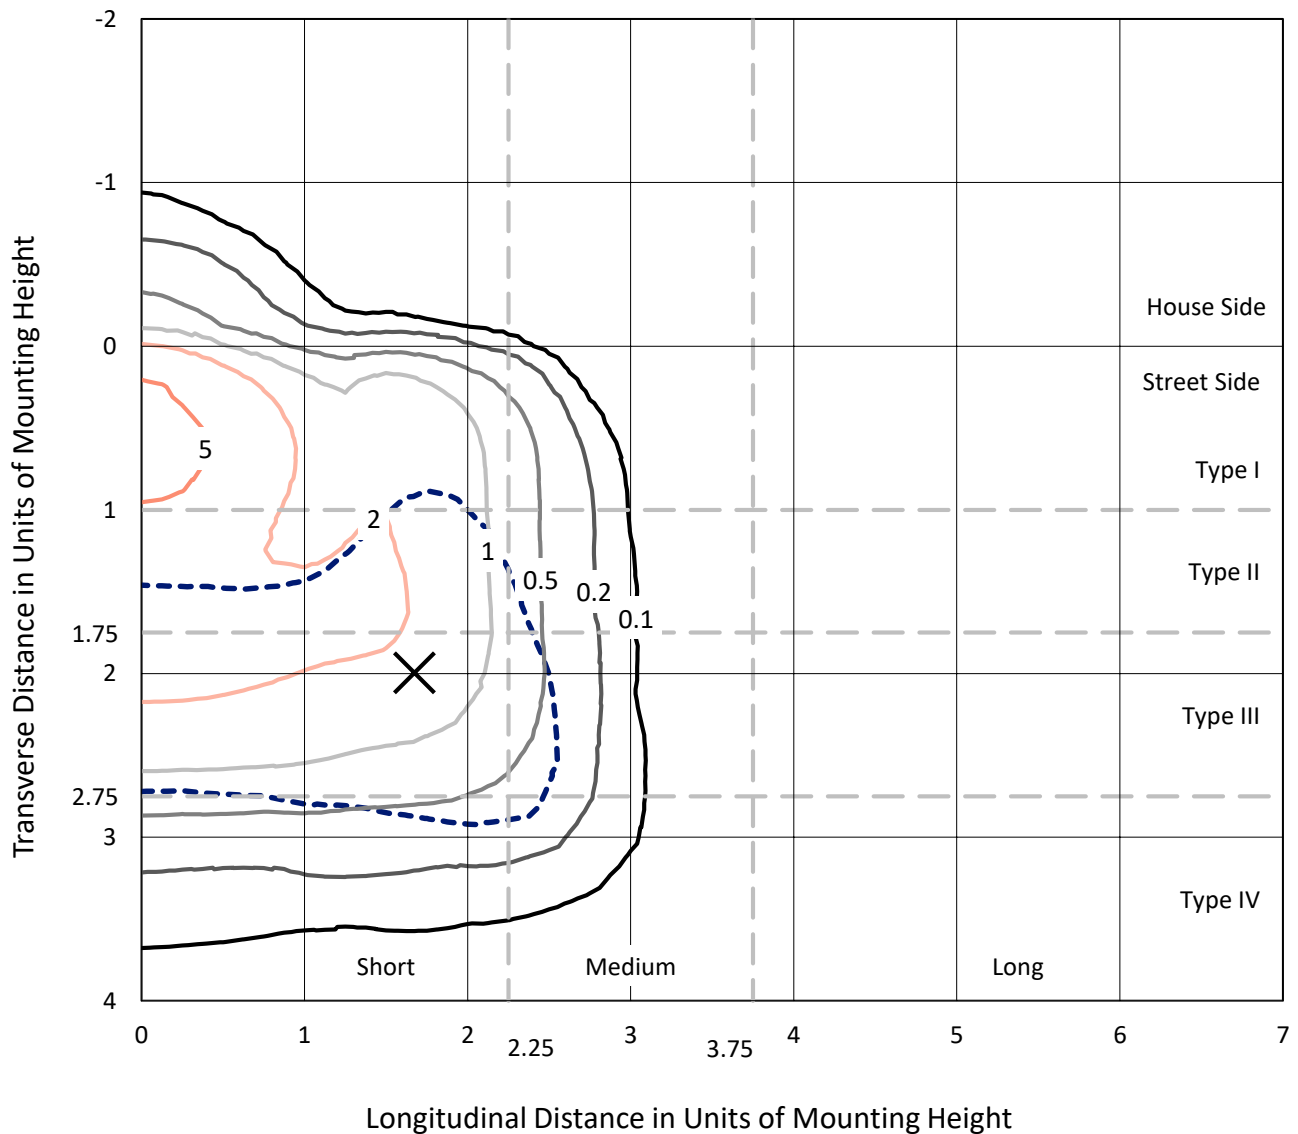

Based on 10 foot mounting height. Maximum calculated value = 6.3 fc
 Type IV - Short - Semi-Cutoff

REPORT NUMBER: P152033
CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

Luminous Intensity Polar Plot

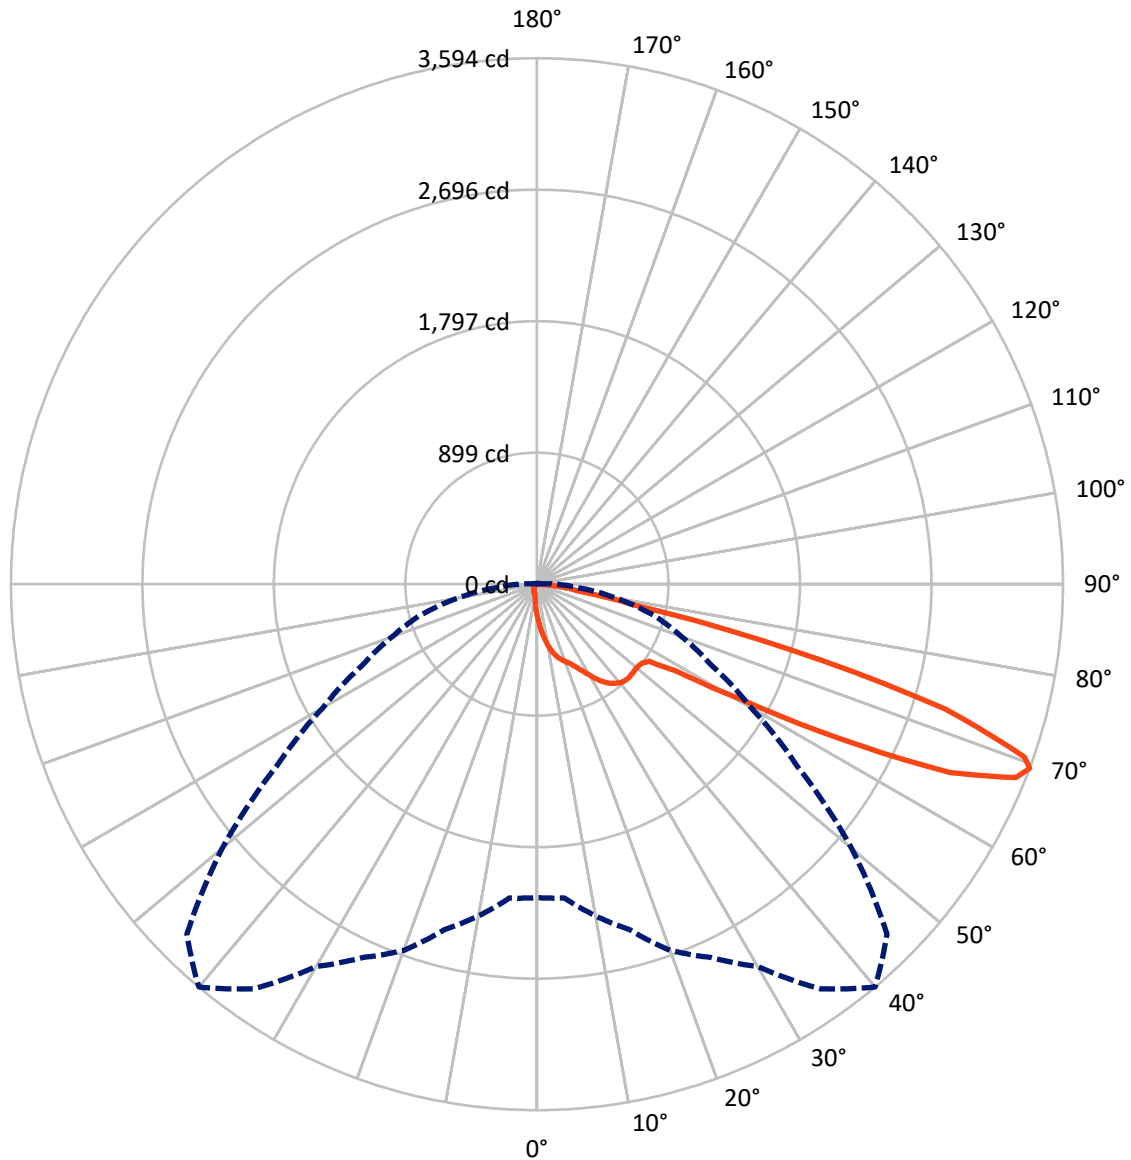

— Vertical Plane Through 40-Deg Lateral - - - Horizontal Cone Through 69-Deg Vertical

REPORT NUMBER: P152033

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	84.4	0.0	84.4
	% Fixture	3.0	0.0	3.0
Street Side	Lumens	2751.0	0.0	2751.0
	% Fixture	97.0	0.0	97.0
Total	Lumens	2835.4	0.0	2835.4
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.0	0.8
10°-20°	75.9	2.7
20°-30°	145.2	5.1
30°-40°	241.5	8.5
40°-50°	326.8	11.5
50°-60°	511.1	18.0
60°-70°	1050.9	37.1
70°-80°	422.8	14.9
80°-90°	39.1	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2835.4	100.0
0°-180°	2835.4	100.0

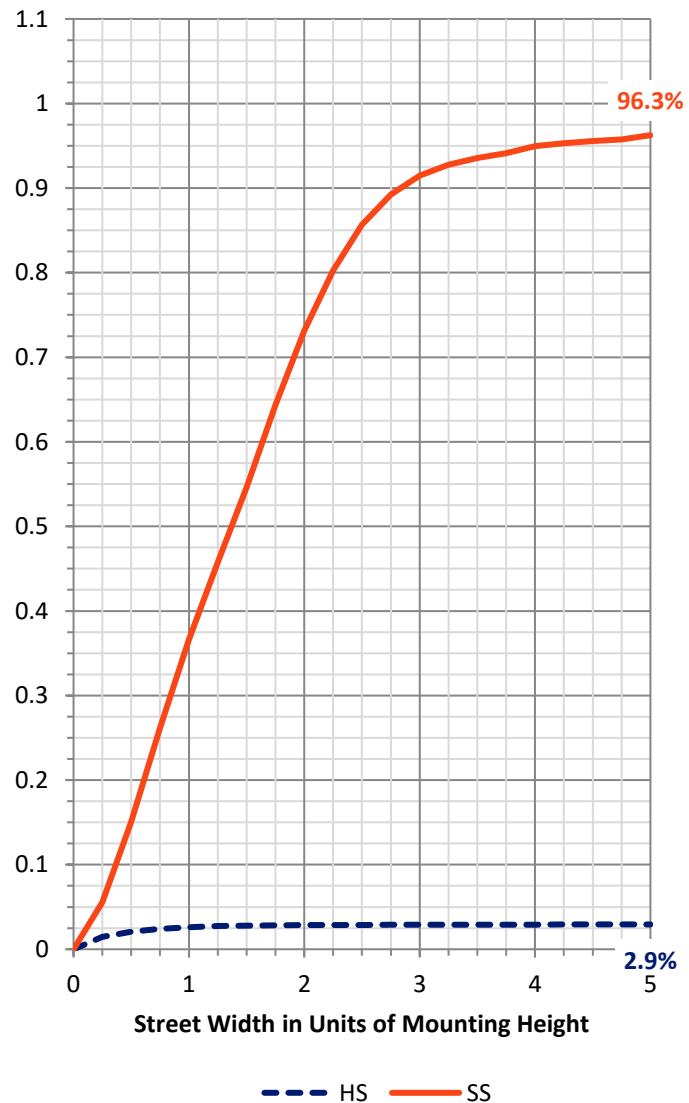

REPORT NUMBER: P152033


CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	211.0	7.4			
FM	(30°-60°)	1040.9	36.7			
FH	(60°-80°)	1461.4	51.5			G1/1800
FVH	(80°-90°)	37.7	1.3			G1/100
BL	(0°-30°)	32.1	1.1	B0/110		
BM	(30°-60°)	38.5	1.4	B0/220		
BH	(60°-80°)	12.3	0.4	B0/110		G0/110
BVH	(80°-90°)	1.4	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type IV Short

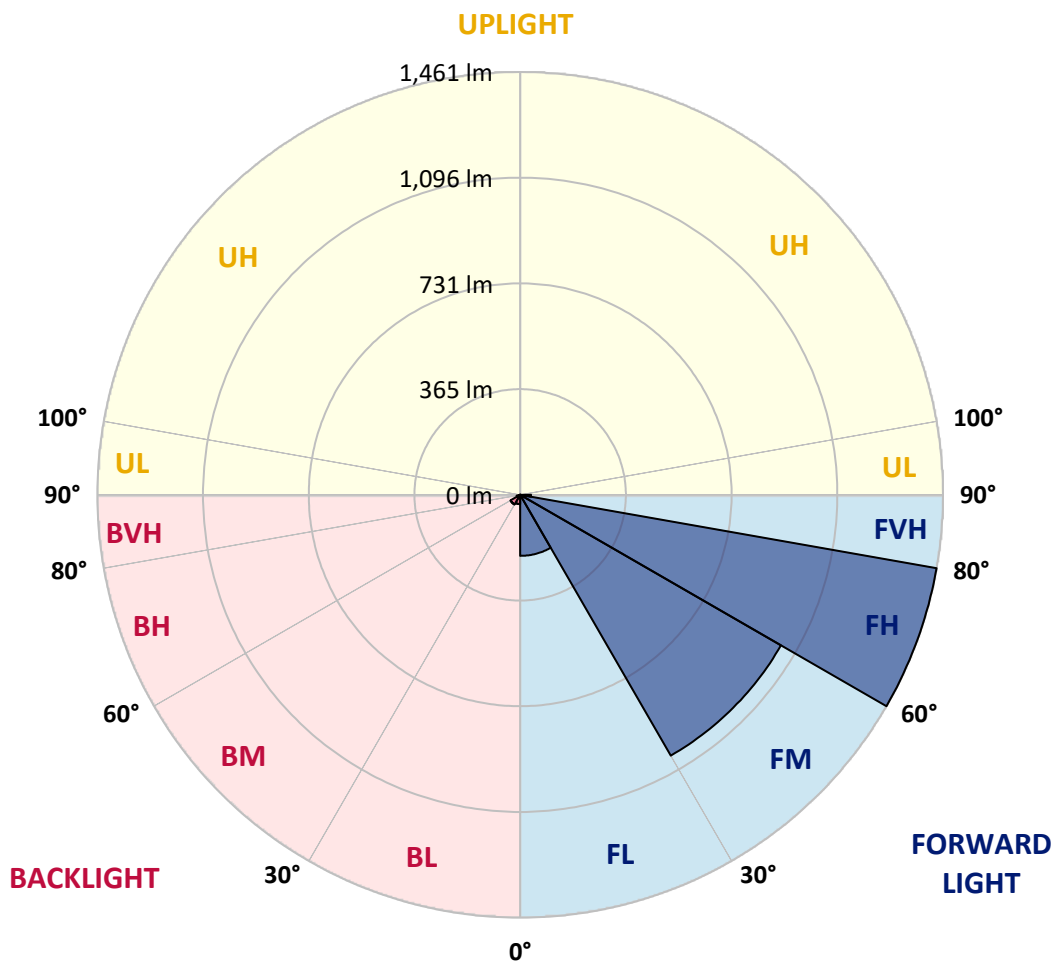



REPORT NUMBER: P152033

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1
2.5°	285.7	282.4	278.7	278.7	274.1	274.1	271.3	263.8	262.9	258.8	254.5
5°	364.7	361.9	357.2	353.1	349.3	342.8	338.1	329.3	319.6	310.3	302.0
7.5°	441.8	440.3	432.0	430.6	424.6	413.9	404.6	391.6	374.8	361.9	346.5
10°	513.3	510.1	508.2	500.2	491.4	479.8	465.4	449.6	430.2	409.6	387.9
12.5°	569.9	568.1	559.7	556.5	547.2	535.5	517.4	497.0	477.5	451.0	425.5
15°	612.2	608.9	603.4	598.2	587.2	576.9	560.2	537.9	514.2	485.4	454.7
17.5°	647.5	641.5	640.1	632.1	620.5	608.5	589.9	569.4	541.6	512.7	479.4
20°	694.9	686.5	683.7	672.1	658.7	642.0	620.5	595.0	565.7	534.2	499.8
22.5°	750.6	744.6	738.5	728.3	711.1	687.5	656.4	628.5	591.3	556.5	519.3
25°	829.5	824.5	814.7	800.8	779.4	751.1	713.5	672.5	628.9	584.4	540.6
27.5°	906.2	901.6	894.6	883.9	859.8	828.6	782.2	730.2	674.9	621.0	572.7
30°	978.2	974.0	967.0	956.4	935.0	904.4	851.9	796.2	727.4	664.7	606.6
32.5°	1055.8	1054.4	1046.5	1031.2	1012.5	971.3	914.1	854.2	784.6	712.0	644.2
35°	1143.6	1132.8	1125.5	1110.2	1078.5	1034.4	967.6	902.1	828.6	754.3	678.7
37.5°	1217.9	1207.7	1198.3	1178.9	1140.3	1084.1	1008.4	936.4	860.7	785.0	707.9
40°	1272.2	1267.2	1256.0	1230.5	1187.3	1120.3	1038.5	960.1	883.9	807.8	731.6
42.5°	1312.6	1304.8	1292.2	1265.7	1214.6	1138.4	1050.7	969.8	894.6	821.7	746.9
45°	1327.6	1321.0	1309.4	1280.6	1225.3	1143.6	1050.3	967.0	895.0	825.9	757.1
47.5°	1318.7	1312.2	1302.0	1275.0	1220.7	1137.5	1041.9	959.2	890.5	827.3	766.4
50°	1289.4	1285.7	1277.8	1255.0	1206.3	1125.9	1034.4	955.0	889.5	834.2	779.4
52.5°	1286.6	1284.4	1274.6	1251.8	1202.1	1122.2	1033.5	957.3	897.4	843.0	788.7
55°	1572.3	1539.3	1465.5	1402.8	1299.7	1177.0	1080.4	994.9	930.9	877.9	839.8
57.5°	2234.6	2185.4	2088.4	1969.0	1732.1	1499.4	1313.2	1178.4	1112.0	1087.9	1102.3
60°	2545.0	2536.2	2520.8	2464.1	2342.9	2142.7	1919.7	1678.7	1582.1	1573.7	1603.0
62.5°	2692.2	2686.6	2691.3	2684.2	2646.6	2588.2	2524.0	2420.0	2324.4	2262.5	2131.5
65°	2760.0	2763.7	2790.2	2811.1	2815.8	2831.1	2878.0	3007.6	3102.3	2943.0	2579.3
67.5°	2587.7	2609.5	2670.4	2746.5	2835.8	2922.1	3061.5	3334.6	3529.2	3342.0	2825.5
69°	2142.3	2153.0	2301.6	2445.1	2662.9	2815.2	3017.3	3375.4	3594.2	3382.9	2806.0
70°	1686.5	1696.3	1855.6	2050.7	2419.1	2615.1	2879.4	3306.2	3533.4	3328.5	2705.7
72.5°	760.8	746.9	803.1	907.6	1308.0	1619.2	2081.3	2678.8	2915.1	2666.6	2024.2
75°	531.4	525.4	531.4	531.8	594.1	766.4	967.0	1452.0	1795.8	1549.5	967.0
77.5°	411.5	407.4	403.2	398.5	406.0	454.7	474.2	515.1	668.9	632.6	368.8
80°	325.6	321.9	332.1	328.8	328.8	334.4	330.7	315.4	286.6	265.7	237.8
82.5°	151.4	152.3	152.3	165.4	199.3	232.7	243.4	228.1	202.5	172.3	138.9
85°	14.4	16.3	27.4	42.3	84.0	94.7	95.2	79.0	79.0	62.3	50.2
87.5°	0.0	0.4	0.4	0.4	4.1	11.6	9.7	2.8	1.3	1.3	2.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152033
 CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1
2.5°	247.2	245.7	240.1	234.6	229.4	223.8	218.8	213.7	208.1	203.9	198.8
5°	288.9	278.7	267.0	256.0	244.8	233.2	221.1	210.4	199.3	189.0	179.3
7.5°	331.2	311.2	295.4	275.4	257.3	239.2	222.5	205.3	189.5	174.6	160.7
10°	366.9	342.8	318.1	292.6	266.6	242.5	219.3	198.8	177.9	159.8	142.6
12.5°	396.2	365.6	335.3	303.3	274.1	243.4	214.6	189.9	165.4	144.9	127.3
15°	422.7	387.4	351.2	314.0	276.8	242.0	209.9	179.3	154.2	131.0	111.0
17.5°	444.0	403.6	362.8	320.9	281.0	240.1	203.9	171.8	142.6	118.4	99.0
20°	462.6	420.4	376.3	329.3	283.8	239.7	198.8	162.6	132.3	106.8	87.8
22.5°	479.8	437.5	390.2	340.0	288.0	239.2	194.2	155.6	123.5	98.0	79.0
25°	499.4	454.7	405.1	351.2	295.4	241.0	191.4	150.1	115.6	89.6	72.0
27.5°	521.1	474.2	422.7	365.1	305.2	244.8	190.5	144.0	108.7	81.8	66.4
30°	551.8	497.5	440.3	379.1	314.0	249.0	189.5	140.3	101.8	75.8	60.8
32.5°	578.8	520.2	459.9	393.5	323.7	253.2	189.0	135.1	95.2	69.6	56.7
35°	607.0	541.1	476.6	407.4	332.1	257.8	188.6	131.4	89.2	63.6	52.5
37.5°	631.7	558.8	489.5	419.5	341.5	262.0	189.0	128.2	83.6	58.5	48.8
40°	652.6	576.9	503.9	430.6	351.2	268.5	189.5	125.0	78.0	53.9	45.5
42.5°	671.2	594.1	519.3	443.1	362.3	276.0	192.3	122.2	73.4	49.7	42.3
45°	685.6	609.8	536.1	460.7	380.4	288.0	197.4	120.3	68.7	46.0	39.5
47.5°	700.4	633.1	564.4	488.6	406.9	307.0	206.2	119.8	65.1	43.2	37.2
50°	720.9	656.4	589.4	517.0	431.1	326.5	216.9	120.3	60.4	40.4	34.8
52.5°	735.8	680.0	622.0	566.2	488.6	386.0	258.2	128.7	58.0	38.1	32.0
55°	823.5	813.8	815.1	824.5	764.6	656.8	432.0	185.8	68.3	43.2	31.6
57.5°	1161.2	1195.6	1215.5	1215.1	1116.2	925.7	580.1	238.8	76.2	50.2	37.6
60°	1605.3	1579.3	1542.6	1452.0	1320.5	1056.7	648.9	256.9	65.9	39.9	34.4
62.5°	1997.8	1845.4	1710.3	1563.5	1391.2	1102.3	662.8	255.4	57.6	30.2	24.1
65°	2242.6	1968.5	1750.2	1566.2	1363.3	1064.1	627.0	234.6	48.8	24.7	20.0
67.5°	2301.0	1902.1	1593.2	1358.7	1139.0	828.2	460.3	176.5	38.1	20.4	17.6
69°	2173.4	1690.8	1320.1	1053.9	828.6	549.5	284.8	111.5	29.2	18.5	16.3
70°	1999.2	1470.6	1075.3	845.8	613.6	386.0	199.3	78.5	23.7	17.2	14.8
72.5°	1286.2	772.4	528.6	367.9	253.2	153.8	78.0	35.3	18.1	14.4	12.1
75°	498.9	285.7	207.2	157.5	123.1	85.5	47.4	22.8	15.3	12.1	9.3
77.5°	245.7	188.1	153.8	105.4	61.3	38.1	25.6	17.6	12.5	8.8	6.0
80°	194.2	129.1	77.1	47.9	36.3	27.4	19.5	14.4	9.3	5.6	4.1
82.5°	99.4	54.3	39.9	32.5	26.9	21.3	15.8	10.3	6.0	3.7	3.2
85°	31.1	22.8	20.4	20.0	18.5	15.3	11.2	6.5	3.7	2.3	2.3
87.5°	2.3	3.2	4.1	3.2	3.7	3.2	4.1	2.8	1.9	1.9	1.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152033

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1
2.5°	195.1	189.5	184.4	181.1	175.1	172.7	170.5	169.5	165.4	166.3	162.6
5°	170.5	160.7	153.3	145.8	138.9	133.8	129.6	124.5	120.3	118.4	114.7
7.5°	148.2	135.6	125.9	118.0	109.6	103.1	97.5	93.8	90.2	86.4	84.6
10°	128.7	115.2	104.0	96.2	88.3	82.7	78.5	75.8	73.4	72.0	71.5
12.5°	110.6	97.5	87.4	80.3	74.3	71.5	69.6	68.3	67.8	67.4	67.4
15°	96.6	83.6	75.8	70.6	67.8	66.4	65.9	65.1	64.1	63.6	63.6
17.5°	83.6	73.9	68.3	65.5	64.1	63.2	62.3	61.3	60.4	59.9	59.9
20°	74.8	66.8	64.1	62.3	60.8	59.9	58.5	57.6	57.1	56.7	56.2
22.5°	67.8	62.7	60.8	59.5	57.6	56.2	55.2	54.3	53.4	53.0	52.5
25°	62.7	59.5	58.0	56.2	54.3	53.0	51.6	50.2	49.2	48.8	47.9
27.5°	59.0	56.7	54.8	52.5	50.7	49.2	47.9	46.4	45.5	44.6	44.1
30°	55.8	53.4	51.1	49.2	46.9	45.5	43.6	42.3	41.8	40.8	39.9
32.5°	52.5	50.2	47.9	45.5	43.2	41.3	40.4	38.5	37.6	37.2	36.3
35°	48.8	46.4	43.6	41.8	39.5	37.6	36.3	34.8	33.9	33.0	32.5
37.5°	45.5	42.7	39.9	37.6	35.8	33.9	32.5	31.1	30.2	29.2	28.8
40°	41.8	39.1	36.3	33.9	32.0	30.7	29.2	27.9	26.9	26.4	26.4
42.5°	38.5	35.3	32.5	30.7	29.2	27.4	26.0	24.7	24.1	23.7	24.1
45°	35.3	32.0	29.7	27.9	26.4	24.7	23.2	22.3	21.9	22.3	22.8
47.5°	32.5	29.2	26.9	25.6	24.1	22.8	21.3	20.4	20.4	21.3	22.3
50°	29.7	26.4	24.7	23.7	22.3	20.9	19.1	18.5	19.1	20.0	20.9
52.5°	26.9	23.2	21.9	21.3	20.0	18.5	17.2	16.7	17.2	18.1	17.6
55°	24.1	20.4	20.0	19.5	18.1	16.3	14.8	14.8	14.8	14.4	13.5
57.5°	23.2	18.1	17.6	17.2	15.8	13.9	13.1	12.1	11.6	10.3	9.7
60°	24.1	16.3	16.3	15.3	13.9	12.1	10.7	9.3	8.4	7.5	7.5
62.5°	19.5	14.8	14.4	13.5	11.6	9.7	8.4	6.9	6.5	6.0	6.0
65°	15.8	13.5	12.5	11.2	9.7	7.9	6.5	5.6	5.1	5.1	5.6
67.5°	14.4	12.1	10.7	9.3	7.9	6.0	5.1	4.7	4.7	5.1	5.1
69°	13.5	11.2	9.7	8.4	6.9	5.6	4.7	4.7	4.7	4.7	5.1
70°	12.5	10.7	9.3	7.9	6.0	4.7	4.1	4.1	4.7	4.7	5.1
72.5°	9.7	8.4	7.9	6.5	4.7	4.1	3.7	4.1	4.1	4.7	4.7
75°	7.5	6.0	6.0	5.1	3.7	3.2	3.2	3.7	3.7	4.1	4.1
77.5°	5.1	4.1	4.1	3.7	3.2	2.8	2.8	3.2	3.7	3.7	4.1
80°	3.7	3.2	2.8	3.2	2.8	2.3	2.8	3.2	3.2	3.7	3.7
82.5°	2.8	2.8	2.8	2.8	2.3	2.3	2.8	2.8	3.2	3.7	3.7
85°	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.8	2.8	3.2	3.2
87.5°	1.3	1.3	1.3	1.9	1.9	2.3	2.3	2.3	2.3	2.8	2.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152033

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-HSS-8030

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	214.1	214.1	214.1	214.1
2.5°	161.7	161.1	159.3	159.8
5°	113.4	110.6	112.4	111.9
7.5°	83.1	82.7	82.2	83.1
10°	71.1	71.1	70.6	71.1
12.5°	66.8	66.8	66.8	66.8
15°	63.6	63.6	63.2	63.2
17.5°	59.9	59.9	59.9	59.5
20°	56.2	55.8	55.8	55.8
22.5°	52.0	51.6	51.6	51.6
25°	47.9	47.4	47.4	47.4
27.5°	43.6	43.2	42.7	42.7
30°	39.5	39.1	38.5	38.5
32.5°	35.3	34.8	34.4	34.4
35°	31.6	31.6	31.1	30.7
37.5°	28.3	28.3	28.3	28.3
40°	26.0	26.4	26.4	26.4
42.5°	24.7	25.1	25.6	26.0
45°	23.7	24.7	25.1	25.1
47.5°	23.2	23.7	24.1	24.1
50°	21.3	20.9	20.9	20.9
52.5°	17.2	16.3	15.8	15.3
55°	12.5	12.1	11.2	11.2
57.5°	8.8	8.8	8.4	8.4
60°	6.9	6.9	6.5	6.9
62.5°	6.0	6.0	6.0	6.0
65°	5.6	5.6	5.6	5.6
67.5°	5.6	5.6	5.6	5.6
69°	5.1	5.1	5.1	5.1
70°	5.1	5.1	5.1	5.1
72.5°	4.7	4.7	4.7	4.7
75°	4.1	4.7	4.7	4.7
77.5°	4.1	4.1	4.1	4.1
80°	3.7	3.7	4.1	4.1
82.5°	3.7	3.7	3.7	3.7
85°	3.2	3.2	3.7	3.7
87.5°	2.8	2.8	3.2	3.2
90°	0.0	0.0	0.0	0.0

(END OF REPORT)