

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P654086

Luminaire Tested: **GLAN-SA9A-840-U-RW-GRSBK**

Issue Date: 5/27/2021

Test Information

Test Method: LM-79-08
Report Number: P654086
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-057-7)
Test Lab: INNOVATION CENTER
Issue Date: 5/27/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA9A-840-U-RW-GRSBK
Description: GALLEON AREA AND ROADWAY LUMINAIRE
(9) 80 CRI, 4000K, 615mA LIGHTSQUARES WITH 16 LEDS EACH AND RECTANGULAR
WIDE OPTICS WITH BLACK GLARE REDUCTION SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 22532.1 lumens
Efficiency: N/A
Efficacy: 82.2 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G1


Input Watts (W): 274
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P654086
 CATALOG NUMBER: GLAN-SA9A-840-U-RW-GRSBK

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

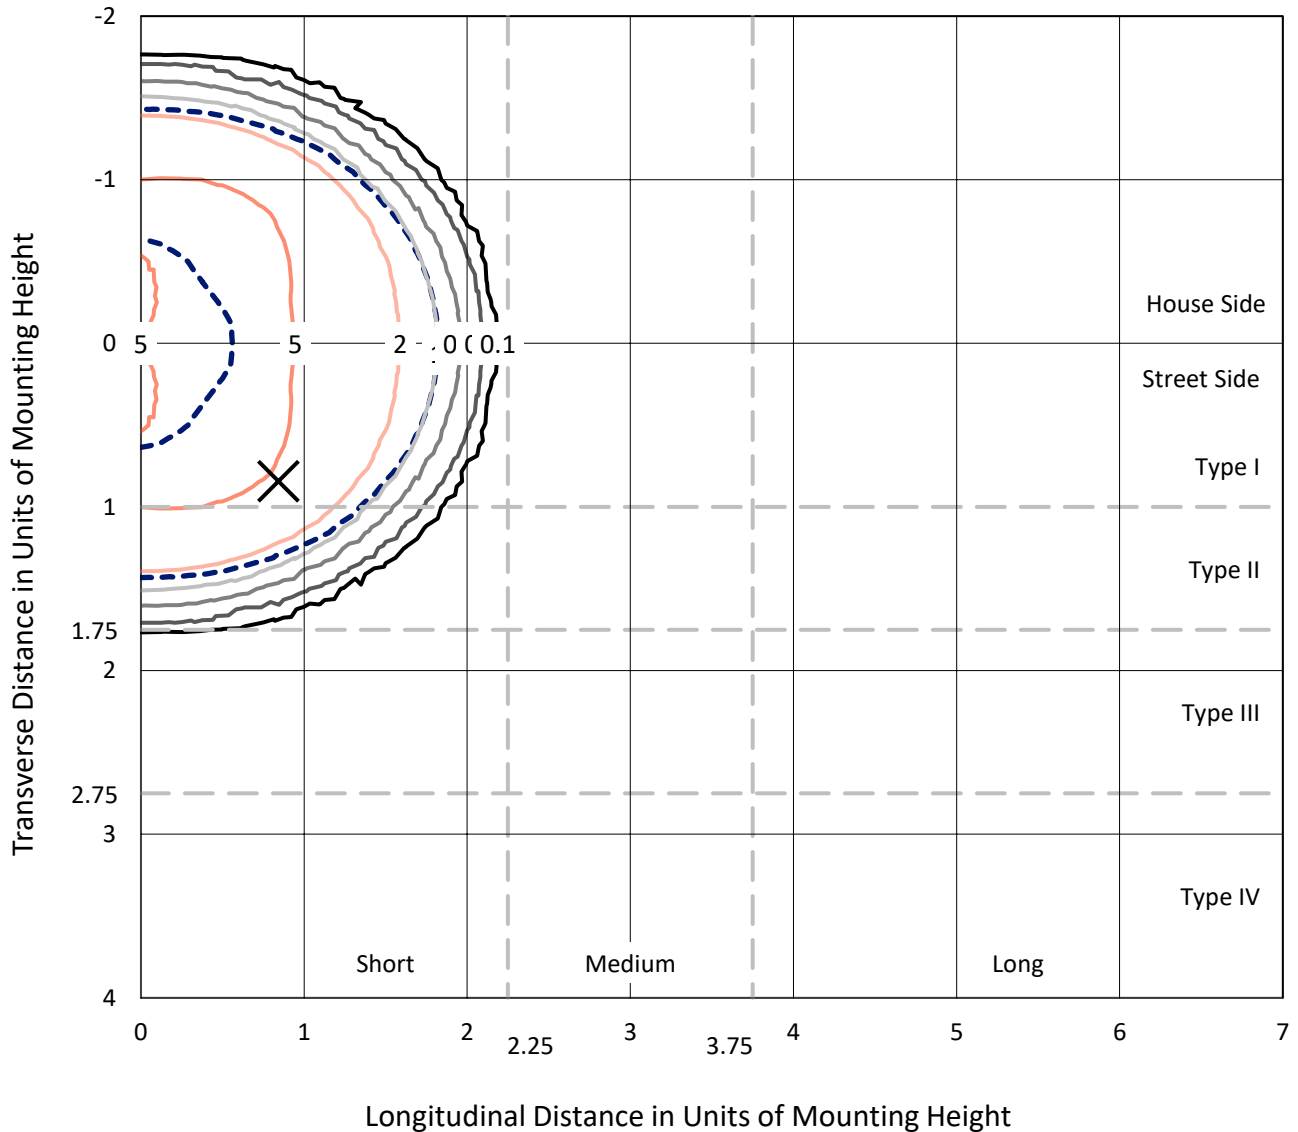

Based on 25 foot mounting height. Maximum calculated value = 6 fc
 Type V - Short - N/A

REPORT NUMBER: P654086
CATALOG NUMBER: GLAN-SA9A-840-U-RW-GRSBK

Luminous Intensity Polar Plot

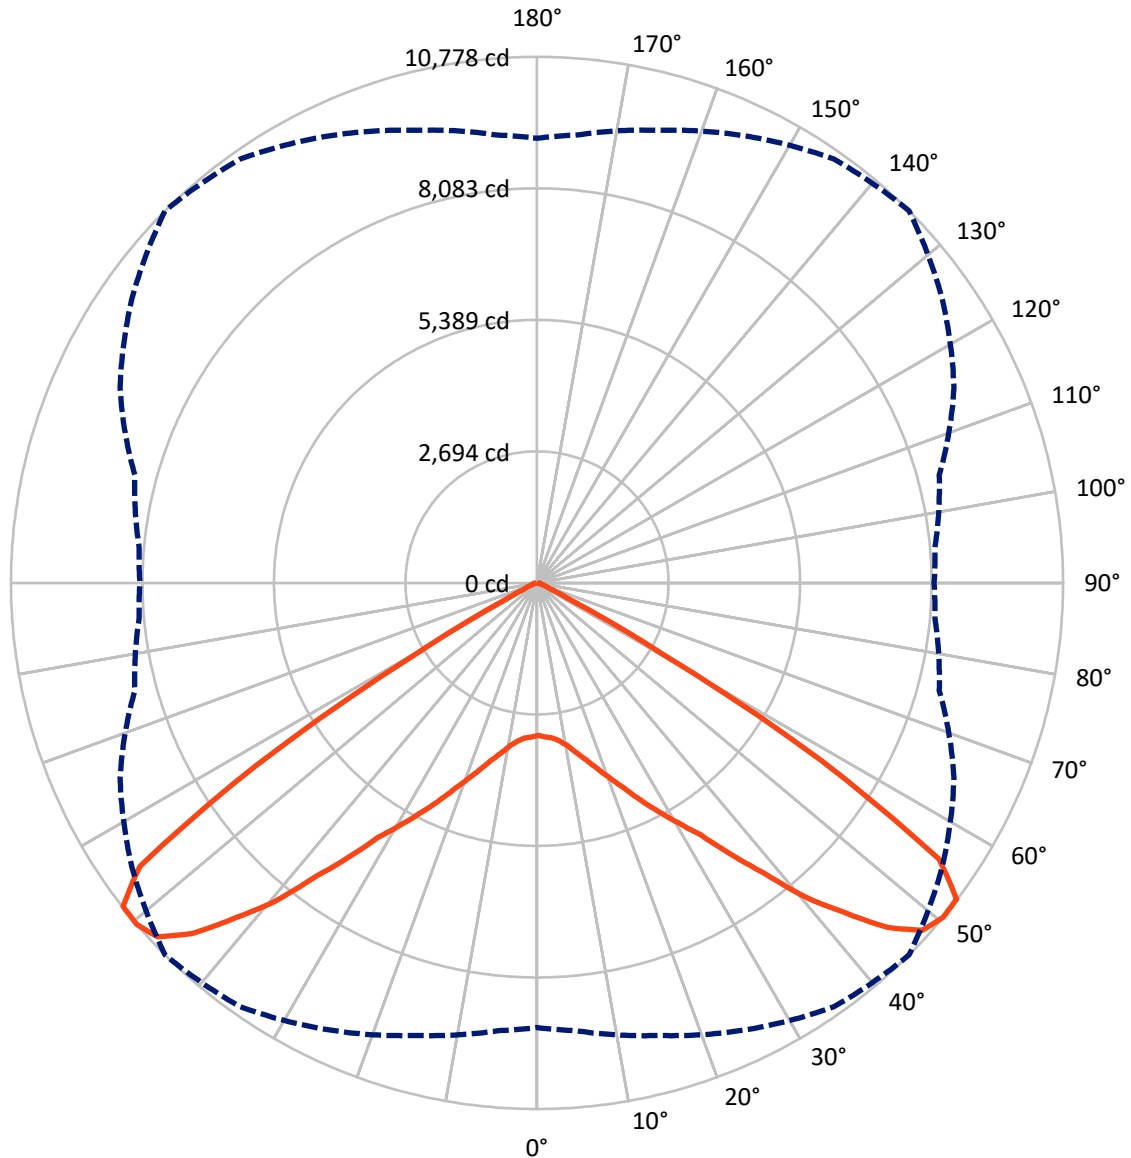

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 50-Deg Vertical

REPORT NUMBER: P654086
 CATALOG NUMBER: GLAN-SA9A-840-U-RW-GRSBK


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	11266.0	0.0	11266.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	11266.0	0.0	11266.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	22532.1	0.0	22532.1
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	310.8	1.4
10°-20°	1071.1	4.8
20°-30°	2187.6	9.7
30°-40°	4171.8	18.5
40°-50°	7030.1	31.2
50°-60°	6704.4	29.8
60°-70°	935.9	4.2
70°-80°	89.5	0.4
80°-90°	30.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	22532.1	100.0
0°-180°	22532.1	100.0

Coefficient of Utilization

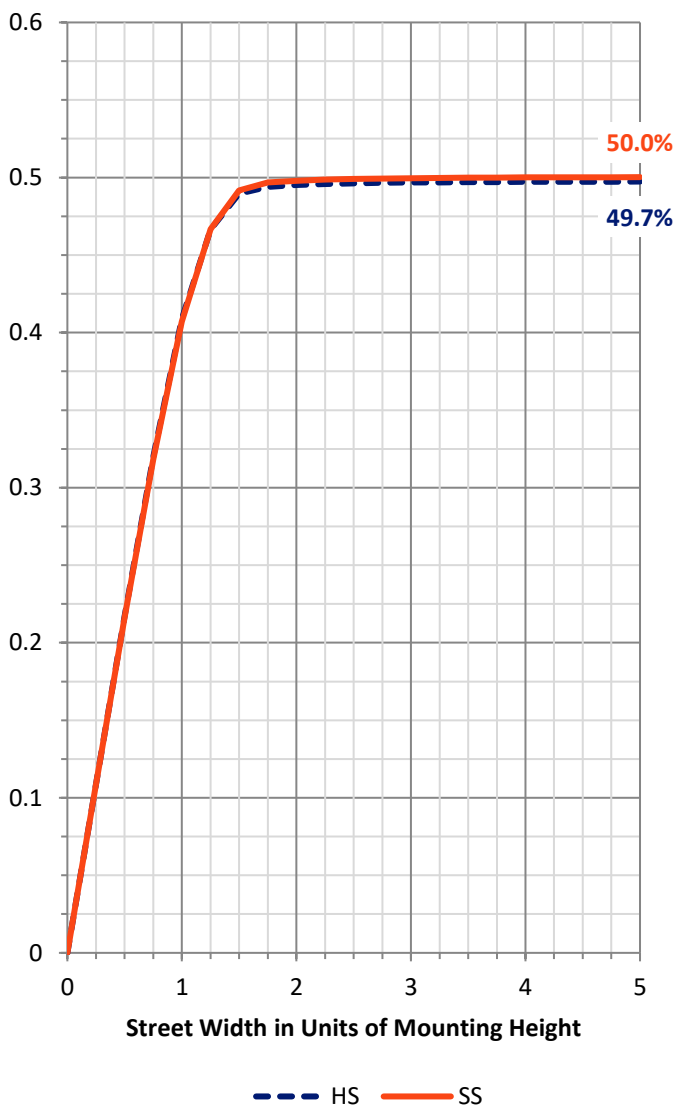


REPORT NUMBER: P654086
 CATALOG NUMBER: GLAN-SA9A-840-U-RW-GRSBK

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1784.7	7.9			
FM (30°-60°)	8953.1	39.7			
FH (60°-80°)	512.7	2.3			G0/660
FVH (80°-90°)	15.5	0.1			G1/100
BL (0°-30°)	1784.7	7.9	B3/2500		
BM (30°-60°)	8953.1	39.7	B5		
BH (60°-80°)	512.7	2.3	B2/1000		G0/660
BVH (80°-90°)	15.5	0.1			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G1

Type V Short

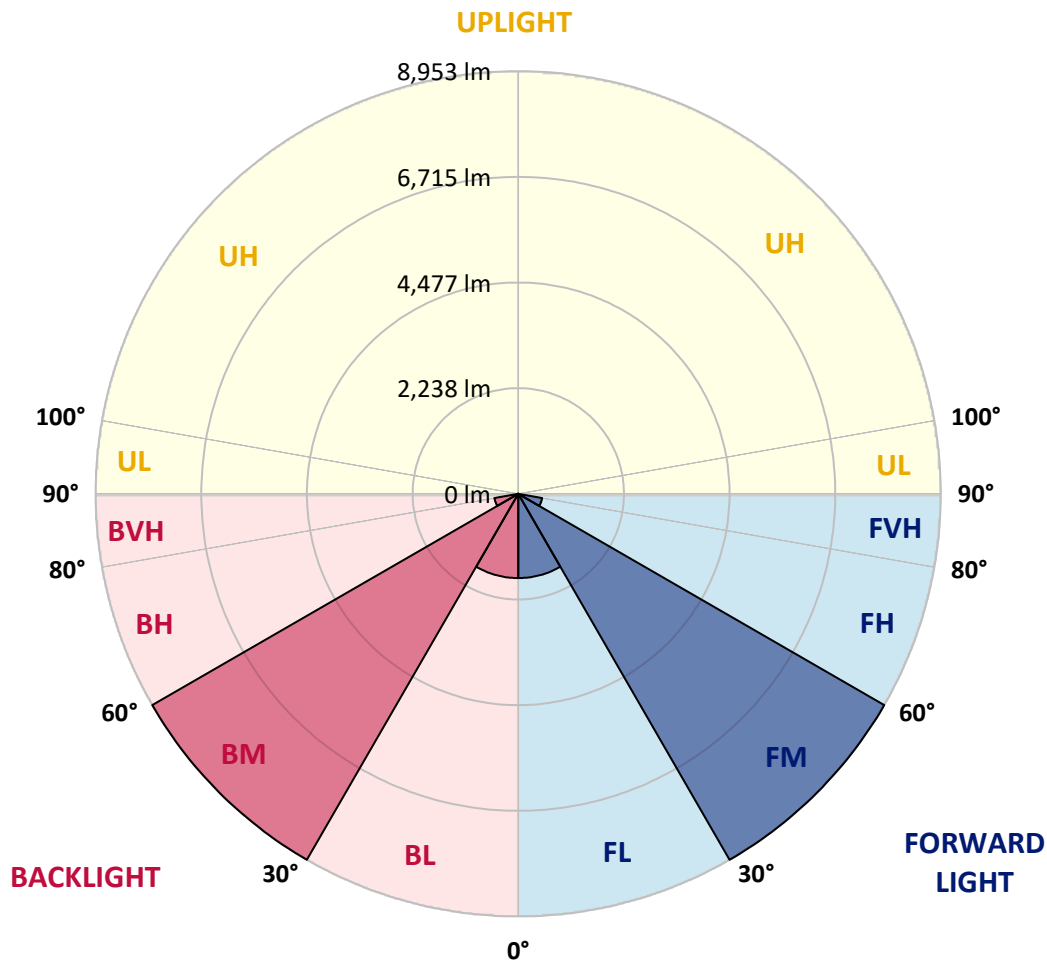



REPORT NUMBER: P654086

CATALOG NUMBER: GLAN-SA9A-840-U-RW-GRSBK

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	3123.8	3123.8	3123.8	3123.8	3123.8	3123.8	3123.8	3123.8	3123.8	3123.8	3123.8
2.5°	3112.5	3112.5	3108.7	3138.9	3123.8	3158.0	3154.2	3165.5	3176.9	3173.1	3203.5
5°	3085.9	3082.1	3082.1	3116.2	3150.4	3188.2	3222.4	3245.2	3283.0	3283.0	3320.9
7.5°	3112.5	3093.5	3120.0	3135.2	3199.7	3264.1	3320.9	3366.4	3453.7	3484.0	3472.6
10°	3120.0	3142.8	3161.7	3207.2	3286.9	3385.4	3434.7	3548.4	3647.0	3715.2	3730.4
12.5°	3169.3	3203.5	3256.5	3366.4	3438.5	3567.4	3635.6	3745.6	3882.1	3957.8	4010.9
15°	3264.1	3275.4	3343.7	3484.0	3639.4	3756.9	3863.0	3942.7	4075.4	4162.5	4166.4
17.5°	3385.4	3434.7	3529.4	3662.1	3825.2	3999.5	4083.0	4170.2	4219.5	4337.0	4363.5
20°	3628.1	3635.6	3726.6	3901.0	4105.7	4265.0	4325.6	4371.1	4352.1	4473.4	4496.2
22.5°	3855.5	3863.0	3976.8	4211.9	4431.7	4568.2	4594.7	4568.2	4511.4	4598.5	4606.2
25°	4086.8	4155.0	4238.4	4473.4	4746.4	4928.3	4932.1	4860.1	4742.6	4757.8	4795.6
27.5°	4446.9	4496.2	4583.4	4799.5	5099.0	5303.7	5269.5	5182.3	5030.7	5042.1	5030.7
30°	4867.7	4913.2	4985.2	5262.0	5481.9	5705.5	5754.8	5671.4	5444.0	5394.7	5451.5
32.5°	5375.7	5440.2	5572.8	5826.9	6012.6	6149.1	6183.2	6152.8	5940.6	5921.6	5959.5
35°	5993.6	6080.9	6202.1	6425.8	6577.5	6823.9	6823.9	6721.5	6528.2	6551.0	6547.1
37.5°	6645.7	6774.6	6964.2	7191.6	7396.3	7529.1	7487.3	7400.1	7206.8	7157.5	7206.8
40°	7464.5	7529.1	7767.9	8063.6	8313.8	8465.4	8287.2	8097.7	7635.2	7707.2	7839.9
42.5°	8211.4	8313.8	8495.7	8821.8	9106.1	9231.2	9018.9	8643.6	8086.3	8029.4	8128.0
45°	8848.3	8958.2	9197.1	9663.3	9962.9	10072.8	9602.7	8996.2	8359.3	8215.2	8256.9
47.5°	9272.9	9329.8	9663.3	10107.0	10379.9	10630.1	9955.3	9238.8	8488.1	8215.2	8200.0
50°	9109.9	9208.4	9598.9	10103.2	10599.8	10777.9	10133.5	9424.6	8529.8	8181.1	8135.6
52.5°	8090.1	8260.7	8696.7	9375.3	10125.9	10762.8	10379.9	9363.9	8514.7	8215.2	8283.4
55°	5629.7	5633.5	6164.3	7165.1	8491.9	9993.2	10019.8	9432.2	8613.3	8427.5	8431.3
57.5°	2263.2	2377.0	2782.6	3787.3	5011.8	6861.8	8158.4	8749.8	8624.6	8579.1	8696.7
60°	572.5	576.3	701.3	1069.1	1762.8	2941.8	4272.5	5781.4	6657.1	6956.6	6998.3
62.5°	291.9	295.7	326.1	379.1	481.5	788.5	1402.7	2225.4	3165.5	3643.2	3768.3
65°	238.8	238.8	257.8	284.3	288.1	303.3	363.9	519.4	754.4	856.8	868.2
67.5°	182.0	182.0	197.1	212.3	219.9	216.1	208.5	216.1	261.6	250.2	242.6
70°	113.7	117.5	125.1	140.3	147.8	151.6	155.4	163.0	185.8	193.3	185.8
72.5°	68.2	68.2	72.0	83.4	94.8	102.3	113.7	121.3	132.7	151.6	147.8
75°	30.4	30.4	37.9	49.3	60.6	72.0	83.4	94.8	102.3	113.7	117.5
77.5°	7.6	11.4	18.9	34.1	45.5	60.6	75.9	87.2	94.8	94.8	91.0
80°	3.8	3.8	15.1	26.6	49.3	64.4	83.4	91.0	102.3	94.8	83.4
82.5°	3.8	3.8	15.1	26.6	45.5	64.4	87.2	98.6	106.1	94.8	79.6
85°	0.0	3.8	11.4	22.7	37.9	45.5	37.9	26.6	15.1	15.1	11.4
87.5°	0.0	0.0	3.8	3.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)