

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P954834

Luminaire Tested: **GLAN-SB8A-722-U-SL3**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P954834
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB8A-722-U-SL3
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(8) 70 CRI, 2200K, 350mA LIGHTSQUARES WITH 26 LEDS EACH AND TYPE III
SPILL LIGHT ELIMINATOR OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 29285 lumens
Efficiency: N/A
Efficacy: 129.0 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type IV - Medium
BUG Rating: B3 - U0 - G5

Input Watts (W): 227.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P954834

CATALOG NUMBER: GLAN-SB8A-722-U-SL3

Iso-Footcandle Lines of Horizontal Illumination


× Max cd

--- 1/2 Max cd

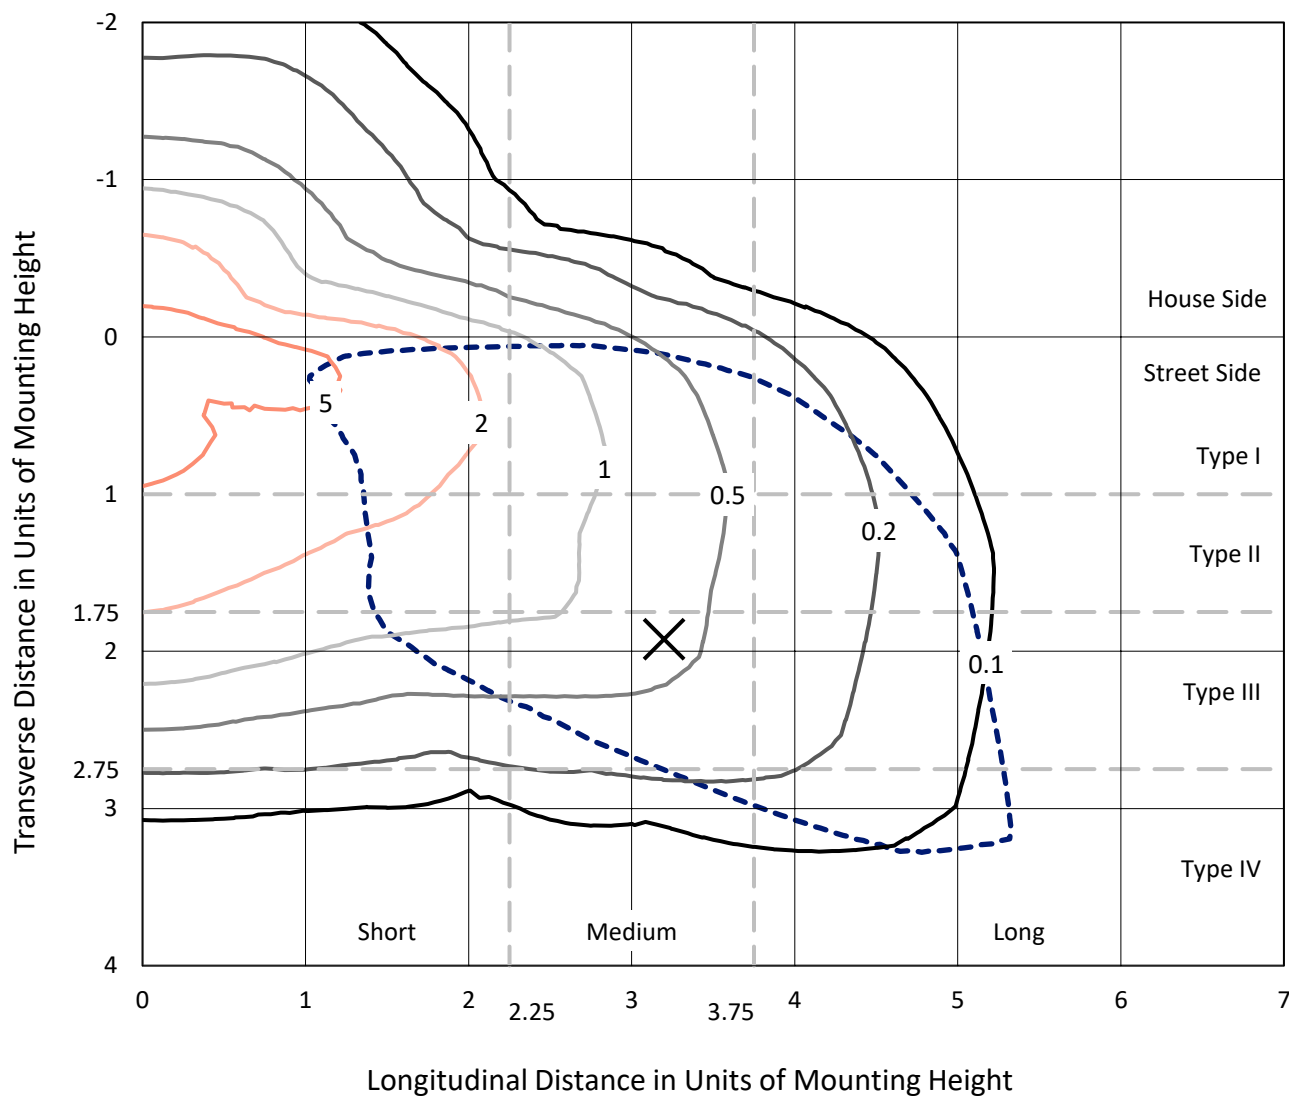

Based on 25 foot mounting height. Maximum calculated value = 8.6 fc
Type IV - Medium - N/A

REPORT NUMBER: P954834
CATALOG NUMBER: GLAN-SB8A-722-U-SL3

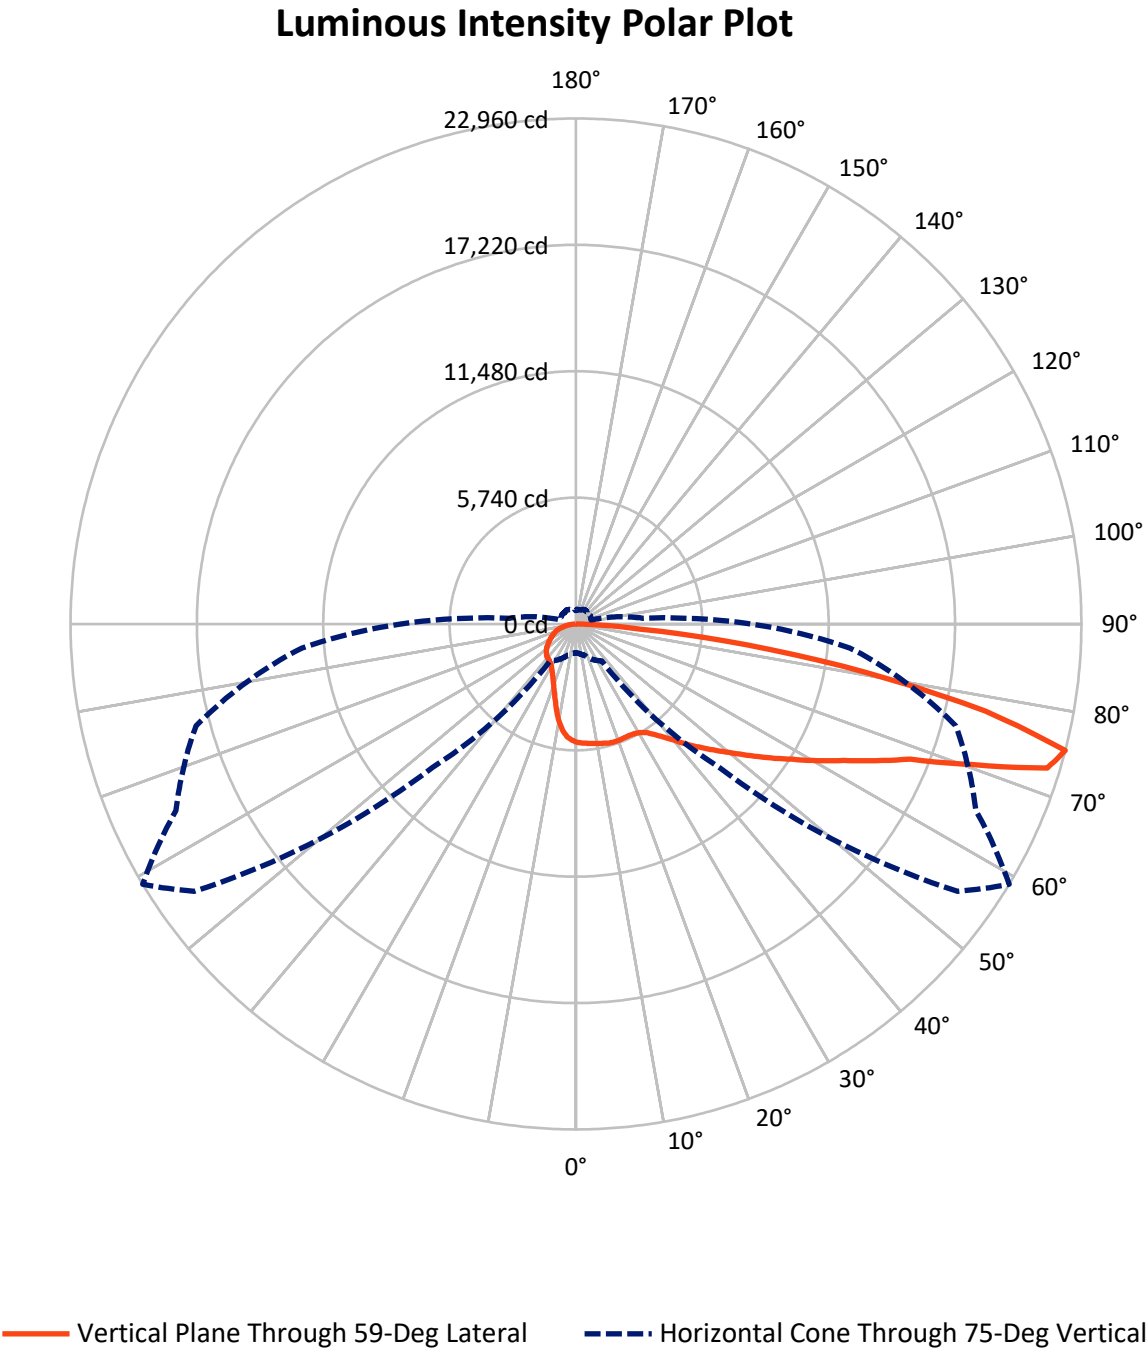

REPORT NUMBER: P954834

CATALOG NUMBER: GLAN-SB8A-722-U-SL3


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	5492.6	0.0	5492.6
	% Fixture	18.8	0.0	18.8
Street Side	Lumens	23792.4	0.0	23792.4
	% Fixture	81.2	0.0	81.2
Total	Lumens	29285.0	0.0	29285.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	482.0	1.6
10°-20°	1232.0	4.2
20°-30°	1871.2	6.4
30°-40°	2781.5	9.5
40°-50°	4136.7	14.1
50°-60°	5615.0	19.2
60°-70°	6855.0	23.4
70°-80°	5379.7	18.4
80°-90°	931.9	3.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	29285.0	100.0
0°-180°	29285.0	100.0

Coefficient of Utilization

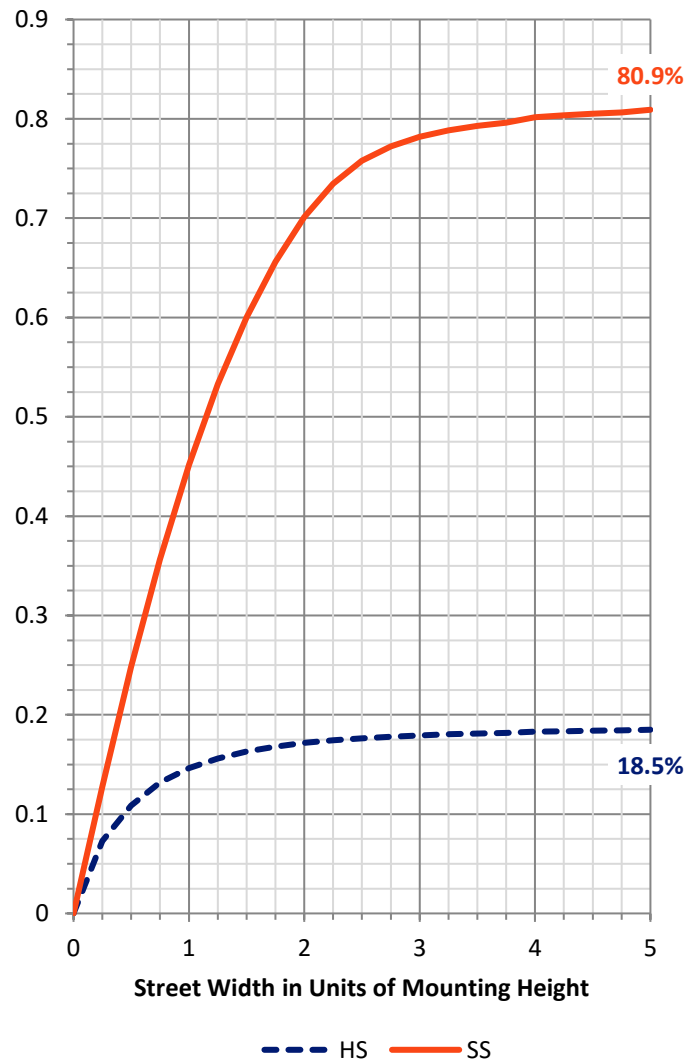

REPORT NUMBER: P954834


CATALOG NUMBER: GLAN-SB8A-722-U-SL3

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	2183.5	7.5			
FM	(30°-60°)	10040.1	34.3			
FH	(60°-80°)	10779.5	36.8			G4/12000
FVH	(80°-90°)	789.2	2.7			G5
BL	(0°-30°)	1401.7	4.8	B3/2500		
BM	(30°-60°)	2493.1	8.5	B2/2500		
BH	(60°-80°)	1455.2	5.0	B3/2500		G3/2500
BVH	(80°-90°)	142.7	0.5			G2/225
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5

Type IV Medium

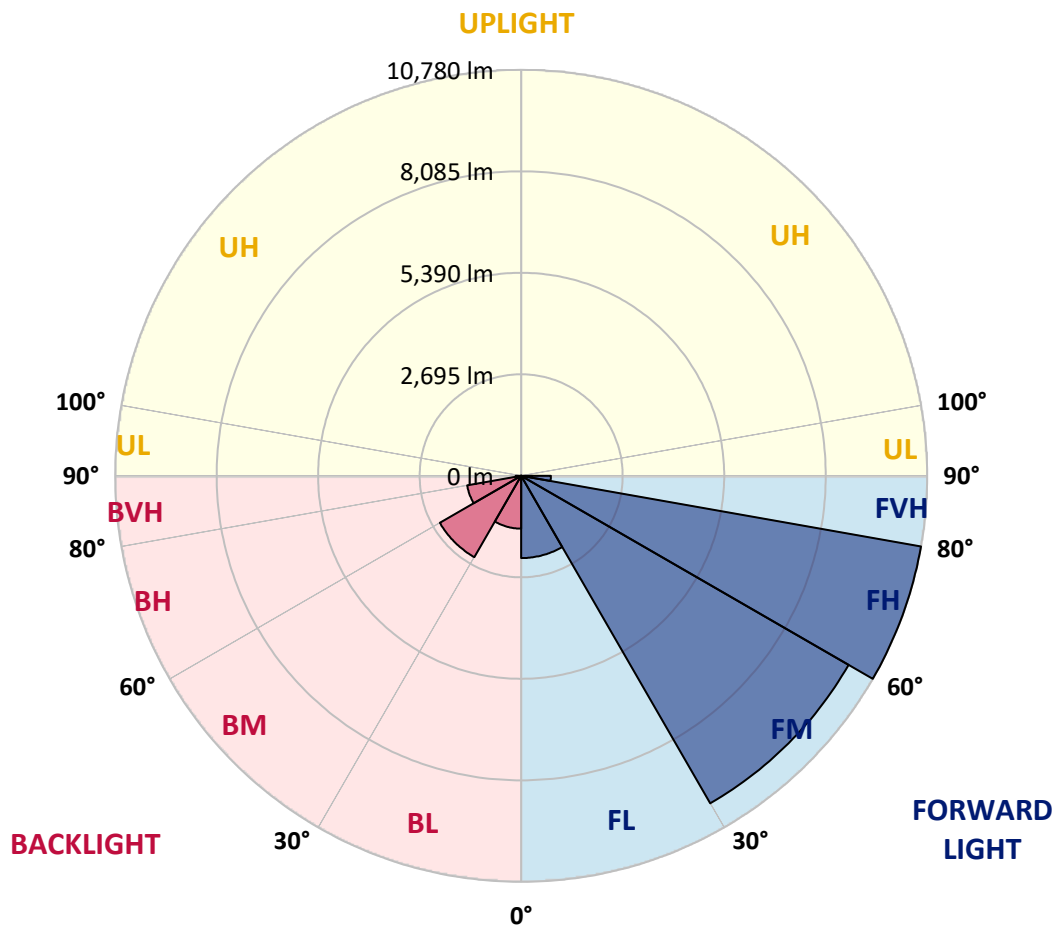

REPORT NUMBER: P954834

CATALOG NUMBER: GLAN-SB8A-722-U-SL3

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	59°	65°	75°
0°	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2
2.5°	5420.9	5402.0	5420.9	5413.0	5409.9	5403.6	5405.1	5416.2	5409.9	5417.7
5°	5384.6	5373.6	5392.5	5387.8	5408.3	5411.4	5431.9	5444.5	5452.4	5454.0
7.5°	5324.8	5313.8	5340.5	5362.6	5406.7	5419.3	5461.8	5482.3	5493.3	5512.3
10°	5105.8	5101.1	5167.2	5250.7	5354.7	5419.3	5483.9	5518.6	5535.9	5586.3
12.5°	4718.3	4724.6	4811.2	4971.9	5179.8	5387.8	5509.1	5559.5	5586.3	5649.3
15°	4348.0	4346.5	4441.0	4612.7	4904.2	5249.2	5521.7	5608.4	5654.0	5747.0
17.5°	4133.8	4127.5	4193.7	4324.4	4595.4	5036.5	5490.2	5635.1	5732.8	5849.4
20°	4094.4	4081.8	4116.5	4181.1	4373.3	4803.3	5408.3	5635.1	5795.8	5947.1
22.5°	4237.8	4217.3	4203.1	4195.2	4280.3	4611.1	5315.3	5616.2	5888.8	6087.3
25°	4526.1	4494.6	4422.1	4351.2	4326.0	4524.5	5233.4	5611.5	6027.4	6276.3
27.5°	4992.4	4953.0	4806.5	4636.3	4483.5	4568.6	5197.2	5639.9	6180.2	6476.4
30°	5570.5	5528.0	5343.7	5082.2	4808.1	4732.4	5242.9	5723.4	6375.6	6742.6
32.5°	6088.8	6041.6	5884.0	5617.8	5247.6	5016.0	5387.8	5882.5	6682.8	7112.8
35°	6548.9	6493.7	6351.9	6106.2	5786.4	5414.6	5649.3	6164.5	7119.1	7714.6
37.5°	6999.4	6934.8	6780.4	6520.5	6296.8	5945.5	6010.1	6526.8	7698.9	8445.6
40°	7503.5	7410.6	7223.1	6966.3	6748.9	6567.8	6484.3	6971.1	8288.1	9261.7
42.5°	7991.9	7903.7	7680.0	7461.0	7188.5	7136.5	7034.1	7490.9	8932.4	10158.1
45°	8518.1	8412.5	8141.6	7864.3	7692.6	7514.6	7566.6	8010.8	9564.1	11071.8
47.5°	9011.2	8893.0	8573.2	8264.4	8169.9	7832.8	8054.9	8582.7	10221.1	11998.1
50°	9277.4	9160.8	8894.6	8615.8	8541.7	8225.1	8584.2	9211.2	10909.5	12921.3
52.5°	9499.5	9373.5	9025.4	8871.0	8848.9	8652.0	9236.5	9929.6	11597.9	13737.3
55°	9735.8	9595.6	9151.4	9012.7	9113.6	9130.9	10010.0	10744.1	12325.8	14532.9
57.5°	10008.4	9830.4	9272.7	9132.5	9371.9	9691.7	10898.5	11588.5	13041.0	15270.2
60°	10265.2	10085.6	9505.8	9323.1	9650.8	10342.4	11917.7	12610.9	13850.7	15927.1
62.5°	10315.6	10167.5	9691.7	9690.2	10028.9	11101.7	13124.5	13642.8	14558.1	16576.1
65°	9442.8	9349.9	9067.9	9676.0	10570.8	12195.0	14468.3	14963.0	15457.6	17143.3
67.5°	7186.9	7199.5	7179.0	8352.7	10132.8	13765.7	16413.9	16376.1	16568.3	17779.7
70°	3286.2	3360.3	3842.4	5765.9	8117.9	13946.8	19630.8	19140.9	17962.5	18603.7
72.5°	1775.5	1832.2	2029.1	2793.1	4880.5	12399.8	22034.8	22383.0	19816.7	19158.2
75°	1302.8	1334.3	1471.4	1775.5	2049.6	9216.0	21173.1	22959.6	20048.3	17864.8
77.5°	975.2	989.3	1101.2	1406.8	1049.2	4858.5	16918.0	19014.8	17162.2	14677.8
80°	707.3	723.1	806.6	1055.5	735.7	1777.0	11616.9	13346.6	11753.9	9356.2
82.5°	488.4	494.7	530.9	718.4	513.6	690.0	6591.4	7826.5	6561.5	3283.1
85°	294.6	302.5	318.2	419.1	291.4	327.7	2845.1	2942.8	1961.3	784.5
87.5°	121.3	129.2	141.8	176.4	115.0	91.4	469.5	589.2	367.1	230.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954834

CATALOG NUMBER: GLAN-SB8A-722-U-SL3

CANDELA DISTRIBUTION (continued):

85°		90°	95°	105°	115°	125°	135°	145°	155°	165°	175°
5375.2	0°	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2	5375.2
5391.0	2.5°	5383.1	5372.0	5342.1	5301.2	5263.3	5216.1	5195.6	5178.3	5162.5	5132.6
5433.5	5°	5416.2	5386.2	5305.9	5201.9	5083.8	4954.6	4828.5	4741.9	4667.9	4612.7
5482.3	7.5°	5466.6	5409.9	5263.3	5050.7	4779.7	4502.4	4252.0	4073.9	3940.0	3891.2
5551.6	10°	5518.6	5450.8	5195.6	4820.7	4352.8	3925.8	3593.4	3410.7	3303.6	3268.9
5633.6	12.5°	5580.0	5480.7	5090.1	4500.9	3875.4	3407.5	3117.7	3010.6	2955.4	2936.5
5734.4	15°	5669.8	5506.0	4930.9	4100.7	3420.1	3029.5	2842.0	2767.9	2739.6	2738.0
5838.4	17.5°	5737.5	5510.7	4683.6	3672.2	3070.4	2801.0	2646.6	2618.3	2637.2	2665.5
5940.8	20°	5813.2	5468.1	4359.1	3281.5	2824.7	2601.0	2536.4	2555.3	2601.0	2641.9
6076.2	22.5°	5866.7	5391.0	3966.8	2977.5	2612.0	2485.9	2482.8	2522.2	2547.4	2567.9
6235.4	25°	5914.0	5260.2	3550.9	2722.3	2437.1	2416.6	2451.3	2438.7	2421.4	2438.7
6394.5	27.5°	5948.6	5053.8	3179.1	2498.6	2314.2	2369.4	2348.9	2320.5	2319.0	2328.4
6581.9	30°	5937.6	4778.1	2873.5	2285.9	2227.6	2281.2	2232.3	2227.6	2222.9	2227.6
6863.9	32.5°	5937.6	4464.6	2638.8	2139.4	2172.4	2152.0	2147.2	2136.2	2117.3	2115.7
7246.7	35°	5970.7	4151.1	2437.1	2060.6	2126.8	2077.9	2081.1	2054.3	2014.9	1996.0
7754.0	37.5°	6038.4	3899.1	2237.0	2022.8	2046.4	2044.8	2032.2	1986.6	1917.2	1857.4
8387.3	40°	6202.3	3825.0	2100.0	2005.5	2008.6	2027.5	1994.4	1906.2	1748.7	1651.0
9030.1	42.5°	6459.1	3949.5	2070.0	1962.9	1983.4	2002.3	1937.7	1732.9	1621.1	1562.8
9704.3	45°	6785.2	4166.9	2134.6	1901.5	1923.5	1956.6	1764.4	1666.8	1616.3	1617.9
10372.3	47.5°	7197.9	4395.3	2254.4	1847.9	1836.9	1855.8	1649.4	1589.6	1520.2	1537.6
11013.5	50°	7675.3	4626.9	2367.8	1775.5	1740.8	1679.4	1575.4	1518.7	1430.4	1389.5
11632.6	52.5°	8192.0	4850.6	2413.5	1687.2	1636.8	1565.9	1525.0	1455.7	1348.5	1280.8
12217.1	55°	8681.9	5053.8	2363.1	1581.7	1532.8	1477.7	1471.4	1428.9	1313.9	1219.3
12736.9	57.5°	9145.1	5224.0	2237.0	1474.6	1427.3	1394.2	1436.7	1416.3	1271.3	1150.0
13228.5	60°	9537.4	5340.5	2054.3	1365.9	1332.8	1315.4	1380.0	1373.7	1211.5	1076.0
13669.6	62.5°	9849.3	5386.2	1852.6	1261.9	1254.0	1222.5	1301.3	1301.3	1135.8	1003.5
14057.1	65°	10093.5	5342.1	1647.8	1159.5	1175.2	1128.0	1205.2	1195.7	1055.5	938.9
14502.9	67.5°	10309.3	5197.2	1421.0	1058.7	1094.9	1035.0	1104.3	1082.3	967.3	874.3
14888.9	70°	10405.4	4860.0	1162.6	957.8	1001.9	943.7	1003.5	962.6	868.0	805.0
14465.1	72.5°	9633.4	4039.3	915.3	852.3	890.1	842.8	894.8	847.6	760.9	732.6
12491.2	75°	7969.8	3031.0	704.2	737.3	765.6	729.4	764.1	729.4	650.6	671.1
9227.0	77.5°	5787.9	2046.4	538.8	616.0	628.6	609.7	639.6	600.2	529.3	524.6
4598.5	80°	2878.2	1198.9	422.2	486.8	482.1	469.5	504.1	485.2	425.4	450.6
1241.4	82.5°	833.4	513.6	307.2	341.9	332.4	335.6	360.8	370.2	554.5	549.8
386.0	85°	261.5	201.6	184.3	190.6	181.2	185.9	212.7	422.2	390.7	228.4
119.7	87.5°	67.7	69.3	45.7	48.8	50.4	59.9	67.7	256.8	122.9	80.3
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END O

180°
5375.2
5118.4
4567.0
3806.1
3215.4
2941.2
2744.3
2676.6
2656.1
2578.9
2449.7
2344.2
2244.9
2136.2
2014.9
1877.9
1663.6
1562.8
1625.8
1581.7
1400.5
1279.2
1219.3
1143.7
1071.3
998.8
932.6
868.0
792.4
708.9
612.8
501.0
445.8
562.4
247.3
85.1
0.0

F REPORT)