

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P945197

Luminaire Tested: **GLAN-SB1B-722-U-SLL**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P945197
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB1B-722-U-SLL
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(1) 70 CRI, 2200K, 450mA LIGHTSQUARE WITH 26 LEDS AND SPILL LIGHT
ELIMINATOR LEFT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4637 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B1 - U0 - G2

Input Watts (W): 39.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
- - - 1/2 Max cd

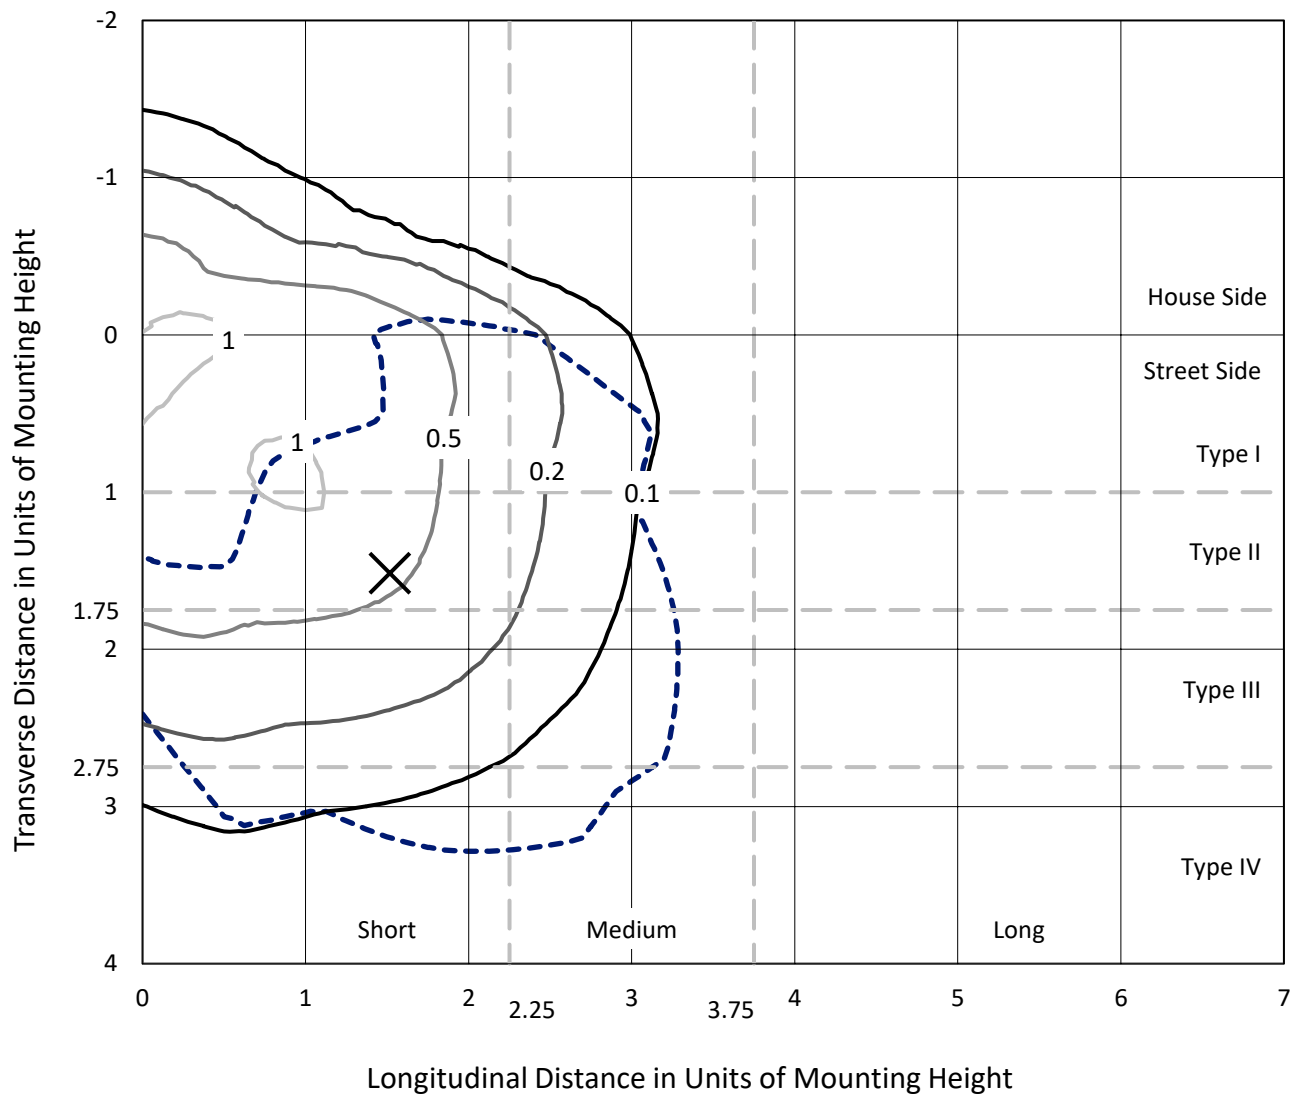

Based on 25 foot mounting height. Maximum calculated value = 1.4 fc
Type IV - Short - N/A

REPORT NUMBER: P945197
CATALOG NUMBER: GLAN-SB1B-722-U-SLL

Luminous Intensity Polar Plot

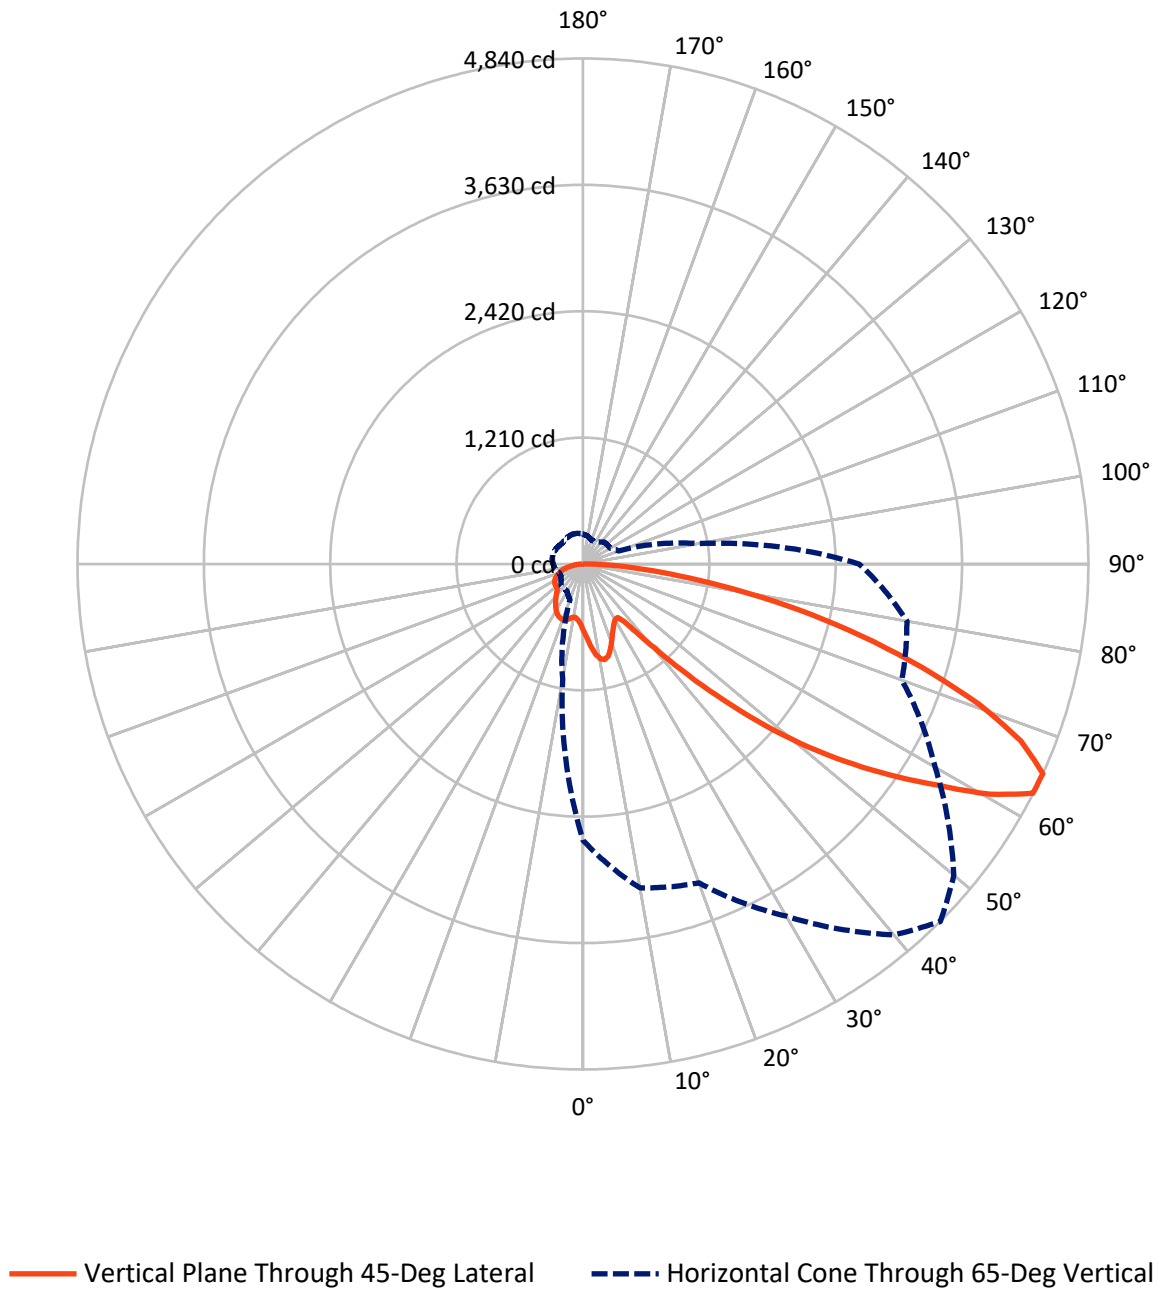

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1178.5	0.0	1178.5
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	3458.5	0.0	3458.5
	% Fixture	74.6	0.0	74.6
Total	Lumens	4637.0	0.0	4637.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.3	1.4
10°-20°	198.6	4.3
20°-30°	306.7	6.6
30°-40°	388.7	8.4
40°-50°	586.2	12.6
50°-60°	947.1	20.4
60°-70°	1180.8	25.5
70°-80°	774.3	16.7
80°-90°	191.4	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	4637.0	100.0
0°-180°	4637.0	100.0

Coefficient of Utilization



REPORT NUMBER: P945197


CATALOG NUMBER: GLAN-SB1B-722-U-SLL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	311.9	6.7			
FM	(30°-60°)	1352.5	29.2			
FH	(60°-80°)	1636.4	35.3			G1/1800
FVH	(80°-90°)	157.7	3.4			G2/225
BL	(0°-30°)	256.6	5.5	B1/500		
BM	(30°-60°)	569.5	12.3	B1/1000		
BH	(60°-80°)	318.6	6.9	B1/500		G1/500
BVH	(80°-90°)	33.7	0.7			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2

Type IV Short

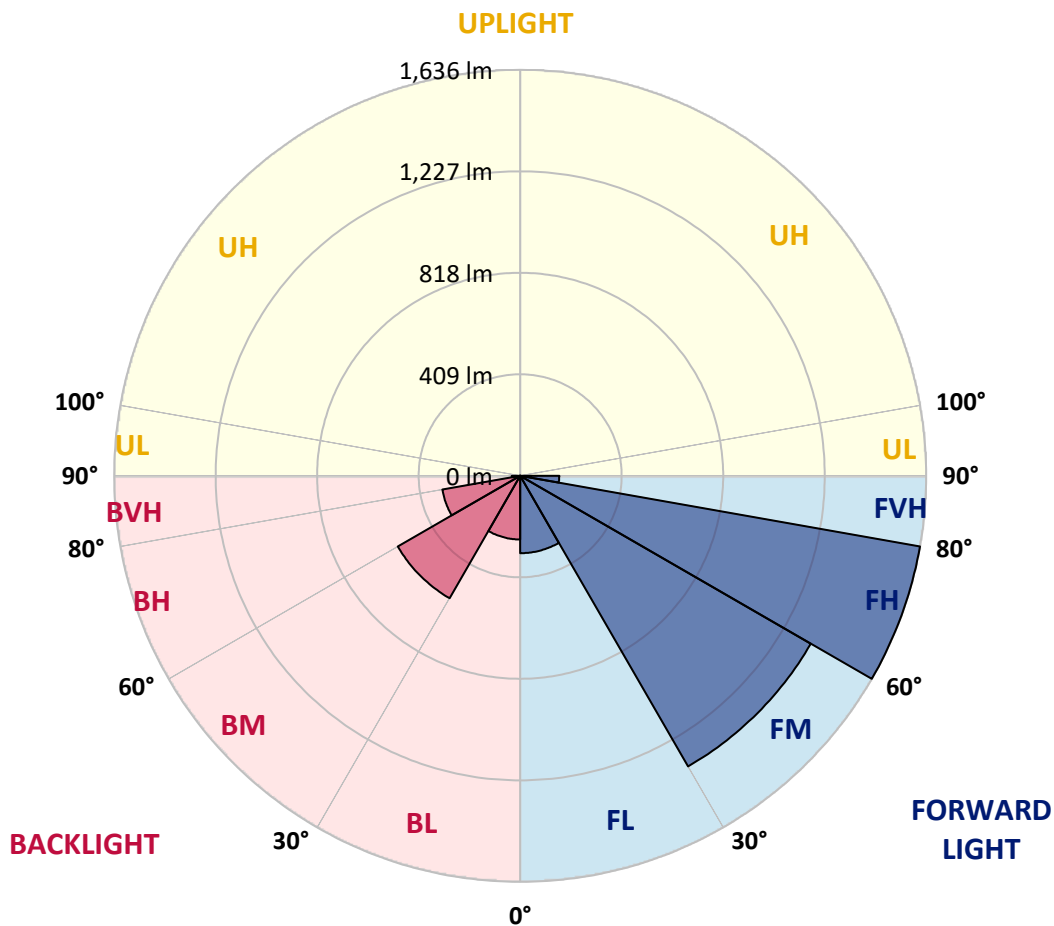

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°
0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6
2.5°	685.7	688.3	690.9	694.6	698.3	700.5	702.7	703.8	704.9	704.4
5°	737.3	746.4	755.5	764.5	773.5	778.4	783.3	786.3	789.3	791.5
7.5°	789.2	804.0	818.7	832.0	845.3	853.3	861.3	865.6	869.9	872.0
10°	829.0	846.4	863.9	879.5	895.1	904.5	913.9	918.1	922.3	923.9
12.5°	853.3	872.2	891.2	905.3	919.3	926.2	933.0	935.3	937.6	937.8
15°	868.1	884.5	900.8	909.6	918.5	918.7	919.0	916.5	914.1	911.2
17.5°	876.4	887.5	898.5	898.7	898.8	888.9	879.0	869.9	860.8	854.4
20°	885.6	889.4	893.3	881.7	870.1	848.2	826.3	810.4	794.5	784.7
22.5°	896.3	891.2	886.2	862.1	838.0	805.8	773.7	753.8	733.8	723.0
25°	910.0	894.0	878.1	841.6	805.0	766.0	726.9	705.9	685.0	674.8
27.5°	928.5	900.1	871.7	823.2	774.8	731.5	688.2	667.6	647.0	637.4
30°	953.6	911.2	868.8	809.2	749.6	704.5	659.4	640.3	621.2	612.2
32.5°	983.2	925.2	867.1	799.7	732.3	689.9	647.5	632.5	617.4	611.0
35°	1019.2	948.1	877.1	806.8	736.6	707.1	677.7	674.2	670.7	670.2
37.5°	1079.8	996.2	912.6	848.7	784.9	783.0	781.1	797.1	813.1	821.4
40°	1171.3	1080.4	989.5	942.0	894.5	928.0	961.5	1000.4	1039.3	1058.7
42.5°	1292.6	1202.4	1112.3	1084.9	1057.5	1130.7	1203.8	1274.5	1345.3	1386.8
45°	1442.5	1361.5	1280.4	1268.4	1256.3	1373.4	1490.6	1606.8	1723.1	1793.7
47.5°	1629.9	1551.1	1472.3	1469.8	1467.4	1636.3	1805.3	1975.5	2145.7	2245.6
50°	1875.6	1778.2	1680.9	1681.3	1681.7	1899.5	2117.2	2341.9	2566.6	2702.5
52.5°	2157.6	2039.7	1921.8	1909.9	1898.0	2158.1	2418.2	2696.2	2974.2	3137.0
55°	2457.8	2341.3	2224.8	2178.4	2131.9	2421.4	2710.9	3042.3	3373.7	3567.4
57.5°	2730.8	2667.4	2604.0	2510.8	2417.6	2709.9	3002.2	3377.6	3753.0	3993.1
60°	2895.9	2994.4	3092.9	2977.2	2861.4	3138.1	3414.7	3816.6	4218.5	4478.1
62.5°	2812.1	3081.2	3350.4	3337.4	3324.3	3577.7	3831.1	4213.5	4595.9	4835.8
65°	2644.3	2897.0	3149.6	3199.6	3249.6	3571.6	3893.7	4264.4	4635.2	4839.5
67.5°	2419.6	2659.9	2900.2	2923.6	2947.0	3282.6	3618.1	3990.5	4362.8	4522.8
70°	2149.6	2410.9	2672.3	2682.8	2693.3	2993.4	3293.4	3613.9	3934.3	4023.2
72.5°	1827.9	2127.8	2427.7	2435.2	2442.7	2677.5	2912.3	3152.3	3392.2	3401.3
75°	1420.8	1731.2	2041.6	2069.5	2097.4	2280.0	2462.7	2631.6	2800.6	2755.3
77.5°	1015.2	1304.9	1594.7	1634.6	1674.4	1813.3	1952.2	2072.0	2191.8	2114.0
80°	664.4	908.2	1151.9	1201.5	1251.1	1355.9	1460.8	1523.7	1586.6	1461.5
82.5°	386.2	552.9	719.5	774.9	830.3	902.5	974.7	1000.9	1027.2	928.8
85°	169.9	258.4	346.8	393.9	441.0	500.3	559.6	574.5	589.4	510.6
87.5°	52.6	82.3	112.1	138.3	164.6	194.3	223.9	225.2	226.4	190.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (continued):

50°		55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
637.6	0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6
704.9	2.5°	703.8	702.7	700.5	698.3	694.6	690.9	688.3	685.7	680.4	675.2
789.3	5°	786.3	783.3	778.4	773.5	764.5	755.5	746.4	737.3	725.7	714.1
869.9	7.5°	865.6	861.3	853.3	845.3	832.0	818.7	804.0	789.2	770.0	750.9
922.3	10°	918.1	913.9	904.5	895.1	879.5	863.9	846.4	829.0	804.7	780.5
937.6	12.5°	935.3	933.0	926.2	919.3	905.3	891.2	872.2	853.3	826.7	800.0
914.1	15°	916.5	919.0	918.7	918.5	909.6	900.8	884.5	868.1	840.3	812.6
860.8	17.5°	869.9	879.0	888.9	898.8	898.7	898.5	887.5	876.4	848.3	820.1
794.5	20°	810.4	826.3	848.2	870.1	881.7	893.3	889.4	885.6	856.3	827.1
733.8	22.5°	753.8	773.7	805.8	838.0	862.1	886.2	891.2	896.3	866.4	836.4
685.0	25°	705.9	726.9	766.0	805.0	841.6	878.1	894.0	910.0	880.6	851.4
647.0	27.5°	667.6	688.2	731.5	774.8	823.2	871.7	900.1	928.5	900.6	872.6
621.2	30°	640.3	659.4	704.5	749.6	809.2	868.8	911.2	953.6	926.6	899.6
617.4	32.5°	632.5	647.5	689.9	732.3	799.7	867.1	925.2	983.2	956.5	929.8
670.7	35°	674.2	677.7	707.1	736.6	806.8	877.1	948.1	1019.2	993.6	968.0
813.1	37.5°	797.1	781.1	783.0	784.9	848.7	912.6	996.2	1079.8	1047.1	1014.5
1039.3	40°	1000.4	961.5	928.0	894.5	942.0	989.5	1080.4	1171.3	1123.7	1076.1
1345.3	42.5°	1274.5	1203.8	1130.7	1057.5	1084.9	1112.3	1202.4	1292.6	1224.0	1155.3
1723.1	45°	1606.8	1490.6	1373.4	1256.3	1268.4	1280.4	1361.5	1442.5	1349.9	1257.3
2145.7	47.5°	1975.5	1805.3	1636.3	1467.4	1469.8	1472.3	1551.1	1629.9	1499.6	1369.2
2566.6	50°	2341.9	2117.2	1899.5	1681.7	1681.3	1680.9	1778.2	1875.6	1679.1	1482.5
2974.2	52.5°	2696.2	2418.2	2158.1	1898.0	1909.9	1921.8	2039.7	2157.6	1867.6	1577.7
3373.7	55°	3042.3	2710.9	2421.4	2131.9	2178.4	2224.8	2341.3	2457.8	2034.8	1611.8
3753.0	57.5°	3377.6	3002.2	2709.9	2417.6	2510.8	2604.0	2667.4	2730.8	2153.3	1575.7
4218.5	60°	3816.6	3414.7	3138.1	2861.4	2977.2	3092.9	2994.4	2895.9	2182.9	1469.8
4595.9	62.5°	4213.5	3831.1	3577.7	3324.3	3337.4	3350.4	3081.2	2812.1	2058.2	1304.3
4635.2	65°	4264.4	3893.7	3571.6	3249.6	3199.6	3149.6	2897.0	2644.3	1881.8	1119.3
4362.8	67.5°	3990.5	3618.1	3282.6	2947.0	2923.6	2900.2	2659.9	2419.6	1671.9	924.2
3934.3	70°	3613.9	3293.4	2993.4	2693.3	2682.8	2672.3	2410.9	2149.6	1442.9	736.1
3392.2	72.5°	3152.3	2912.3	2677.5	2442.7	2435.2	2427.7	2127.8	1827.9	1194.6	561.3
2800.6	75°	2631.6	2462.7	2280.0	2097.4	2069.5	2041.6	1731.2	1420.8	909.9	399.0
2191.8	77.5°	2072.0	1952.2	1813.3	1674.4	1634.6	1594.7	1304.9	1015.2	636.9	258.6
1586.6	80°	1523.7	1460.8	1355.9	1251.1	1201.5	1151.9	908.2	664.4	410.3	156.2
1027.2	82.5°	1000.9	974.7	902.5	830.3	774.9	719.5	552.9	386.2	237.5	88.8
589.4	85°	574.5	559.6	500.3	441.0	393.9	346.8	258.4	169.9	106.8	43.7
226.4	87.5°	225.2	223.9	194.3	164.6	138.3	112.1	82.3	52.6	35.0	17.4
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (continued):

105°		110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
637.6	0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6
669.6	2.5°	664.0	658.4	652.7	647.4	642.0	636.8	631.0	626.3	621.6	617.4
702.5	5°	690.9	679.2	667.6	656.7	645.8	635.5	625.4	616.5	607.7	600.2
733.1	7.5°	715.4	698.2	680.9	665.7	650.5	636.5	623.4	611.6	599.8	590.0
757.1	10°	733.7	712.7	691.7	673.8	655.8	638.5	624.4	611.9	599.5	589.7
773.5	12.5°	747.0	722.3	697.6	677.2	656.9	638.7	625.6	615.4	605.3	598.8
783.8	15°	755.0	726.6	698.1	674.6	651.0	630.9	620.4	615.5	610.7	611.5
788.7	17.5°	757.3	724.3	691.3	663.0	634.6	611.0	604.5	606.3	608.0	618.7
792.6	20°	758.1	718.0	678.0	642.9	607.8	580.3	578.5	586.9	595.2	613.7
797.7	22.5°	759.0	710.3	661.7	619.4	577.1	545.8	549.1	561.4	573.7	594.9
807.1	25°	762.9	702.8	642.6	593.1	543.7	511.5	520.5	534.7	548.9	567.9
821.8	27.5°	771.0	697.7	624.4	569.1	513.9	484.6	495.6	509.3	523.0	538.6
840.8	30°	782.0	695.3	608.6	549.1	489.6	465.0	473.6	484.5	495.4	508.4
860.7	32.5°	791.6	692.4	593.1	531.8	470.4	450.6	454.4	460.8	467.3	477.6
883.3	35°	798.6	686.9	575.2	514.8	454.4	437.8	436.3	438.0	439.8	447.7
908.6	37.5°	802.7	677.4	552.0	494.8	437.5	423.0	417.2	415.3	413.3	419.0
940.8	40°	805.4	664.3	523.4	470.9	418.4	405.3	396.4	391.9	387.5	391.6
982.8	42.5°	810.3	650.9	491.5	444.5	397.6	385.5	374.2	368.4	362.5	365.8
1038.2	45°	819.1	638.4	457.7	416.5	375.3	363.1	352.2	346.5	340.8	343.6
1097.1	47.5°	825.0	628.1	431.1	394.4	357.7	341.9	332.6	327.8	323.0	325.6
1151.8	50°	821.1	616.8	412.5	379.7	346.9	326.2	315.3	311.0	306.8	310.9
1187.4	52.5°	797.0	597.8	398.6	370.0	341.4	317.6	302.4	298.2	294.0	300.2
1179.5	55°	747.2	566.3	385.3	363.0	340.6	318.4	295.5	288.9	282.2	291.0
1124.4	57.5°	673.2	521.8	370.4	354.7	338.9	319.3	291.4	281.7	272.0	281.5
1021.9	60°	574.0	464.2	354.3	341.9	329.5	316.6	287.5	275.0	262.4	270.7
883.2	62.5°	462.1	395.1	328.1	319.8	311.6	310.0	283.0	267.3	251.6	256.9
741.8	65°	364.3	333.0	301.7	297.8	293.9	294.1	273.5	256.9	240.2	242.2
603.2	67.5°	282.2	273.3	264.4	266.6	268.7	268.2	256.6	242.7	228.8	228.2
474.9	70°	213.7	216.3	218.8	228.9	238.9	238.9	235.1	225.2	215.4	213.2
363.1	72.5°	164.9	172.5	180.2	194.5	208.8	211.2	211.2	204.4	197.6	194.4
263.5	75°	128.0	135.0	141.9	157.9	173.9	185.0	184.0	178.8	173.6	170.5
178.6	77.5°	98.6	103.3	108.0	123.6	139.1	157.3	156.8	152.7	148.5	145.3
115.0	80°	73.9	75.8	77.8	91.0	104.1	125.9	125.8	122.3	118.8	116.2
70.8	82.5°	52.8	53.1	53.5	63.2	72.9	91.5	92.5	90.8	89.1	87.3
37.8	85°	31.9	31.8	31.6	38.7	45.8	59.6	60.9	59.1	57.3	55.2
15.7	87.5°	14.0	13.8	13.7	16.5	19.5	25.2	26.9	26.2	25.4	25.1
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (continued):

160°		165°	170°	175°	180°	185°	190°	195°	200°	205°	210°
637.6	0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6
613.2	2.5°	609.5	605.8	602.1	598.4	595.5	592.6	590.3	588.0	586.1	584.3
592.8	5°	586.2	579.7	573.7	567.8	563.2	558.6	555.4	552.2	549.9	547.6
580.3	7.5°	572.0	563.7	556.4	549.2	543.7	538.3	534.5	530.7	528.0	525.4
579.9	10°	571.1	562.1	553.9	545.8	539.2	532.7	528.5	524.1	521.7	519.2
592.3	12.5°	585.3	578.4	569.9	561.4	553.1	544.8	539.3	533.8	531.0	528.3
612.4	15°	610.6	608.8	601.4	594.1	582.2	570.4	562.0	553.7	549.8	546.0
629.4	17.5°	635.0	640.7	634.7	628.8	613.1	597.5	585.1	572.8	567.1	561.4
632.2	20°	644.1	656.0	653.2	650.5	632.5	614.6	599.5	584.4	577.1	569.9
616.0	22.5°	631.5	646.9	648.6	650.2	633.1	616.0	600.4	584.8	577.2	569.5
587.0	25°	602.2	617.4	623.0	628.7	614.7	600.6	586.8	573.0	566.3	559.7
554.2	27.5°	566.4	578.6	584.9	591.3	581.3	571.3	560.5	549.8	545.3	540.9
521.4	30°	531.5	541.6	546.7	551.9	544.3	536.6	528.9	521.2	518.9	516.6
488.0	32.5°	497.7	507.4	513.1	518.8	511.8	504.8	498.7	492.5	491.0	489.5
455.6	35°	465.2	474.8	481.6	488.5	483.5	478.5	472.9	467.2	464.9	462.7
424.6	37.5°	434.2	443.8	452.3	460.7	458.4	456.1	450.9	445.7	441.5	437.4
395.7	40°	404.9	414.2	423.9	433.7	434.3	434.8	430.4	425.9	419.9	413.9
369.2	42.5°	377.9	386.7	397.2	407.8	410.6	413.4	409.6	405.9	398.5	391.0
346.4	45°	354.7	363.1	374.0	384.9	388.9	393.0	389.6	386.2	377.7	369.2
328.2	47.5°	336.4	344.5	355.3	366.0	370.7	375.3	373.0	370.6	363.1	355.5
315.0	50°	322.7	330.4	340.0	349.6	355.6	361.6	361.4	361.3	355.3	349.2
306.3	52.5°	313.4	320.4	329.4	338.4	345.5	352.5	353.8	355.1	350.1	345.2
299.8	55°	307.4	314.9	322.8	330.7	338.2	345.7	347.4	349.2	344.9	340.6
290.9	57.5°	299.8	308.7	316.5	324.3	331.9	339.4	341.2	343.0	338.6	334.3
279.0	60°	289.2	299.4	307.3	315.3	322.9	330.4	332.4	334.4	330.1	325.9
262.2	62.5°	274.1	286.0	294.5	302.9	309.9	316.8	318.7	320.6	316.7	312.9
244.2	65°	257.0	269.8	277.8	285.9	292.0	298.1	300.1	302.0	298.3	294.6
227.5	67.5°	239.3	251.2	258.8	266.5	271.7	277.0	278.9	280.8	277.4	274.0
211.0	70°	221.3	231.7	238.3	244.9	249.7	254.5	256.3	258.1	255.3	252.6
191.2	72.5°	199.4	207.5	213.5	219.5	224.1	228.8	231.0	233.1	230.8	228.5
167.4	75°	173.5	179.5	185.0	190.4	194.6	198.9	201.1	203.4	202.2	201.1
142.2	77.5°	147.1	152.1	156.7	161.4	165.8	170.3	172.4	174.5	172.9	171.3
113.5	80°	117.6	121.7	125.6	129.6	133.0	136.3	139.1	141.9	141.2	140.6
85.4	82.5°	85.0	84.7	83.3	82.0	89.2	96.5	101.2	105.9	105.7	105.3
53.1	85°	51.3	49.5	45.8	42.0	48.7	55.5	61.4	67.3	66.8	66.3
24.7	87.5°	24.6	24.5	21.6	18.7	21.6	24.4	26.8	29.2	28.6	27.9
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (continued):

215°		220°	225°	230°	235°	240°	245°	250°	255°	260°	265°
637.6	0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6
582.7	2.5°	581.0	578.9	581.0	582.7	584.3	586.1	588.0	590.3	592.6	595.5
545.9	5°	544.2	542.4	544.2	545.9	547.6	549.9	552.2	555.4	558.6	563.2
523.9	7.5°	522.3	521.2	522.3	523.9	525.4	528.0	530.7	534.5	538.3	543.7
517.9	10°	516.6	516.0	516.6	517.9	519.2	521.7	524.1	528.5	532.7	539.2
527.1	12.5°	526.0	525.8	526.0	527.1	528.3	531.0	533.8	539.3	544.8	553.1
544.5	15°	543.1	542.9	543.1	544.5	546.0	549.8	553.7	562.0	570.4	582.2
559.6	17.5°	557.7	557.4	557.7	559.6	561.4	567.1	572.8	585.1	597.5	613.1
567.5	20°	565.2	564.5	565.2	567.5	569.9	577.1	584.4	599.5	614.6	632.5
566.9	22.5°	564.3	563.2	564.3	566.9	569.5	577.2	584.8	600.4	616.0	633.1
557.3	25°	554.9	553.5	554.9	557.3	559.7	566.3	573.0	586.8	600.6	614.7
539.8	27.5°	538.7	538.3	538.7	539.8	540.9	545.3	549.8	560.5	571.3	581.3
516.6	30°	516.6	517.0	516.6	516.6	516.6	518.9	521.2	528.9	536.6	544.3
489.7	32.5°	490.0	490.3	490.0	489.7	489.5	491.0	492.5	498.7	504.8	511.8
462.2	35°	461.7	461.5	461.7	462.2	462.7	464.9	467.2	472.9	478.5	483.5
435.3	37.5°	433.1	431.9	433.1	435.3	437.4	441.5	445.7	450.9	456.1	458.4
409.9	40°	405.9	403.5	405.9	409.9	413.9	419.9	425.9	430.4	434.8	434.3
385.1	42.5°	379.2	375.3	379.2	385.1	391.0	398.5	405.9	409.6	413.4	410.6
362.2	45°	355.3	350.9	355.3	362.2	369.2	377.7	386.2	389.6	393.0	388.9
349.1	47.5°	342.7	338.4	342.7	349.1	355.5	363.1	370.6	373.0	375.3	370.7
343.3	50°	337.4	333.2	337.4	343.3	349.2	355.3	361.3	361.4	361.6	355.6
339.9	52.5°	334.6	330.8	334.6	339.9	345.2	350.1	355.1	353.8	352.5	345.5
335.9	55°	331.3	327.9	331.3	335.9	340.6	344.9	349.2	347.4	345.7	338.2
329.7	57.5°	325.1	321.5	325.1	329.7	334.3	338.6	343.0	341.2	339.4	331.9
321.1	60°	316.4	312.7	316.4	321.1	325.9	330.1	334.4	332.4	330.4	322.9
307.9	62.5°	302.9	298.5	302.9	307.9	312.9	316.7	320.6	318.7	316.8	309.9
289.7	65°	284.9	281.1	284.9	289.7	294.6	298.3	302.0	300.1	298.1	292.0
269.5	67.5°	265.0	261.6	265.0	269.5	274.0	277.4	280.8	278.9	277.0	271.7
248.2	70°	243.9	240.0	243.9	248.2	252.6	255.3	258.1	256.3	254.5	249.7
224.4	72.5°	220.3	216.5	220.3	224.4	228.5	230.8	233.1	231.0	228.8	224.1
197.7	75°	194.2	190.6	194.2	197.7	201.1	202.2	203.4	201.1	198.9	194.6
167.8	77.5°	164.4	161.5	164.4	167.8	171.3	172.9	174.5	172.4	170.3	165.8
135.9	80°	131.2	125.8	131.2	135.9	140.6	141.2	141.9	139.1	136.3	133.0
101.4	82.5°	97.4	94.0	97.4	101.4	105.3	105.7	105.9	101.2	96.5	89.2
63.2	85°	60.1	57.0	60.1	63.2	66.3	66.8	67.3	61.4	55.5	48.7
26.4	87.5°	24.8	23.2	24.8	26.4	27.9	28.6	29.2	26.8	24.4	21.6
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (continued):

270°		275°	280°	285°	290°	295°	300°	305°	310°	315°	320°
637.6	0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6	637.6
598.4	2.5°	602.1	605.8	609.5	613.2	617.4	621.6	626.3	631.0	636.8	642.0
567.8	5°	573.7	579.7	586.2	592.8	600.2	607.7	616.5	625.4	635.5	645.8
549.2	7.5°	556.4	563.7	572.0	580.3	590.0	599.8	611.6	623.4	636.5	650.5
545.8	10°	553.9	562.1	571.1	579.9	589.7	599.5	611.9	624.4	638.5	655.8
561.4	12.5°	569.9	578.4	585.3	592.3	598.8	605.3	615.4	625.6	638.7	656.9
594.1	15°	601.4	608.8	610.6	612.4	611.5	610.7	615.5	620.4	630.9	651.0
628.8	17.5°	634.7	640.7	635.0	629.4	618.7	608.0	606.3	604.5	611.0	634.6
650.5	20°	653.2	656.0	644.1	632.2	613.7	595.2	586.9	578.5	580.3	607.8
650.2	22.5°	648.6	646.9	631.5	616.0	594.9	573.7	561.4	549.1	545.8	577.1
628.7	25°	623.0	617.4	602.2	587.0	567.9	548.9	534.7	520.5	511.5	543.7
591.3	27.5°	584.9	578.6	566.4	554.2	538.6	523.0	509.3	495.6	484.6	513.9
551.9	30°	546.7	541.6	531.5	521.4	508.4	495.4	484.5	473.6	465.0	489.6
518.8	32.5°	513.1	507.4	497.7	488.0	477.6	467.3	460.8	454.4	450.6	470.4
488.5	35°	481.6	474.8	465.2	455.6	447.7	439.8	438.0	436.3	437.8	454.4
460.7	37.5°	452.3	443.8	434.2	424.6	419.0	413.3	415.3	417.2	423.0	437.5
433.7	40°	423.9	414.2	404.9	395.7	391.6	387.5	391.9	396.4	405.3	418.4
407.8	42.5°	397.2	386.7	377.9	369.2	365.8	362.5	368.4	374.2	385.5	397.6
384.9	45°	374.0	363.1	354.7	346.4	343.6	340.8	346.5	352.2	363.1	375.3
366.0	47.5°	355.3	344.5	336.4	328.2	325.6	323.0	327.8	332.6	341.9	357.7
349.6	50°	340.0	330.4	322.7	315.0	310.9	306.8	311.0	315.3	326.2	346.9
338.4	52.5°	329.4	320.4	313.4	306.3	300.2	294.0	298.2	302.4	317.6	341.4
330.7	55°	322.8	314.9	307.4	299.8	291.0	282.2	288.9	295.5	318.4	340.6
324.3	57.5°	316.5	308.7	299.8	290.9	281.5	272.0	281.7	291.4	319.3	338.9
315.3	60°	307.3	299.4	289.2	279.0	270.7	262.4	275.0	287.5	316.6	329.5
302.9	62.5°	294.5	286.0	274.1	262.2	256.9	251.6	267.3	283.0	310.0	311.6
285.9	65°	277.8	269.8	257.0	244.2	242.2	240.2	256.9	273.5	294.1	293.9
266.5	67.5°	258.8	251.2	239.3	227.5	228.2	228.8	242.7	256.6	268.2	268.7
244.9	70°	238.3	231.7	221.3	211.0	213.2	215.4	225.2	235.1	238.9	238.9
219.5	72.5°	213.5	207.5	199.4	191.2	194.4	197.6	204.4	211.2	211.2	208.8
190.4	75°	185.0	179.5	173.5	167.4	170.5	173.6	178.8	184.0	185.0	173.9
161.4	77.5°	156.7	152.1	147.1	142.2	145.3	148.5	152.7	156.8	157.3	139.1
129.6	80°	125.6	121.7	117.6	113.5	116.2	118.8	122.3	125.8	125.9	104.1
82.0	82.5°	83.3	84.7	85.0	85.4	87.3	89.1	90.8	92.5	91.5	72.9
42.0	85°	45.8	49.5	51.3	53.1	55.2	57.3	59.1	60.9	59.6	45.8
18.7	87.5°	21.6	24.5	24.6	24.7	25.1	25.4	26.2	26.9	25.2	19.5
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945197

CATALOG NUMBER: GLAN-SB1B-722-U-SLL

CANDELA DISTRIBUTION (continued):

325°		330°	335°	340°	345°	350°	355°	360°
637.6	0°	637.6	637.6	637.6	637.6	637.6	637.6	637.6
647.4	2.5°	652.7	658.4	664.0	669.6	675.2	680.4	685.7
656.7	5°	667.6	679.2	690.9	702.5	714.1	725.7	737.3
665.7	7.5°	680.9	698.2	715.4	733.1	750.9	770.0	789.2
673.8	10°	691.7	712.7	733.7	757.1	780.5	804.7	829.0
677.2	12.5°	697.6	722.3	747.0	773.5	800.0	826.7	853.3
674.6	15°	698.1	726.6	755.0	783.8	812.6	840.3	868.1
663.0	17.5°	691.3	724.3	757.3	788.7	820.1	848.3	876.4
642.9	20°	678.0	718.0	758.1	792.6	827.1	856.3	885.6
619.4	22.5°	661.7	710.3	759.0	797.7	836.4	866.4	896.3
593.1	25°	642.6	702.8	762.9	807.1	851.4	880.6	910.0
569.1	27.5°	624.4	697.7	771.0	821.8	872.6	900.6	928.5
549.1	30°	608.6	695.3	782.0	840.8	899.6	926.6	953.6
531.8	32.5°	593.1	692.4	791.6	860.7	929.8	956.5	983.2
514.8	35°	575.2	686.9	798.6	883.3	968.0	993.6	1019.2
494.8	37.5°	552.0	677.4	802.7	908.6	1014.5	1047.1	1079.8
470.9	40°	523.4	664.3	805.4	940.8	1076.1	1123.7	1171.3
444.5	42.5°	491.5	650.9	810.3	982.8	1155.3	1224.0	1292.6
416.5	45°	457.7	638.4	819.1	1038.2	1257.3	1349.9	1442.5
394.4	47.5°	431.1	628.1	825.0	1097.1	1369.2	1499.6	1629.9
379.7	50°	412.5	616.8	821.1	1151.8	1482.5	1679.1	1875.6
370.0	52.5°	398.6	597.8	797.0	1187.4	1577.7	1867.6	2157.6
363.0	55°	385.3	566.3	747.2	1179.5	1611.8	2034.8	2457.8
354.7	57.5°	370.4	521.8	673.2	1124.4	1575.7	2153.3	2730.8
341.9	60°	354.3	464.2	574.0	1021.9	1469.8	2182.9	2895.9
319.8	62.5°	328.1	395.1	462.1	883.2	1304.3	2058.2	2812.1
297.8	65°	301.7	333.0	364.3	741.8	1119.3	1881.8	2644.3
266.6	67.5°	264.4	273.3	282.2	603.2	924.2	1671.9	2419.6
228.9	70°	218.8	216.3	213.7	474.9	736.1	1442.9	2149.6
194.5	72.5°	180.2	172.5	164.9	363.1	561.3	1194.6	1827.9
157.9	75°	141.9	135.0	128.0	263.5	399.0	909.9	1420.8
123.6	77.5°	108.0	103.3	98.6	178.6	258.6	636.9	1015.2
91.0	80°	77.8	75.8	73.9	115.0	156.2	410.3	664.4
63.2	82.5°	53.5	53.1	52.8	70.8	88.8	237.5	386.2
38.7	85°	31.6	31.8	31.9	37.8	43.7	106.8	169.9
16.5	87.5°	13.7	13.8	14.0	15.7	17.4	35.0	52.6
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)