

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P951301

Luminaire Tested: **GLAN-SB5C-730-U-AFL**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P951301
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB5C-730-U-AFL
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(5) 70 CRI, 3000K, 615mA LIGHTSQUARES WITH 26 LEDS EACH AND AUTOMOTIVE
FRONTLINE OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 38475 lumens
Efficiency: N/A
Efficacy: 154.2 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type II - Short
BUG Rating: B3 - U0 - G3


Input Watts (W): 249.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P951301
CATALOG NUMBER: GLAN-SB5C-730-U-AFL

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
- - - 1/2 Max cd

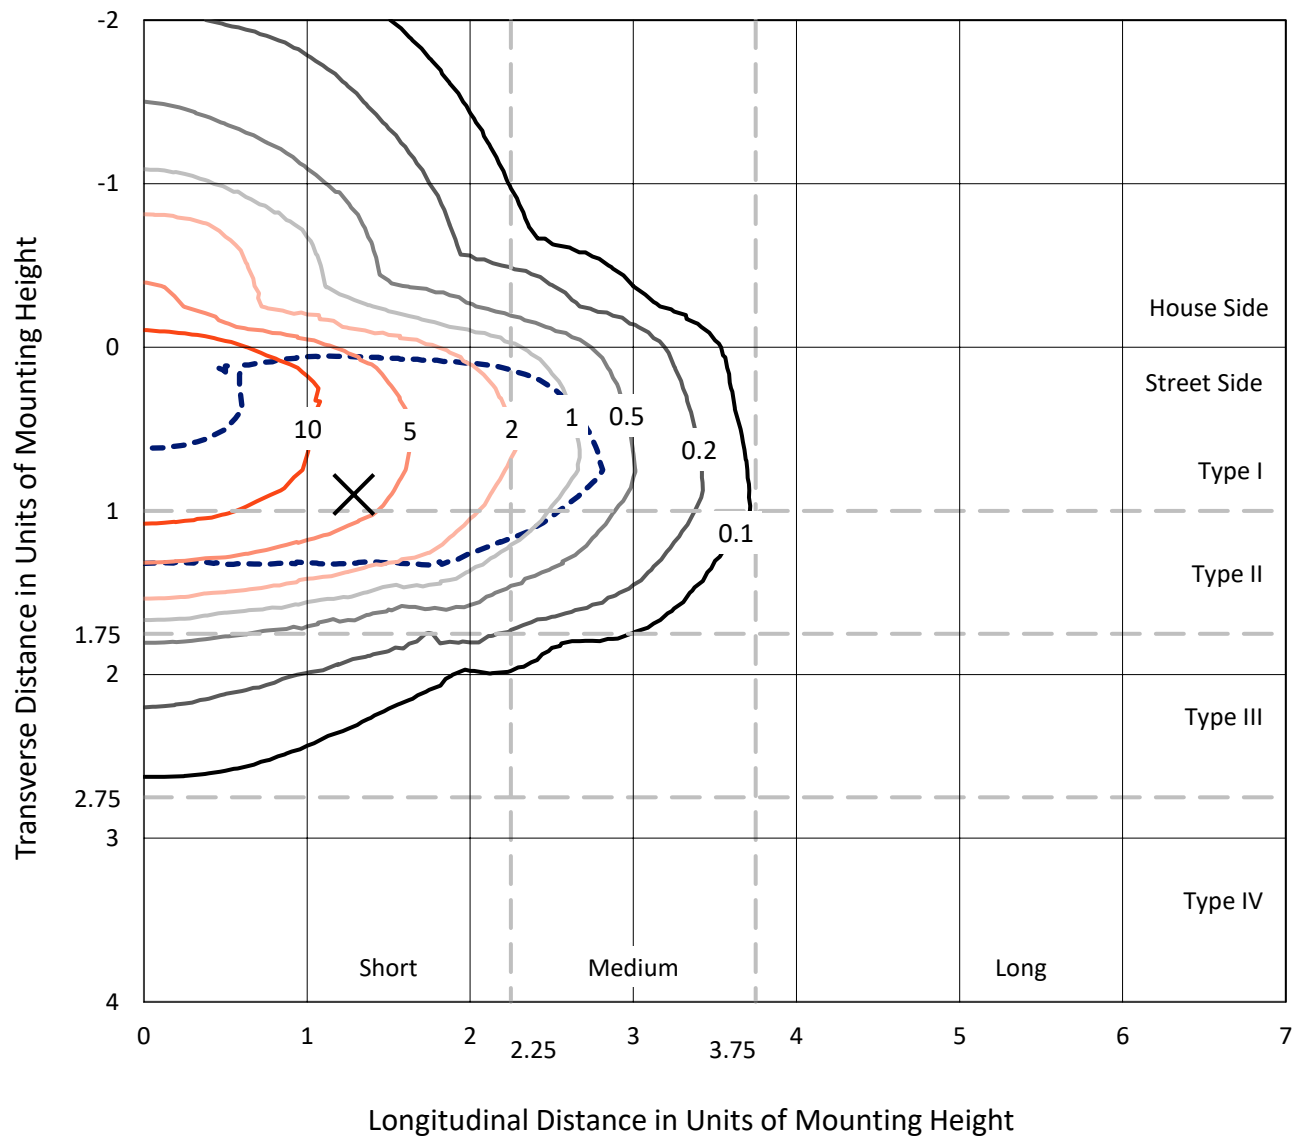

Based on 25 foot mounting height. Maximum calculated value = 18.6 fc
Type II - Short - N/A

REPORT NUMBER: P951301
CATALOG NUMBER: GLAN-SB5C-730-U-AFL

Luminous Intensity Polar Plot

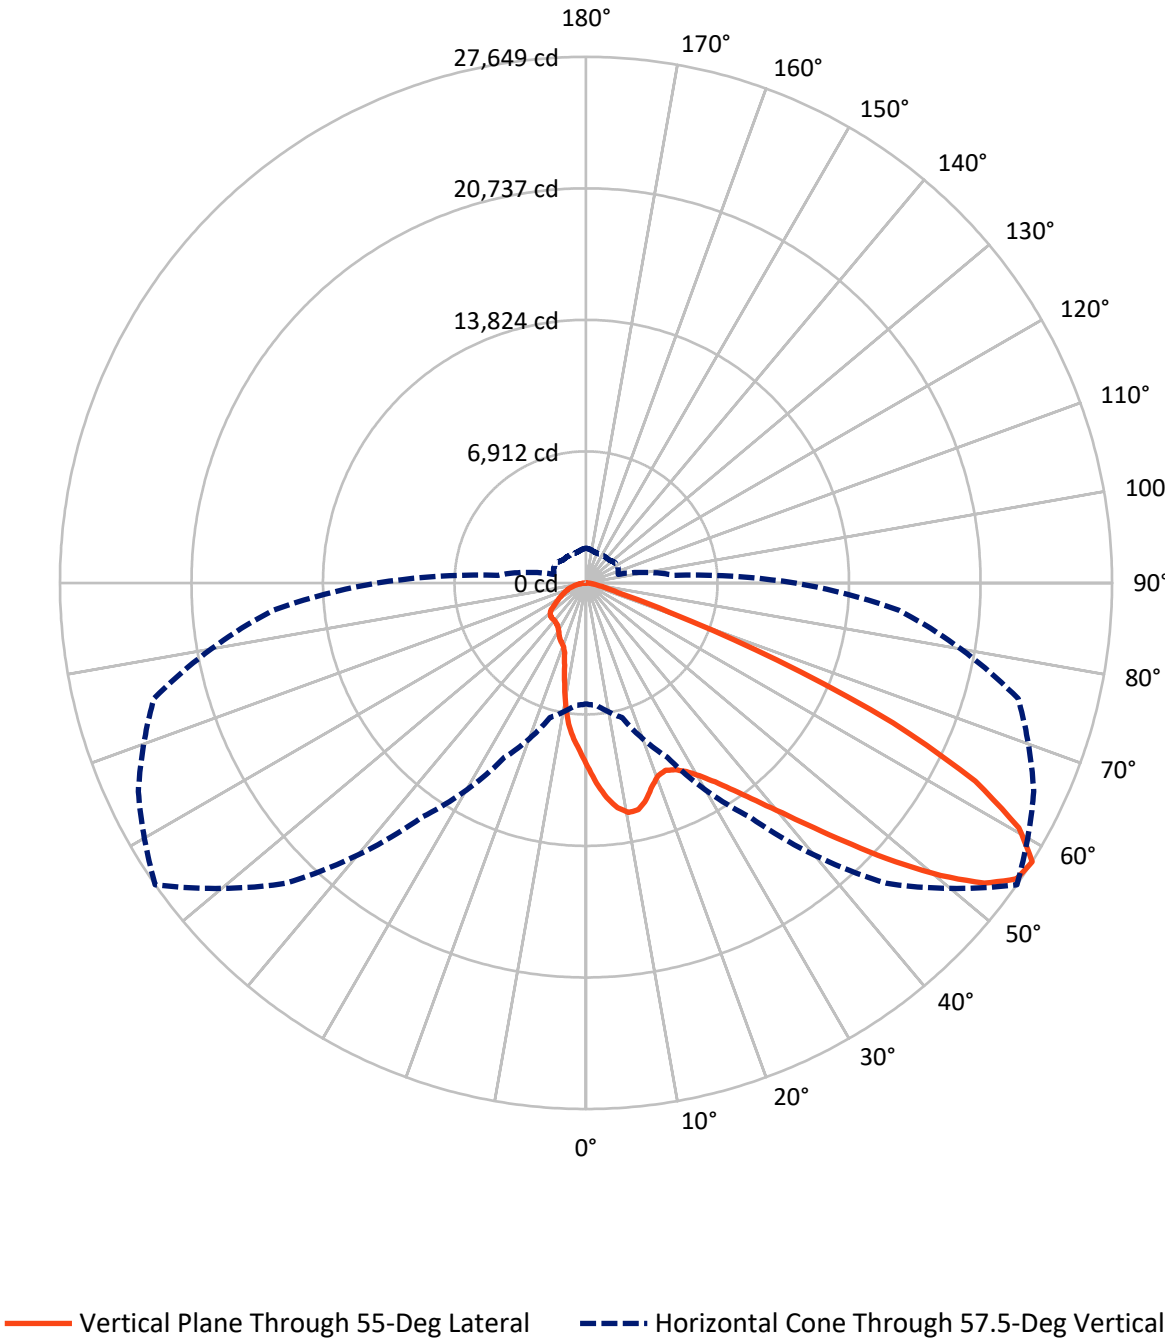

REPORT NUMBER: P951301

CATALOG NUMBER: GLAN-SB5C-730-U-AFL


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	6961.9	0.0	6961.9
	% Fixture	18.1	0.0	18.1
Street Side	Lumens	31513.1	0.0	31513.1
	% Fixture	81.9	0.0	81.9
Total	Lumens	38475.0	0.0	38475.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	894.6	2.3
10°-20°	2258.0	5.9
20°-30°	3603.1	9.4
30°-40°	5704.6	14.8
40°-50°	8731.5	22.7
50°-60°	9352.2	24.3
60°-70°	5883.5	15.3
70°-80°	1739.9	4.5
80°-90°	307.6	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	38475.0	100.0
0°-180°	38475.0	100.0

Coefficient of Utilization

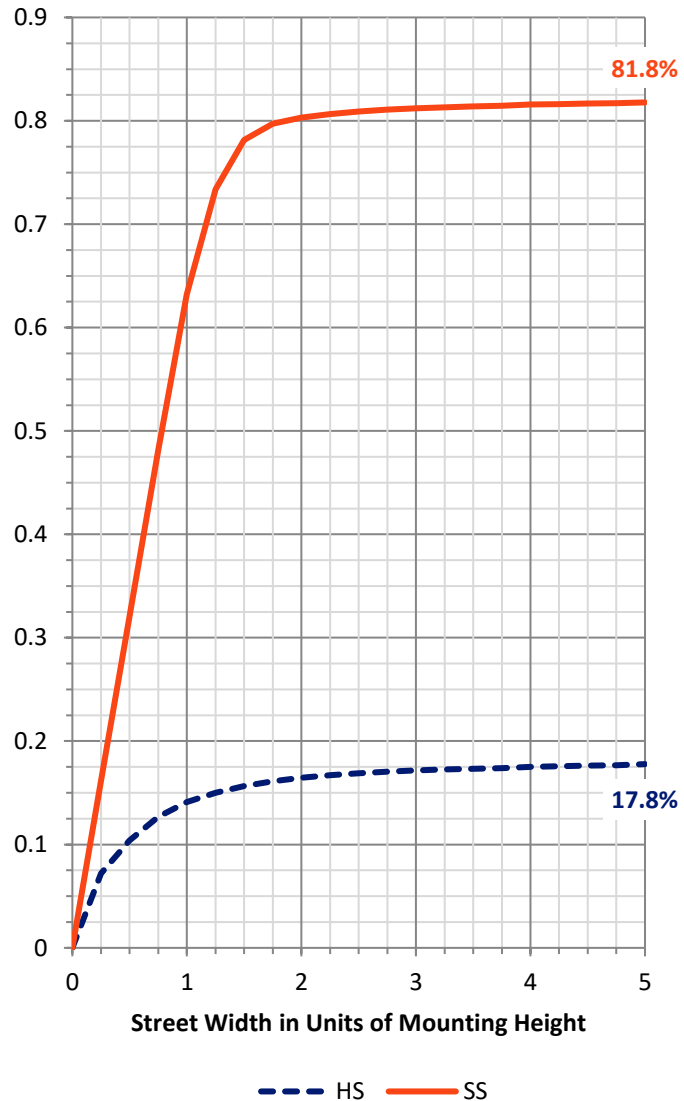

REPORT NUMBER: P951301


CATALOG NUMBER: GLAN-SB5C-730-U-AFL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	4663.2	12.1			
FM	(30°-60°)	20534.4	53.4			
FH	(60°-80°)	6185.6	16.1			G3/7500
FVH	(80°-90°)	130.0	0.3			G2/225
BL	(0°-30°)	2092.5	5.4	B3/2500		
BM	(30°-60°)	3253.9	8.5	B3/5000		
BH	(60°-80°)	1437.8	3.7	B3/2500		G3/2500
BVH	(80°-90°)	177.7	0.5			G2/225
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G3

Type II Short

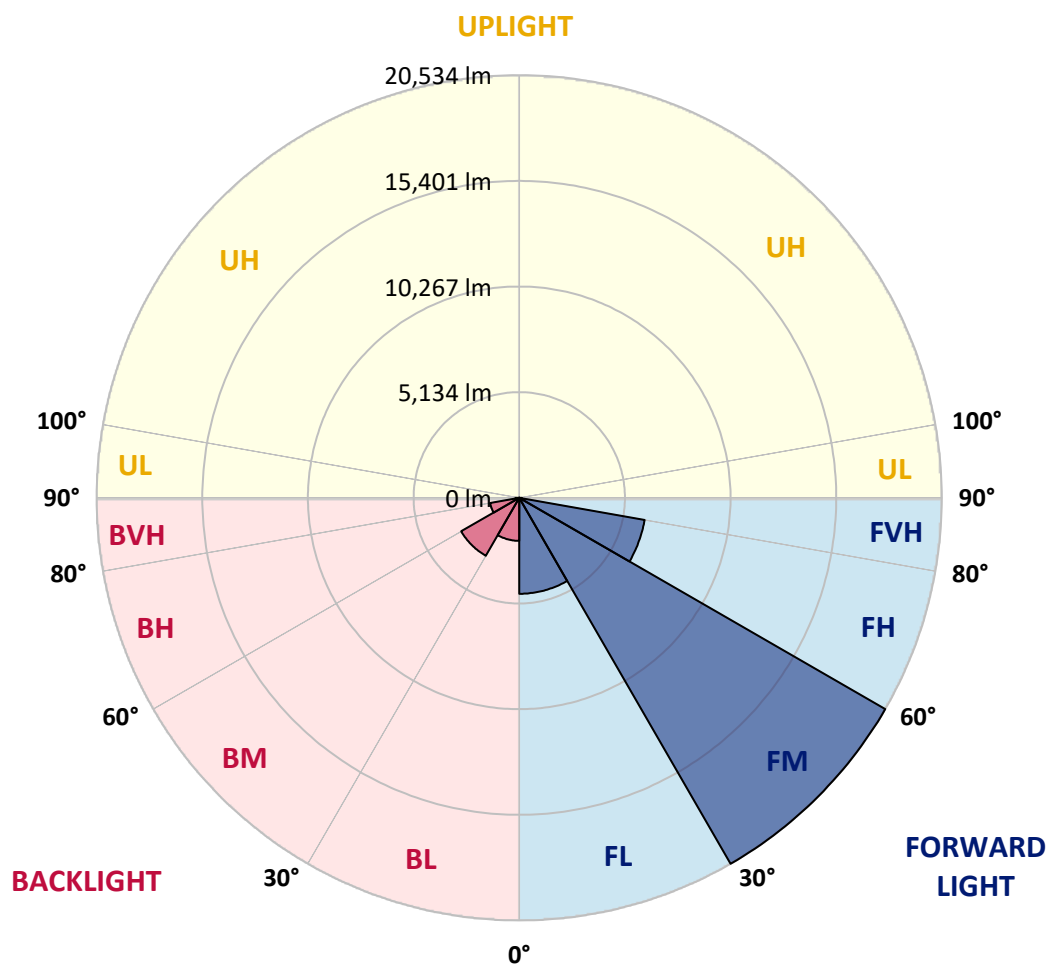

REPORT NUMBER: P951301

CATALOG NUMBER: GLAN-SB5C-730-U-AFL

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6
2.5°	11060.7	11052.8	11096.5	10947.3	10845.9	10708.7	10527.7	10296.9	10048.3	9785.8
5°	12057.2	11987.6	12033.3	11921.9	11810.6	11603.7	11335.2	10959.3	10499.8	9976.7
7.5°	11900.1	11852.3	11969.7	12069.1	12152.7	12126.8	11929.9	11536.1	10943.4	10183.6
10°	10633.1	10579.4	10744.5	11088.6	11593.8	12033.3	12272.0	12027.4	11396.9	10410.3
12.5°	9515.3	9489.4	9598.8	9877.3	10438.2	11281.5	12228.2	12457.0	11868.2	10678.8
15°	9037.9	9006.1	9075.7	9216.9	9574.9	10360.6	11830.5	12751.4	12331.7	10989.1
17.5°	8932.5	8896.7	8926.5	9000.1	9230.9	9829.5	11229.8	12896.5	12815.0	11335.2
20°	9127.4	9097.6	9101.6	9097.6	9258.7	9734.1	10812.1	12840.9	13236.7	11653.4
22.5°	9598.8	9549.1	9551.1	9445.7	9533.2	9901.1	10702.7	12691.7	13612.6	11931.9
25°	10366.6	10277.1	10295.0	10026.4	10002.6	10275.1	10873.8	12576.3	13986.5	12154.7
27.5°	11416.7	11315.3	11261.6	10861.8	10670.9	10806.1	11221.8	12616.1	14340.5	12347.6
30°	12729.5	12606.2	12496.8	11929.9	11583.8	11534.1	11762.8	12878.6	14758.2	12550.5
32.5°	14338.6	14195.4	13996.5	13244.6	12757.3	12496.8	12462.9	13346.1	15247.5	12809.0
35°	16253.9	16067.0	15784.5	14811.9	14195.4	13662.3	13385.8	14020.3	15917.8	13198.9
37.5°	18227.0	18016.2	17757.6	16600.0	15842.2	15056.6	14511.6	14935.3	16810.9	13727.9
40°	20046.9	19810.2	19569.6	18539.3	17725.8	16779.0	15890.0	16092.8	17902.8	14360.4
42.5°	21121.0	20945.9	20854.5	20297.5	19669.0	18708.3	17604.5	17465.2	19130.0	15088.4
45°	21073.2	21001.6	21284.1	21514.8	21365.6	20832.6	19613.3	18982.8	20361.2	15718.9
47.5°	19947.5	19995.2	20625.7	21922.5	22493.4	22771.8	21900.7	20472.6	21431.3	16190.3
50°	16884.5	16924.2	18384.1	21180.6	22783.8	24353.1	24170.1	21926.5	22260.7	16478.7
52.5°	14459.9	14485.7	15112.3	18980.8	21825.1	25148.7	26214.8	23296.9	22867.3	16558.3
55°	10891.7	10981.2	11683.3	14891.5	19330.9	24518.2	27459.9	24709.1	23251.2	16566.2
57.5°	6362.7	6460.2	7327.4	10108.0	15024.8	22320.3	27648.8	25962.2	23511.7	16502.6
60°	3116.7	3158.5	3536.4	5312.6	9264.7	18085.8	26129.2	26568.8	23656.9	16468.8
62.5°	2100.4	2094.4	2110.3	2621.5	4564.7	11619.6	22962.8	25506.7	23579.4	16339.5
65°	1806.0	1784.1	1724.4	1839.8	2364.9	5314.6	17741.7	22336.2	22988.6	16015.3
67.5°	1561.3	1563.3	1565.3	1529.5	1688.6	2452.4	10841.9	17594.5	20868.4	14479.8
70°	1292.8	1310.7	1318.7	1318.7	1376.4	1609.1	4628.4	12059.2	16460.8	11353.1
72.5°	1177.5	1139.7	1143.7	1123.8	1123.8	1225.2	1863.7	6836.1	10370.5	6386.6
75°	960.7	984.5	988.5	974.6	928.9	934.8	1105.9	2868.1	4437.4	2649.3
77.5°	829.4	829.4	837.4	827.4	791.6	700.1	737.9	1111.8	1509.6	1086.0
80°	666.3	664.3	698.1	718.0	662.3	517.1	471.4	614.6	670.3	477.4
82.5°	324.2	344.1	479.3	547.0	503.2	373.9	288.4	381.9	358.0	210.8
85°	189.0	179.0	214.8	304.3	288.4	206.9	139.2	198.9	187.0	107.4
87.5°	59.7	55.7	43.8	103.4	83.5	57.7	37.8	57.7	51.7	23.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P951301

CATALOG NUMBER: GLAN-SB5C-730-U-AFL

CANDELA DISTRIBUTION (continued):

90°		95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
9640.6	0°	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6	9640.6
9672.4	2.5°	9531.2	9296.5	9063.8	8851.0	8721.7	8638.1	8554.6	8461.1	8425.3	8371.6
9698.3	5°	9435.7	8982.2	8578.5	8230.4	7914.2	7665.5	7414.9	7212.0	7120.5	7182.2
9779.8	7.5°	9380.0	8723.7	8101.1	7462.7	6848.1	6356.8	5929.1	5628.8	5493.6	5527.4
9859.4	10°	9330.3	8431.3	7482.5	6474.1	5591.0	4982.4	4544.8	4316.1	4230.6	4248.5
9966.8	12.5°	9284.6	8103.1	6736.7	5410.0	4471.2	4069.5	3944.1	3946.1	3962.0	3974.0
10137.8	15°	9276.6	7707.3	5903.3	4479.2	3866.6	3840.7	3976.0	4061.5	4107.2	4121.2
10281.0	17.5°	9264.7	7233.9	5054.0	3844.7	3719.4	3894.4	4019.7	4075.4	4111.2	4113.2
10420.3	20°	9216.9	6633.2	4270.3	3542.4	3687.6	3838.7	3916.3	3960.1	3989.9	3999.8
10525.7	22.5°	9069.7	5965.0	3659.7	3407.1	3560.3	3681.6	3773.1	3822.8	3840.7	3852.7
10545.6	25°	8805.2	5217.1	3238.1	3277.8	3383.3	3536.4	3610.0	3619.9	3614.0	3631.9
10495.8	27.5°	8459.1	4415.5	2975.5	3102.8	3238.1	3369.3	3409.1	3403.1	3391.2	3411.1
10410.3	30°	8041.4	3695.5	2808.4	2905.9	3090.9	3210.2	3246.0	3232.1	3208.2	3230.1
10366.6	32.5°	7599.9	3106.8	2671.2	2768.7	2969.5	3086.9	3122.7	3108.8	3090.9	3108.8
10416.3	35°	7188.2	2695.1	2543.9	2677.2	2874.1	2989.4	3035.2	3037.2	3037.2	3059.1
10547.6	37.5°	6810.3	2454.4	2438.5	2619.5	2808.4	2911.9	2977.5	2981.5	2896.0	2901.9
10770.3	40°	6460.2	2353.0	2390.8	2581.7	2744.8	2844.2	2848.2	2625.5	2468.3	2464.3
11024.9	42.5°	6173.8	2333.1	2404.7	2577.7	2699.0	2703.0	2422.6	2249.5	2205.8	2207.8
11259.6	45°	5905.3	2327.1	2436.5	2577.7	2631.4	2335.1	2146.1	2100.4	2104.3	2120.3
11365.0	47.5°	5604.9	2303.2	2442.5	2541.9	2436.5	2076.5	2020.8	2000.9	1993.0	1996.9
11341.2	50°	5276.8	2217.7	2366.9	2470.3	2102.4	1965.1	1895.5	1889.5	1899.5	1905.4
11207.9	52.5°	4930.7	2078.5	2237.6	2341.0	1949.2	1867.7	1790.1	1804.0	1847.8	1861.7
11068.7	55°	4703.9	1915.4	2066.6	2082.5	1841.8	1776.2	1710.5	1742.3	1823.9	1849.8
10985.1	57.5°	4644.3	1742.3	1871.6	1853.7	1704.6	1696.6	1656.8	1684.7	1788.1	1825.9
10981.2	60°	4626.4	1587.2	1680.7	1666.8	1571.3	1609.1	1599.1	1613.1	1648.9	1660.8
10941.4	62.5°	4487.1	1463.9	1509.6	1489.7	1452.0	1517.6	1541.5	1511.6	1539.5	1553.4
10668.9	65°	4133.1	1364.4	1342.6	1328.6	1344.6	1404.2	1452.0	1392.3	1418.1	1457.9
9618.7	67.5°	3548.3	1229.2	1169.5	1185.4	1235.2	1267.0	1328.6	1261.0	1282.9	1350.5
7747.1	70°	2870.1	1058.1	1004.4	1050.2	1097.9	1163.6	1173.5	1127.8	1179.5	1255.0
4727.8	72.5°	2030.7	885.1	847.3	940.8	956.7	1042.2	1020.3	998.5	1070.1	1095.9
2337.1	75°	1408.2	714.0	692.2	763.8	821.4	895.0	879.1	905.0	1056.1	1068.1
1167.5	77.5°	891.1	554.9	541.0	586.7	666.3	747.9	773.7	1068.1	1804.0	1875.6
606.6	80°	517.1	413.7	397.8	433.6	503.2	578.8	745.9	1310.7	1189.4	1175.5
272.5	82.5°	288.4	284.4	264.5	274.5	336.1	417.7	1054.2	922.9	749.8	773.7
109.4	85°	135.3	167.1	143.2	137.2	189.0	489.3	704.1	527.1	350.1	342.1
23.9	87.5°	35.8	31.8	31.8	35.8	79.6	421.7	280.4	224.8	133.3	129.3
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF RI

